SINCE PASSIONE I ITALIANA

Collection Eleven

ED11




INDEX

| PRO | FESSIONAL | | | DISTIN | ITO |
|------|-----------|------------------|------------------|--------|-----|
| | 00 | 000//10 | 0001/11/0 | | 100 |
| page | 22 | COOKING | COOKING | page | 128 |
| page | 84 | REFRIGERATION | REFRIGERATION | page | 204 |
| page | 94 | VENTILATION | VENTILATION | page | 212 |
| page | 106 | DISHWASHERS | DISHWASHERS | page | 224 |
| page | 108 | ACCESSORIES | ACCESSORIES | page | 230 |
| | | | | | |
| page | 232 | PRODUCT DRAWINGS | PRODUCT DRAWINGS | page | 253 |
| page | 265 | TECHNICAL DATA | TECHNICAL DATA | page | 296 |



DESIGN OF MILANO



Milano is renowned the world over as the center of style and design. At Fulgor Milano we are inspired by this great city and its rich history of combining form and function with architecture. It is from this city which Sofia is born.

Sofia embodies a styling that is all her own, with an attention to detail and design that is unsurpassed in the industry. As it is with the Cathedral of Milano, our Sofia range stands out in a crowd. Drawing inspiration from the modern

cosmopolitan city of today, Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable.



POWER

OF ROME



Not unlike the incredible eternal city of Rome, our Sofia products are designed to stand the test of time. A product that embodies endurance and is built on a tradition of beauty, durability, and functionality.

Rome has survived over two
Millennia through evolution of
design and innovation.

Fulgor Milano's passion for innovation has resulted in premium products born from a culinary culture dating back to ancient Rome but in synergy with today's lifestyle. Every one of our Sofia products has been developed to offer a lifetime of performance in an ergonomic and comfortable design that is both elegant and simple to use.



LIKE VENICE



There is not a more unique city in the world than Venice. A city that by modern engineering standards should not exist.

A city built on the sea, that has inspired generations of visitors for centuries.

The original gateway to the east, Venice is a city whose architecture incorporates design aspects from the middle east and Asia, adding to its unique appeal. No other place influences the styling of Sofia more than Venice. Sofia's designer, having attended the school of Architecture at the University of Venice, drew his inspiration during this time in Venice. It is only fitting that this unique city influenced the unique design of our beautiful Sofia range.





SOFESSIONAL

DISCOVER THE ITALIAN CHARATERISTICS

DESIGN

POWER

UNIQUE

Sofia represents the beauty and sophistication that is Italy and the Meneghetti Family has paid tribute to all the unique cultural aspect of this storied country with Sofia and the complete line of Fulgor Milano products. Inspired by all the great regions of Italy, Sofia was born in the heart of the Veneto region, culturally rich in art and tradition. Sofia embodies a contemporary design that is feminine and powerful, which inspires us to prepare dishes worthy of admiration. The Meneghetti Family has presented us with a symbol of the ultimate expression of Italian excellence.

PROFESSIONAL LINE





SOFIA PROFESSIONAL



POWERFUL ELEGANCE

Sofia is a solid, generously sized freestanding range with a clean and rigorous style. Designed, developed and engineered in Italy to exceed all expectations of quality, performance and style. Sofia will captivate the most discerning chef with nuanced features that are traditional yet innovative.

SOFIA PROFESSIONAL









SOFIA IS AN INDIVIDUAL

We designed a professional range with a style and presence unique to her name. Sofia integrates the use of stainless steel and brushed aluminum for a design that is elegant and distinctive.

TOTAL CONTROL AND DELICATE POWER

Every aspect of Sofia is beautiful and her gas cooking surface is no exception. Every burner allows you to temper the most delicate chocolate or sear a steak to perfection.

TOTAL ACCESS AT YOUR FINGERTIPS

Choose multiple baking functions, timed bake, meat probe, and a variety of other customizable settings and baking features.

PROFESSIONALLY CRAFTED

This multifunction range, combines all the features of a fully-equipped professional range with a stainless steel design which highlights the elegance and uniqueness of Italian style.

14 FULGOR MILANO FULGOR MILANO 15




TRILAMINATE GRIDDLE

As if 6 powerful burners wasn't enough, the addition of a Trilaminate griddle allows additional versatility to the cooking surface. With 11,500 BTUs of even heat, Sofia sears with conviction and the easy to care for surface will be beautiful for its entire lifetime.

CAST IRON GRATES AND MATTE BURNER BASIN

Heavy duty cast iron grates form a continuous surface for easy movement of pots and pans. You will barely notice spillovers in this recessed burner basin and they will clean up easily, too.

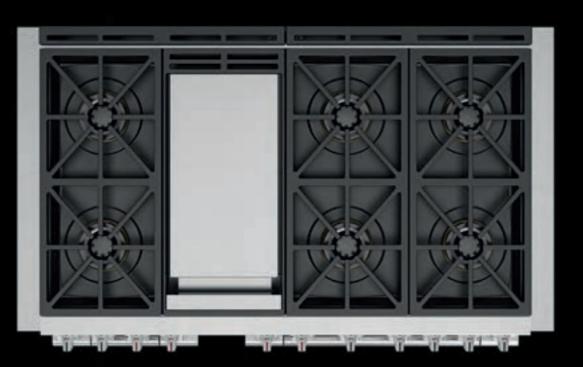



DUAL BURNER WITH BRASS BURNER RING

For perfect control, easy cleaning, and lasting performance, the brass burner ring and the precision flame ports remain corrosion free.




ROBUST CONTROL KNOBS

A perfect match for the bold design of the control panel, robust brushed metal knobs ensure easy handling and precise control while cooking.

FULGOR

MILANO

CRESCENDO BURNER

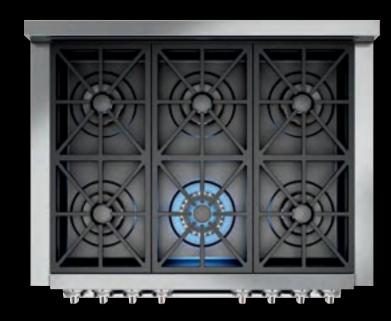

Because precision is important for powerful high and gentle low flames, our sealed burners offer five combinations of flame configurations for near infinite control. Durable brass burner rings provide exceptional heat distribution to the base of the cooking vessel at its maximum output of 20,000 BTUs and is also capable of the gentlest simmer aided by its oversized burner cap.



MEZZOFORTE

most powerful flame for cooking.

FORTE

Perfect al dente pasta is a snap. Progressive control of the burner ensures maximum heat distribution without excessive flame for an even and moderate boil.

At the peak of its 20,000 BTU capability, meat is seared to

produce a crust worthy of your favorite chef. Large pots quickly recover to a rigorous boil, and no culinary conquest seems unattainable. All burner rings engage to produce the



MEZZO

Creamy risotto and smooth custards come to life as the burner rings combine to provide enough heat to encourage the cooking but discourage scorching.



PIANOFORTE

Simmer, poach, or braise your way to a tender sauce, soup or stew. Flame curls around the diffuser cap to barely brush the base of the cooking vessel with perfect control for extended periods of low heat cooking.



PIANO

Melt butter, temper chocolate, or gently coax the flavor from savory vegetables, this lowest setting is achieved by the flame from the simmer burner rolling gently under the diffuser cap to radiate whisper soft heat.

18 FULGOR MILANO FULGOR MILANO 19



AUTOGRAPH YOUR KITCHEN MAKE IT EXCLUSIVELY YOURS!

Customize your Sofia kitchen with your chosen name. Visit the Fulgor Milano website to create your personalized name plate for the oven door. The complimentary plate will be delivered to your home where your unique Sofia kitchen is exclusively yours.



48 DUAL FUEL PRO SOFIA RANGE

THE ART OF COOKING EXPANDED

FULGOR

MILANO

Thoughtfully designed surface cooking with six burner positions, each with a 5 in 1 Crescendo burner beneath continuous cast iron grates and a Trilaminate Stainless Steel griddle, providing unparalleled power and control to melt, simmer, saute, and sear as you desire. Below the cooking surface, two self cleaning convection ovens with intuitive multiple baking and broiling functions and the convenience of telescoping racks encourages you to cook the way you want.



48 " DUAL FUEL PRO SOFIA RANGE

CAST IRON GRATES

Built to withstand searing heat and rapid temperature changes without losing their strength, continuous cast iron grates allow pans to be easily repositioned at your convenience.

TRILAMINATE GRIDDLE

Functional and beautiful with layers of two unique types of stainless steel for durability and easy cleaning form a three layer griddle with the addition of aluminum for even and consistent heat distribution.

UNSURPASSED CRAFTSMANSHIP

Superior Italian steelmaking craftsmanship ensures perfectly polished edges and smooth corners, concealing screws and welds for an impeccable finish.

COOL TOUCH DOOR

4 layers of thermo-reflecting glass ensure the safety of a cool touch door while the oven is on - even at its highest temperature during the self-clean cycle.

CONVENIENCE OVEN

Identically featured as its larger mate, but without meat probe, this self-cleaning, multi function convection oven does everything in a smaller space, adding efficiency and flexibility. It even has a telescopic rack.

SIX BURNERS

6 cooking zones, each with Crescendo burners create 5 levels of cooking power. At each level, the perfect combination of power and even distribution of heat allows precise results from temper to sear with a maximum 20,000 BTU. A combination of burner rings at different levels controls the relation of the flame to the bottom of the cooking vessel, allowing whisper soft heat for melting or rendering to ultra high searing and deglazing.

DUAL OVENS

Two self-cleaning convection ovens with multiple baking functions allow for ultimate flexibility, performance and capacity. Telescopic chrome oven racks allow for convenient inspection of dishes during cooking and effortless removal when done.

SOFT CLOSING DOOR


Robust stainless steel oven doors with wide viewing windows get an assist from shock absorbing hinges, facilitating an effortless soft closing oven.

EXCLUSIVE TRILAMINATE STAINLESS STEEL GRIDDLE

The ultimate in performance and beauty, heat is evenly and uniformly distributed across the griddle surface allowing for golden pancakes, perfectly crusted steaks, and everything in between. With an easy to clean surface, the griddle resists discoloration at even the highest temperatures to remain unaffected for years to come.

GRIDDLE BURNER

11,500 BTU tubular aluminum burner with evenly distributed flame ports conducts heat to the griddle for optimal performance at maximum power. 2,000 BTUs at low power for more delicate foods. Sear a steak or make a golden griddle cake with ease.

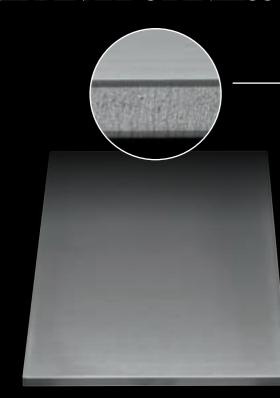

3 METAL LAYERS GRIDDLE

Provides unrelenting protection against corrosion, pitting, and discoloration, this non-reactive surgical stainless steel ensures easy cleaning and durability.

ALUMINUM

Allows for even heat distribution across the entire grilling surface from edge to edge for precise cooking and consistent browning.

STAINLESS STEEL

Establishes a stable and rigid foundation for a consistently flat and enduring direct cooking surface.



SOFIA PROFESSIONAL 48"

48" DUAL FUEL PROFESSIONAL RANGE

F6PDF486GS1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Trilaminate Stainless Steel Griddle



Dual True Convection



(accessory oven) Soft Closing Doors



Self Clean Ovens



Multi-level cooking



1 Telescopic Rack per Oven



Cool Touch Doors Digital Controls



Meat Probe (main oven)



Fast Pre-Heat

| OPTIONAL ACCESSORIES | | page |
|----------------------|-----------------|------|
| PDRKIT48 | Color kit | 114 |
| FMWOK | Wok ring | 121 |
| FMSIM | Simmer plate | 121 |
| F6BG48BCI | Island trim | 121 |
| F6BG48STD | Standard trim | 120 |
| F6BG48HBT | High back trim | 120 |
| FMTRP30 | Telescopic rack | 122 |
| FMTRP18 | Telescopic rack | 122 |
| TECHNICAL DWG | i | 238 |
| TECHNICAL DATA | ١ | 272 |

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates Trilaminate Stainless Steel Griddle with Tubular Gas Burner 11,500 BTU high / 2,000 BTU low

Matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG)

4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVENS

Dual True Convection in main oven and True Convection in accessory oven Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing doors Extra-large baking cavity and viewing area 3 Halogen lights on main oven 2 Halogen light on accessory oven Gross capacity 4.4 cu. ft. and 2.7 cu. ft. 2 chrome racks per oven

1 telescopic rack per oven

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe on main oven only Self-Clean Sabbath Mode

COOKING SURFACE

Heavy duty cast iron grates form a continuous surface for easy movement of pots and pans. You will barely notice spillovers in the recessed matte black burner basin and they will clean up easily, too.

Because precision is important for powerful high and gentle low flames, our sealed 6 Crescendo Dual burners offer five combinations of flame configurations for near infinite control.

Durable brass burner rings provide exceptional heat distribution to the base of the cooking vessel at its maximum output of 20,000 BTUs and is also capable of the gentlest simmer aided by its oversized burner cap.

OVEN

Perfect visibility and clean lines are essential components of Sofia's character. The wide glass, cool touch door is equipped with a shock absorber for stable, assisted closure (soft closing) of the oven.

The self-cleaning dual true convection oven with multiple baking functions allows for ultimate flexibility, performance and capacity with a full-extension rack with stainless glides.

The Sofia Dual Fuel Professional Range is also available in the 30" size, with 4 single Dual Flame Crescendo Burners and a dual true convection oven.

36" DUAL FUEL PRO SOFIA RANGE



page

F6PDF366S1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual True Convection



Soft Closing Door



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



Digital Controls



Meat Probe



Fast Pre-Heat

OPTIONAL ACCESSORIES

| PDRKIT36 | Color kit | 11 |
|-----------|-----------------|-----|
| FMWOK | Wok ring | 12 |
| FMSIM | Simmer plate | 12 |
| F6BG36BCI | Island trim | 12 |
| F6BG36STD | Standard trim | 120 |
| F6BG36HBT | High back trim | 120 |
| FMGRID36 | 36" Griddle | 12 |
| FMTRP36 | Telescopic rack | 12 |
| F6BG36ISL | 1" Island trim | 12 |

page

TECHNICAL DWG 239 **TECHNICAL DATA** 273

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Enameled Broiler Pan

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks 1 telescopic rack

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode



F6PDF304S1

N

Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual True Convection



Soft Closing Door



Self Clean Oven



1 Telescopic Rack



Cool Touch Door



Digital Controls



Meat Probe



Fast Pre-Heat

OPTIONAL ACCESSORIES

| PDRKIT30 | Color kit | 115 |
|-----------|-----------------|-----|
| FMWOK | Wok ring | 121 |
| FMSIM | Simmer plate | 121 |
| F6BG30BCI | Island trim | 121 |
| F6BG30STD | Standard trim | 120 |
| F6BG30HBT | High back trim | 120 |
| FMGRID30 | 30" Griddle | 121 |
| FMTRP30 | Telescopic rack | 122 |
| F6BG30ISL | 1" Island trim | 121 |
| | | |

TECHNICAL DWG 239 **TECHNICAL DATA** 273

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Fast Pre-Heat Self-Clean Sabbath Mode



FULGOR

MILANO

48"ALL GAS PRO SOFIA RANGE

Imagine all that you can create with the generous 48" All Gas Sofia Professional Range. With 6 crescendo burners and a trilaminate stainless steel griddle, the possibilities are endless. Give in to all your baking whims with two well appointed gas ovens. The main 30" multifunction oven features a large internal cavity and our new Nova Broiler system - the ultimate culinary experience is within your reach.



TRILAMINATE GRIDDLE

Functional and beautiful with two unique types of stainless steel, for durability and easy cleaning, form a three layer griddle with the addition of aluminum for even and consistent heat distribution.



OVEN CONTROL

Sofia's digital control display allows you to monitor temperature levels in the 30"



ITALIAN CRAFTSMANSHIP

Superior Italian steelmaking craftsmanship ensures perfectly polished edges and smooth corners, concealing screws and welds for an impeccable finish.



AUTOGRAPH YOUR KITCHEN

Visit the Fulgor Milano website to customize the nameplate of the oven door with your name.

The complimentary plate will be delivered to your home.



48" ALL GAS PROFESSIONAL RANGE

CODE ID

F6PGR486GS2



Heavy Duty Grates



Continuous Grate Surface




Dual Crescendo Burner





Single Convection



Soft Closing Doors



Digital Controls



Multi-level cooking



1 Telescopic Rack per Oven



Nova Broiler System

Cool Touch Doors



OPTIONAL ACCESSORIES page PDRKIT48 ... Color kit 114 **FMWOK** 121 Wok ring **FMSIM** 121 Simmer plate F6BG48BCI 121 Island trim F6BG48STD Standard trim 120 F6BG48HBT High back trim 120 FMTRP30 30" Telescopic rack 122 FMTRP18 18" Telescopic rack 122 **TECHNICAL DWG** 238 **TECHNICAL DATA** 274

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates Trilaminate Stainless Steel Griddle with Tubular Gas Burner 11,500 BTU high / 2,000 BTU low Matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

OVENS

Dual Convection in main oven and Convection in accessory oven Black Porcelain enamel interior Cool to the touch soft closing doors Extra-large baking cavity and viewing area 3 Halogen lights on main oven 2 Halogen light on accessory oven Gross capacity 4.4 cu. ft. and 2.7 cu. ft. 2 chrome racks per oven 1 telescopic rack per oven

NOVA BROILER SYSTEM

Intense heat sears meats and fish locking in juices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN FUNCTIONS

Bake Broil Convection Sabbath Mode (main oven)

36" ALL GAS PROFESSIONAL RANGE



F6PGR366S2



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual Convection



Soft Closing Door



Cool Touch Door



Multi-level cooking



Telescopic Rack



Digital Controls



Nova Broiler System



PDRKIT36 .. Color kit 115 **FMWOK** Wok ring 121 **FMSIM** 121 Simmer plate F6BG36BCI Island trim 121 F6BG36STD Standard trim 120 F6BG36HBT High back trim 120 FMGRID36 36" Griddle 121

page

122

121

OPTIONAL ACCESSORIES

| TECHNICAL DWG | 239 |
|----------------|-----|
| TECHNICAL DATA | 27 |

Telescopic rack

1" Island trim

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible)

NOVA BROILER SYSTEM

Intense heat sears meats and fish locking in juices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN

Dual Convection Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks 1 telescopic rack

Enameled Broiler Pan

OVEN FUNCTIONS

FMTRP36

F6BG36ISL

Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode

SOFIA PROFESSIONAL 30"

30" ALL GAS PROFESSIONAL RANGE

F6PGR304S2

 ∇

Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual Convection



Soft Closing Door



Cool Touch Door



Multi-level cooking



1 Telescopic Rack



Digital Controls



Nova Broiler System

OPTIONAL ACCESSORIES

page

| PDRKIT30 | Color kit | 11: |
|-----------|-----------------|-----|
| FMWOK | Wok ring | 12 |
| FMSIM | Simmer plate | 12 |
| F6BG30BCI | Island trim | 12 |
| F6BG30STD | Standard trim | 120 |
| F6BG30HBT | High back trim | 120 |
| FMGRID30 | 30" Griddle | 12 |
| FMTRP30 | Telescopic rack | 12 |
| F6BG30ISL | 1" Island trim | 12 |
| | | |

TECHNICAL DWG 239 **TECHNICAL DATA** 275

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible)

NOVA BROILER SYSTEM

Intense heat sears meats and fish locking in juices, with large broiling area. Ventilation in our All Gas Pro Ranges allows for closed door broiling, which ensures constant cooking.

OVEN

1 telescopic rack

Enameled Broiler Pan

Dual Convection Oven temperature electronic control Nova Broiler System Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks

OVEN FUNCTIONS

Bake Broil Convection Pizza cooking mode 590 °F Dehydrate Timer Sabbath Mode



1NDUCTION PRO SOFIA RANGE



The Sofia Induction Range features a powerful premium induction technology under an elegant glass surface featuring the new 11" Dual Max Power burner. The instant response and precise control of the induction are ensured by the presence of professional control knobs.

The wide glass, cool touch door is equipped with a shock absorber for stable, assisted closure (soft closing) of the oven.

The self-cleaning dual true convection oven offers an unsurpassed baking performance.





DUAL MAX POWER

Large pans receive full power for capacity and consistent heat distribution while cooking. The 11" Dual Induction Zone offers a fifth burner for any size pan at any power level for ultimate flexibility.

DIGITAL MINUTE MINDER CONTROL

Set it and forget it! The Digital Minute Minder chime will remind you of the end of the timer cycle.

COMMAND CONTROL KNOBS

Quick control, efficient and fast, a choice that combines style, practicality and professional touch.

 \bigcirc

30" INDUCTION PROFESSIONAL RANGE



F6PIR365S1



Easy Clean Ceramic Glass



Power Boost Burner



Dual Max Power



Pan Detection system



Residual Heat Sensor



Dual True Convection



Soft Closing Door



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



Digital Controls



Meat Probe



Fast Pre-Heat

OPTIONAL ACCESSORIES

| PDRKIT36 | Color kit | 115 |
|-----------|--------------------------|-----|
| F6BG36IND | Island trim | 120 |
| F6BG36STD | Standard trim | 120 |
| F6BG36HBT | High back trim | 120 |
| F6BG36BCI | Island trim | 121 |
| INDUKIT4 | Induction plate adapters | 122 |
| FMTRP36 | Telescopic rack | 122 |
| | | |
| TECHNICAL | L DWG | 239 |
| LOIMOA | | 20 |

page

276

SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones

1 Dual Max Power with Ø 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function

Digital Minute Minder / Pot Detection System Child Lock Function Failure Codes Indication

Automatic Heat-up Time

OVEN

Enameled Broiler Pan

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks 1 telescopic rack

OVEN FUNCTIONS

TECHNICAL DATA

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode



F6PIR304S1



Easy Clean Ceramic Glass



Power Boost Burner



Pan Detection system



Residual Heat Sensor



Dual True Convection



Soft Closing Door



Self Clean Oven



1 Telescopic Rack

Multi-level cooking



Cool Touch Door





Fast Pre-Heat

OPTIONAL ACCESSORIES page PDRKIT30 ... 115 Color kit F6BG30IND 120 Island trim F6BG30STD 120 Standard trim 120 F6BG30HBT High back trim 121 F6BG30BCI Island trim 122 INDUKIT4 Induction plate adapters

TECHNICAL DWG 239 **TECHNICAL DATA** 276

Telescopic rack

SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Pot Detection System Child Lock Function Failure Codes Indication Automatic Heat-up Time

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch soft closing door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks 1 telescopic rack Enameled Broiler Pan

OVEN FUNCTIONS

FMTRP30

Bake Broil Roast Convection True Convection Warm / Proof / Dehydrate Electronic cooking programmer Meat Probe Self-Clean Sabbath Mode

42 FULGOR MILANO

122

SOFIA


PROFESSIONAL 30" DOUBLE OVEN

With striking beauty and bold performance, the Sofia professional double oven features dual true convection, cool touch soft-close doors, concealed bake elements, and multiple cooking modes ensures you can handle whatever culinary challenges come your way. From defrost to intensive broiling and everything in between, there is no cooking task this oven can't handle. A meat probe in the upper oven ensures perfect results for your roasts. Self-clean in each oven means your oven will remain beautiful and functional throughout its life.







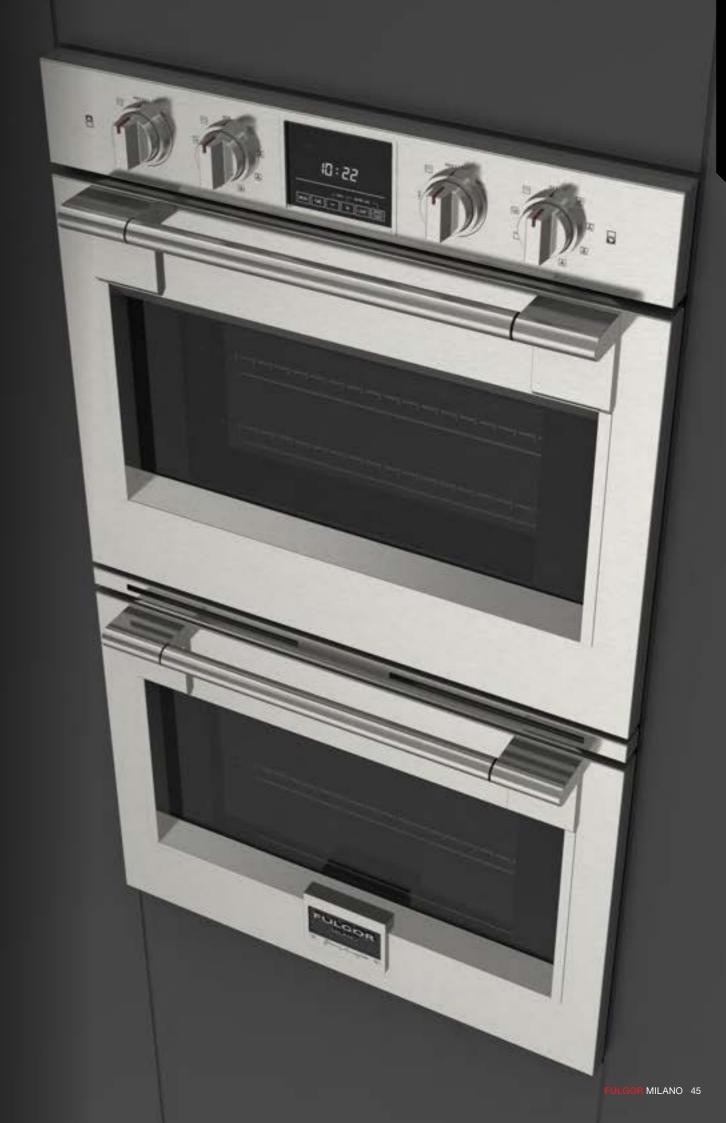

30" PROFESSIONAL DOUBLE OVEN - STAINLESS STEEL

30" PROFESSIONAL SINGLE OVEN - STAINLESS STEEL



F6PSP30S1



Soft Closing Door

Self Clean Oven

Multi-level cooking

1 Telescopic Rack

Cool Touch Door

Digital Controls

Meat Probe

Fast Pre-Heat

Interior Lighting



F6PDP30S1

⊗ ⊗ Dual True Convection

Soft Closing Doors

Self Clean Ovens

Multi-level cooking

1 Telescopic Rack per oven

Cool Touch Doors

Digital Controls

Meat Probe (Upper Oven Only)

Fast Pre-Heat

. 1

Interior Lighting

SPECIFICATIONS

Enameled Broiler Pan

OVEN

Knob and electronic controls
Dual True Convection
Self-cleaning oven with Multifunction baking
Black Porcelain enamel interior
Cool to the touch soft closing door
Extra-large baking cavity and viewing area
3 Halogen lights for flawless visibility
Gross capacity 4.4 cu. ft.
2 chrome racks
1 telescopic rack

OVEN FUNCTIONS

Bake
Broil
Roast
Convection
True Convection
Warm / Proof / Dehydrate
Electronic cooking programmer
Meat Probe
Self-Clean
Sabbath Mode

OPTIONAL ACCESSORIES

PDRKIT30 ... Color kit 116
FMTRP30 Telescopic rack 122

TECHNICAL DWG
TECHNICAL DATA 244

SPECIFICATIONS

OVENS

Knob and electronic controls
Dual True Convection
Self-cleaning oven with Multifunction baking
Black Porcelain enamel interior
Cool to the touch soft closing door
Extra-large baking cavity and viewing area
3 Halogen lights per oven for flawless visibility
Gross capacity 4.4 cu. ft. per oven
2 chrome racks per oven
1 telescopic rack per oven
Enameled Broiler Pan

OVEN FUNCTIONS

Bake
Broil
Roast
Convection
True Convection
Warm / Proof / Dehydrate
Electronic cooking programmer
Meat Probe (Upper Oven Only)
Self-Clean
Sabbath Mode

PODKIT30 ... Color kit upper door 116 PDRKIT30 ... Color kit lower door 116 NOTE: For color kit purchase order, remember to order both color kits for the upper and lower door. FMTRP30 Telescopic rack 122

244

277

TECHNICAL DWG

TECHNICAL DATA

46 FULGOR MILANO 47

page

PROFESSIONAL 30" WARMING DRAWER



More than a warming drawer, this functional appliance can slow cook, proof, leaven, and defrost in its compact and fully enclosed space. Warm plates, hold side dishes warm for serving, keep pies warm for dessert, allow homemade bread to rise to perfection.

SOFIA PROFESSIONAL 30"

30" PROFESSIONAL WARMING DRAWER - STAINLESS STEEL





CODE ID

F6PWD30S1



Sliding Telescopic Rails



Keep Warm Function



Leavening



Slow Cooking



Thawing



Soft Closing

SPECIFICATIONS

WARMING DRAWER 30"

Knob Control

Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft.

Convection heating system for even heat distribution All stainless steel structure

Warming Temperature range; min. 86 °F up to 190 °F Slow closing assistance

2 Internal lights

Non-slip rubber mat

DRAWER 30" FUNCTIONS

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F

OPTIONAL ACCESSORIES page PWDKIT30 ... Color kit 117 **TECHNICAL DWG** 244 **TECHNICAL DATA** 278



SOFIA

SPECIALTY OVENS

SPEED OVEN

A premium kitchen is not complete without a combi speed oven. Microwave, bake, broil, or use any of the combination cook modes to enjoy the benefits of speed cooking. Enjoy all the benefits of our combi speed steam oven without compromising the look of your Sofia built-in in appliances.

STEAM OVEN

Have you considered the benefits of cooking with steam? Steam, bake, broil, or use one of the combination cooking modes and achieve beautiful and healthy results. Enjoy all the benefits of our combi steam oven without compromising the look of your Sofia built in appliances.



CODE ID

30" PROFESSIONAL COMBI STEAM OVEN

F6PSCO30S1

30" PROFESSIONAL COMBI SPEED OVEN



F6PSPD30S1

Microwave Cooking

Thawing

True Convection

Cool Touch Door

Automatic Cooking



Multi-level cooking



Steam Cooking



Steam Limescale Filter



True Convection





Cool Touch Door



Multi-level cooking

SPECIFICATIONS

FEATURES

3 in 1 Oven: Microwave, Convection, and Combi Stainless Interior with broiler Quick Access Menu Automatic Programs 240 Volt Connection

PERFORMANCE

10 Combined Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Microwave mode (6 levels) Fan assisted mode Combined Cooking mode Microwave and Grill mode Defrosting by time and weight

page

TECHNICAL DWG 245 **TECHNICAL DATA** 279 **SPECIFICATIONS**

FEATURES

3 in 1 Oven: Steam, Convection, and Combi-steam Stainless Interior with broiler Quick Access Menu Automatic Programs Meat Probe 240 Volt Connection Steam Generator

PERFORMANCE

12 Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Steam System Combined Cooking Functions Steam Recovery Cycle CLEAN, assisted cleaning cycle for oven interior and steam circuit

TECHNICAL DWG TECHNICAL DATA

FULGOR MILANO 53

page

245

279

NEW

SOFIA

PROFESSIONAL



Our built-in coffee machine is your personal barista: from storing coffee beans to grinding fresh beans for brewing, to automatically storing puck-grounds into the waste tray. Enjoy barista-style coffee, from espresso to cappuccino, and your favorite Americano at the touch of a button right at home. This easy-to-use, made in Italy, professional quality unit is the perfect complement to your Fulgor Milano cooking products. Shown here with our unique 30" Pro frame kit it matches perfectly when installed over our other 30" Sofia built-in products.

SOFIA PROFESSIONAL 30"

30" BUILT-IN COFFEE MACHINE



CODE ID


F7BC24B1 F6PTK30BC







Cappuccino Maker



Programmable Temperature



Automatic Coffee Grinder

NOTE

The Fulgor Milano badge, included in the frame kit, is optional and its position can be decided by the installer or customer. Both codes are required and sold separately.

F7BC24B1 Coffee Machine F6PTK30BC Pro Frame Kit

page

TECHNICAL DWG 246 **TECHNICAL DATA** 280

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)

SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

SOFIA

PRO GAS RANGETOP



Style and performance are the most appropriate description for the Professional Rangetop. The combination of solid materials and efficient technologies allows us to offer versatile and functional solutions. The sturdiness of the stainless steel structure, combined with the heavy duty continuous grates of the gas versions, the perfectly matte burner basin, the steel knobs with the modulation of the maximum power levels to that for simmer cooking of the Crescendo gas burners offer those who appreciate infinite possibilities to cook recipes like a chef.





SOFIA RANGETOP 48" GAS

This product has all the features one would expect from a truly pro style cook top, starting with its gas powered trilaminate griddle, and 6 Crescendo dual flame burners. Each burner providing the perfect combination of power and even distribution of heat allows precise results from temper to sear with a maximum 20,000 BTUs. The combination of inner and outer burner rings are easily controlled with the pro style knobs which can allow everything from a whisper soft heat for melting or rendering chocolate, to instantly activating both rings and providing ultra high temperatures for searing and boiling.



TRILAMINATE GRIDDLE

Our trilaminate griddle is functional and beautiful; with two unique types of stainless steel, chosen for durability and easy cleaning, form a three layer griddle with the addition of aluminum for even and consistent heat distribution.



CAST IRON GRATES

Built to withstand searing heat and rapid temperature changes without losing their strength, continuous cast iron grates allow pans to be easily repositioned at your convenience.



PORCELAIN BURNER BASIN

The elegant yet robust continuous grates sit atop the one piece burner bowl, with its smooth corners and velvet matte black porcelain finish, allowing for seamless, easy cleaning.

CODE ID

48" PROFESSIONAL GAS RANGE TOP

F6GRT486GS1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Trilaminate Stainless Steel Griddle



Professionally Styled Knobs

36" PROFESSIONAL GAS RANGE TOP

F6GRT366S1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Professionally Styled Knobs

3 Heavy Duty, continuous cast iron grates Matte finish porcelain burner bowl Tubular Gas Burner 11,500 BTU high / 2,000 BTU low for the trilaminate griddle 6 Dual-Flame Crescendo Burners 4 X 18,000 BTU max (NG) 2 X 20,000 BTU max (NG) Natural Gas (LP convertible) Flat Griddle

OPTIONAL ACCESSORIES page **FMWOK** Wok ring 121 **FMSIM** Simmer plate 121 F6BG48BCI Island trim 121 F6BG48STD Standard trim 120 F6BG48HBT High back trim 120 **TECHNICAL DWG** 241 **TECHNICAL DATA** 281

GAS RANGE TOP 3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 6 Dual-Flame Crescendo Burners 2 X 20,000 BTU max (NG) 4 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors

SPECIFICATIONS

Wok ring **FMWOK** 121 **FMSIM** Simmer plate 121 F6BG36BCI Island trim 121 F6BG36STD Standard trim 120 F6BG36HBT High back trim 120 FMGRID36 Griddle 121 F6BG36ISL 1" Island trim 121 **TECHNICAL DWG** 241 **TECHNICAL DATA** 282

OPTIONAL ACCESSORIES

60 FULGOR MILANO

page



F6GRT304S1

Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Professionally Styled Knobs



SPECIFICATIONS

GAS RANGE TOP

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 4 Dual-Flame Crescendo Burners 1 X 20,000 BTU max (NG) 3 X 18,000 BTU max (NG) Natural Gas (LP convertible) Electric Re-ignition system Flame-out Sensing Top Mount Injectors



| OPTIONAL ACCESSORIES | | page | |
|----------------------|----------------|------|--|
| EL BLIGHT | | | |
| FMWOK | Wok ring | 121 | |
| FMSIM | Simmer plate | 121 | |
| F6BG30BCI | Island trim | 121 | |
| F6BG30STD | Standard trim | 120 | |
| F6BG30HBT | High back trim | 120 | |
| FMGRID30 | Griddle | 121 | |
| F6BG30ISL | 1" Island trim | 121 | |
| TECHNICAL DWG | | 241 | |
| TECHNICAL DATA | | 272 | |
| | | | |



SOFIA

PRO INDUCTION RANGETOP



DUAL MAX POWER


Large pans receive full power for capacity and consistent heat distribution while cooking.

The 11" Dual Induction Zone offers a fifth burner for any size pan at any power level for ultimate flexibility in your 36" induction rangetop.



PROFESSIONAL STYLE KNOBS

Can a professional rangetop be called that without pro style knobs? Fulgor Milano was not willing to compromise on this expectation, while still offering all of the unique functions and technologies expected from an induction cook top.



INDUCTION SPECIFIC ISLAND TRIM

We specifically designed an elegant low profile island trim for our induction range top to match the same profile of our Sofia control panel.



The Sofia induction rangetop features powerful premium induction technology under an elegant glass surface featuring a new 11" Dual Max Power burner (36" model). The instant response and precise control of induction is highlighted by the Digital Minute Minder control, paired beautifully with the easy to clean surface, offering maximum performance while minimizing energy consumption.

 \bigcirc

36" PROFESSIONAL INDUCTION RANGE TOP



F6IRT365S1



Power Boost Burner

Pan Detection system

Digital Controls

Residual Heat Sensor

Warming Function

Professionally Styled Knobs



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL INDUCTION RANGE TOP

F6IRT304S1



Easy Clean Ceramic Glass



Power Boost Burner



Pan Detection system



Digital Controls



Residual Heat Sensor



Warming Function



Professionally Styled Knobs

INDUCTION RANGE TOP

Digital Display for Power Level Automatic Heat-up Time

SPECIFICATIONS

4 Single Induction cooking zones 1 Dual Max Power with Ø 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power-on Indicators Melting and Simmering function Knob Controlled Digital Minute Minder Pot Detection System Child Lock Function Failure Codes Indication


page F6BG36IND Island trim 120 F6BG36STD Standard trim 120 F6BG36HBT High back trim 120 F6BG36BCI Island trim 121 INDUKIT4 Induction plate adapters 122 **TECHNICAL DWG** 242 **TECHNICAL DATA** 283

OPTIONAL ACCESSORIES

SPECIFICATIONS

INDUCTION RANGE TOP

4 Single Induction cooking zones Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Booster function for each cooking zone Residual heat and Power on Indicators Melting and Simmering functions Pot Detection System Child Lock Function Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time



| OPTIONAL ACCESSORIES | | |
|----------------------|--------------------------|-----|
| F6BG30IND | Island trim | 120 |
| F6BG30STD | Standard trim | 120 |
| F6BG30HBT | High back trim | 120 |
| F6BG30BCI | Island trim | 121 |
| INDUKIT4 | Induction plate adapters | 122 |
| | | |
| TECHNICAL | 242 | |
| TECHNICAL DATA | | |

66 FULGOR MILANO FULGOR MILANO 67



SOFIA

PROGAS COKTOP



STRONG, POWERFUL, DISTINCTIVE

With sleek lines, a continuous surface grate over powerful brass burners, and LED illuminated controls, the Sofia cooktop combines elegant design, responsive performance, and thoughtful convenience. Sofia enters a new realm with this low profile cooktop allowing design flexibility for your kitchen. Enjoy the power of a 20,000 BTUs Dual Brass Burner of this Sofia cooktop while using the additional 4 Dual Stack Burners, designed to surpass all of your expectations. New Halo Effect knobs let you know at a glance if the gas is on or if the cooktop was recently used, giving you peace of mind at every turn. Continuous cast iron grates offer an even cooking surface for easy movement of pans from burner to burner so that even your biggest cooking events can be handled with ease.

HALONISION HEAT MADE VISIBLE



HALO CONTROL for when the gas is on

Have you ever walked away from your cooktop forgetting a burner is on?

Whether you are searing a steak or tempering chocolate, the glowing halo of white light will alert you to a burner that is on. Walk away from the kitchen with confidence, knowing that your burners are safely off when the halo disappears.





HALO SAFE residual heat indicator

A Professional cooktop would not be complete without powerful burners and strong cast iron grates. These grates can continue to radiate a heat, even after the burner is off. Protect yourself and your family with our Halo Safe system. A red Halo light around the control knob indicates the presence of residual heat at the grate.

36" PROFESSIONAL PRO GAS COOKTOP



F6PGK365S1

-<u>`</u>

Knob control with back light system



1 Central Dual Crescendo Burner



4 Stacked Burners



Heavy Duty Grates



Heavy Duty Control Panel



SOFIA PROFESSIONAL 30"

30" PROFESSIONAL PRO GAS COOKTOP

F6PGK305S1




Knob control with back light system



1 Central Dual Crescendo Burner







Heavy Duty Control Panel

Continuous Grate Surface





SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 4 Solid Brass Stacked Burners with 15.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area Full pot stability



| OPTIONAL ACCESSORIES | | page |
|----------------------|--------------------------|------------|
| FMWOK FMSIM | Wok ring Simmer plate | 121 121 |
| TECHNICAL DWG | | 253 |

284

TECHNICAL DATA

SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG) 2 Solid Brass Rapid Burners with 10.500 BTU Max (NG) 2 Solid Brass Semirapid Burners with 8.000 BTU Max (NG) Backlit Control Knob indicates burner operation (White) Backlit Control Knob indicates residual heat (Red) Heavy duty control panel Large cooking area Full pot stability Natural Gas (LP Convertible)

OPTIONAL ACCESSORIES page

FMWOK Wok ring 121 **FMSIM** Simmer plate 121

NOTE:

Wok ring (FMWOK) to be used with centre burner only.

TECHNICAL DWG 243 **TECHNICAL DATA** 285

72 FULGOR MILANO

Natural Gas (LP Convertible)





ACCENTO PRO RANGE

Inspired by traditional professional styling, our ACCENTO professional range features a classic bullnose design over elegant yet strong knob controls. The ACCENTO professional range will stand out in your kitchen with color kits that are customizable and allow for multiple variations of color expression. Newly designed continuous cast iron grids offer a safe support surface while ensuring the achievement of professional performance and optimal thermal dynamics.



ACCENTO's traditional bullnose allows this handcrafted range to be added to any package and becomes the perfect replacement range.



One piece matte black, porcelain Accentuate the satin stainless steel burner bowl allows for seamless, easy cleaning.

The matte black is a perfect compliment to the grates and burner caps.



finish of the ACCENTO range with a customizable color kit of your cho-




STYLE DETAILS

ACCENTO





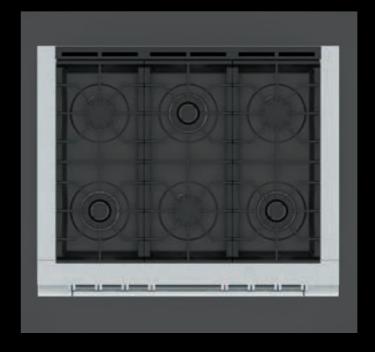









ITALIAN CRAFTSMANSHIP

PROFESSIONAL PERFORMANCE

ACCENTO



Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable. With the kitchen returning to the center of the home, color is an important component of design and can bring unity and harmony into your space.





30" DUAL FUEL PROFESSIONAL RANGE

page

36" DUAL FUEL PROFESSIONAL RANGE





F4PDF366S1

Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual True Convection



Self Clean Oven




Multi-level cooking



Cool Touch Door



Digital Controls



240

286

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 3 Dual-Flame Crescendo Burners 3 X 18,000 BTU max (NG) 3 Rapid Burners 3 X 15,000 BTU max(NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks Enameled Broiler Pan

OVEN FUNCTIONS

TECHNICAL DWG

TECHNICAL DATA

Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode



F4PDF304S1



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual True Convection



Self Clean Oven



Multi-level cooking



Cool Touch Door



Digital Controls

| OPTIONAL ACCESSORIE | S |
|---------------------|---|
| - | |

| ACDKIT30 | Color kit | 119 |
|-----------|-----------------|-----|
| FMWOK | Wok ring | 121 |
| FMSIM | Simmer plate | 12 |
| F6BG30BCI | Island trim | 12 |
| F6BG30STD | Standard trim | 120 |
| F6BG30HBT | High back trim | 120 |
| FMGRID30 | Griddle | 121 |
| FMTR630 | Telescopic rack | 122 |
| F6BG30ISL | 1" Island trim | 12 |
| | | |

TECHNICAL DWG 240 **TECHNICAL DATA** 287

SPECIFICATIONS

COOKING SURFACE

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 2 Dual-Flame Crescendo Burners 2 X 18,000 BTU max (NG) 2 Rapid Burners 2 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks Enameled Broiler Pan

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode

30" ALL GAS PROFESSIONAL RANGE

36" ALL GAS PROFESSIONAL RANGE





F4PGR366S2



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual Convection



Cool Touch Door



Multi-level cooking



Digital minute minder

OPTIONAL ACCESSORIES page ACDKIT36 ... Color kit 119 **FMWOK** Wok ring 121 **FMSIM** 121 Simmer plate F6BG36BCI Island trim 121 F6BG36STD Standard trim 120 F6BG36HBT High back trim 120 FMGRID36 Griddle 121 FMTRP36 Telescopic rack 122 F6BG36ISL 1" Island trim 121 **TECHNICAL DWG** 240 **TECHNICAL DATA** 288

SPECIFICATIONS

COOKING SURFACE

3 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 3 Dual-Flame Crescendo Burners 3 X 18,000 BTU max (NG) 3 Rapid Burners 3 X 15,000 BTU max (NG) Natural Gas (LP convertible)

OVEN

Dual Convection Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 5.7 cu. ft. 2 chrome racks Enameled Grill set

OVEN FUNCTIONS

Bake Broil Convection Dehydrate Timer



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual Convection



Cool Touch Door



Multi-level cooking

Digital minute minder

F6BG30STD

ACDKIT30 ...

FMWOK

FMSIM Simmer plate 121 F6BG30BCI Island trim 121 Standard trim 120 F6BG30HBT High back trim 120 FMGRID30 Griddle 121 FMTR630 Telescopic rack 122 F6BG30ISL 1" Island trim 121

page

121

240

289

Color kit 119

Wok ring

OPTIONAL ACCESSORIES

TECHNICAL DWG TECHNICAL DATA

OVEN FUNCTIONS

Bake Broil Convection Dehydrate Timer

SPECIFICATIONS

COOKING SURFACE

Natural Gas (LP convertible)

2 Heavy Duty, continuous cast iron grates One piece, matte finish porcelain burner bowl 2 Dual-Flame Crescendo Burners 2 X 18,000 BTU max (NG) 2 Rapid Burners 2 X 15,000 BTU max (NG)

OVEN

Dual Convection Black Porcelain enamel interior Cool to the touch door Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks Enameled Grill set















SOFIA PRO REFRIGERATION & WINE

COLD TEMP. TOTAL CONTROL

As beautiful as it is functional, the Sofia Professional Refrigeration and Wine Series features brushed stainless exteriors for maximum impact and a brilliant white aluminum interior. Food preservation is key and like the rest of the Professional Series, we combine the latest technology to ensure the highest performance.

Dual compressors provide independently controlled cooling zones with consistent and precise temperatures throughout, to ensure that the finest foods and wines stay fresher longer.

Robust doors on the Refrigerator and triple layer UV protected glass on the Wine Cellar protect contents from external temperature and humidity changes which can be damaging to your stored items.

PRO REFRIGERATION & WINE





FLEXZONE

Refrigeration, Fresco, or Freezer: you can decide on a whim! Need more space for cold drinks? Turn the bottom Flexzone drawer into a Fresco compartment through a simple menu. You have the flexibility to manage your food preservation how you desire.

ICE MAKER

Located in the upper section of the Flexzone drawer, the ice maker uses purified water from the integrated filtering system to produce up to 2.2 lbs of your desired sized cube. Activate SuperIce and increase ice production to 3.3 lbs.

WINE CELLAR

Natural beechwood shelves accommodate various sized bottles for secure storage and can even be completely removed for greater flexibility. In addition to humidity and temperature control, Wine Cellars utilize anti-vibration technology and triple pane bronze glass doors to reduce UV rays, protecting your wine collection from external conditions.



RIGHT HINGE

LEFT HINGE

Cool Zone 0°C

Deep-freezing

Hot air ventilation

Total No Frost

LED lighting

Holiday Mode

Ice Maker

Rapid Deep Freezing

Noise Level 41 (dB)

Freestanding Installation

CODE ID

SOFIA PROFESSIONAL WINE CELLAR 24"

24" PROFESSIONAL WINE CELLAR



F7PBW24S1-R (RIGHTHINGE)

CODE ID

CODE ID

F7PBW24S1-L (LEFT HINGE)



RIGHT HINGE



LEFT HINGE





Deep-freezing



Hot air ventilation



Rapid Deep Freezing



LED lighting



Noise Level 41 (dB)



Freestanding Installation



Holiday Mode



Triple Pane Glass



54 Bottles Capacity

OPTIONAL ACCESSORIES page REFSBSPRO60 124 Coupling kit with a 36" fridge

250

293

TECHNICAL DWG

TECHNICAL DATA

SOFIA PROFESSIONAL FRIDGE 36"

36" PROFESSIONAL FRIDGE

SPECIFICATIONS

FRIDGE

Refrigeration Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

OPTIONAL ACCESSORIES page REFSBSPRO60 124 Coupling kit with a 24" wine cellar REFSBSPR072 124 Two 36" Fridges coupling kit

TECHNICAL DWG 250 **TECHNICAL DATA** 292

SPECIFICATIONS

WINE CELLAR

Cave Storage Compartment Natural Wood Shelves for 36 bottles Wine Cellar Compartment Natural Wood Shelves for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior FlexZone Bottom Drawer

36" PROFESSIONAL BUILT-IN FRIDGE

CODE ID

24" PROFESSIONAL BUILT-IN WINE CELLAR

F7IBW2401-R (RIGHT HINGE)

CODE ID

F7IBW24O1-L (LEFT HINGE)



RIGHT HINGE



LEFT HINGE



Deep-freezing



Hot air ventilation



Rapid Deep Freezing



LED lighting



Noise Level 41 (dB)



Integrated Installation




Holiday Mode



Triple Pane Glass



54 Bottles Capacity



SPECIFICATIONS

FRIDGE

1.1 1.1

LJ

Overlay Panel Refrigeration Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Crisper Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

RIGHT HINGE



F7IBM3601-R (RIGHT HINGE)

F7IBM36O1-L (LEFT HINGE)



LEFT HINGE



Cool Zone 0°C



Deep-freezing



Hot air ventilation



Total No Frost



Rapid Deep Freezing



Noise Level 41 (dB)



Integrated Installation



Holiday Mode



Ice Maker



OPTIONAL ACCESSORIES

SPECIFICATIONS

WINE CELLAR

Overlay Panel Cave Storage Compartment Natural Wood Shelves for 36 bottles Wine Cellar Compartment Natural Wood Shelves for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting

Brilliant white aluminium interior FlexZone Bottom Drawer

OPTIONAL ACCESSORIES page REFHANDPRO24 124 Sofia Wine Cellar Pro Handle Kit REFSBSINT60 124 Coupling kit **TECHNICAL DWG** 251

293

TECHNICAL DATA

page REFHANDPRO36 124 Sofia Fridge Pro Handle Kit REFSBSINT60 124 Coupling kit **TECHNICAL DWG** 251 **TECHNICAL DATA** 292

36" FRENCHDOOR

REFRIGERATOR

The Fulgor Milano freestanding counter depth French-door unit opens wide to reveal features like an internal water dispenser, adjustable fresh zone drawer, tri-level slide-out freezer baskets and self-closing freezer drawer.



PRO HANDLE KIT

Once the Pro Handle Kit with Pro Fulgor Milano badge is installed, our counter-depth french door fridge is a perfect complement to any of our professional ranges or professional built-in cooking appliances.

COUNTER-DEPTH STYLE

Limited on space and can't fit a full height built-in fridge, or simply want to have the look without blowing the budget? The new Fulgor Milano counter-depth fridge allows you to achieve a beautiful look without compromise.

36" FRENCH DOOR FRIDGE

36" FRENCH DOOR FRIDGE SHOWN WITH PRO HANDLE KIT



SPECIFICATIONS

FRIDGE

Duo Cycling Cooling Ion Fresh Inner Digital Display Sabbath Mode Large Pantry Drawer Height Adjustable Cantilever Shelves Interior Filtered Water Dispenser Interior Theatre Lighting with LED lights

FREEZER FEATURES

Automatic Ice Machine Large Freezer Drawer

CODE ID

F6FBM36S2 F6HK36FFBS



Fingerprint-Proof Stainless Steel



ION Fresh



LED Lighting



Ice Maker



Total No Frost



Holiday Mode

NOTE:

The Fulgor Milano badge, included in the Pro Handle Kit, is optional and its position can be decided by the installer or by the customer.

F6FBM36S2 F6HK36FFBS French Door Fridge Pro Handle Kit



| REQUIRED ACCESSORIES | pag |
|--|-----|
| F6HK36FFBS Sofia French Door Pro Handle Kit | 12 |
| TECHNICAL DWG | 25 |
| TECHNICAL DATA | 29 |



FULGOR MILANO

SOFIA

PRO VENTILATION

Complete your powerful Sofia cooking suite with a matching wall mounted ventilation hood designed to keep your kitchen environment free from smoke, cooking residue, and excess heat. The dual motor, in a sturdy housing, combines with Pro Baffle filters to quietly whisk away the effects of your culinary adventures. Your hood allows fresh air to circulate freely in your home, while overhead LED illumination highlights evenly your Sofia cooking surface.

To ensure full control of your hood, we have designed this appliance to be controlled with the aid of Professional control knobs. Like jewelry for your home, Sofia's ventilation hoods offer the very best of function and design. Your well ventilated kitchen will thank you for it!





48" CHIMNEY HOOD







LED LIGHTING UNIFORM CONTROLS

To get the best possible view of your culinary creations while you work, illuminate the entire cooking surface with 6 high powered LED lights. When you are finished cooking, Sofia can bask in the lower level lighting, casting your kitchen as the star of your home.

ADJUSTABLE DUAL MOTORS WITH DIRECT INDIVIDUAL MOTOR CONTROL

At the heart of the hood, dual motors are housed separately in sturdy bodies, keeping noise and vibration to a minimum. Quiet enough to be unnoticed even at its maximum 1000 CFM speed, the hood works hard to whisk away heat, smoke, odor and moisture, keeping your kitchen fresh and clean while you entertain your family and friends.



SOFIA PROFESSIONAL SERIES 600 48"

48" PROFESSIONAL HOOD



CODE ID

F6PH48DS1



Filtering



1000 CFM



6 LED lamps



Noise Level 75 (dB)



Wall hung installation

SPECIFICATIONS

HOOD

Scotch brite stainless steel
Heavy Duty Control Panel with Knobs
4 + 4 Speed Mechanical Control
LED lighting
Led 6x1,2 W - 3200 K
Double fan motors
1000 CFM
75 dB sound rating
Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

| OPTIONAL ACCESSORIES | | page |
|----------------------|-----------------|------|
| F6CK48-12 | Chimney cover | 123 |
| FMFIL | Charcoal filter | 123 |
| TECHNICAL DWG | | 246 |
| TECHNICAL DATA | | 290 |



F6PH36S1

1 FAN - SLIDER

Filtering

600 CFM

2 LED lamps

Noise Level 72 (dB)

Wall hung installation

CODE ID

F6PH36DS1

2 FAN - KNOBS



Filtering



1000 CFM 4 LED lamps



Noise Level 75 (dB)



Wall hung installation



SPECIFICATIONS

HOOD F6PH36DS1

Scotch brite stainless steel Heavy Duty Control Panel with Knobs 4 + 4 Speed - Mechanical Control LED lighting: Led 2x1.2 W - 3200 K Dual fan motors 1000 CFM 75 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

HOOD F6PH36S1

Scotch brite stainless steel Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor 600 CFM 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

OPTIONAL ACCESSORIES

F6CK36-12 Chimney cover 123 **FMFIL** Charcoal filter 123 **TECHNICAL DWG** 247 **TECHNICAL DATA** 290

page

HOOD F6PH30S2

SPECIFICATIONS

Scotch brite stainless steel Heavy Duty Control Panel with Knobs 4 Speed - Mechanical Control LED lighting: Led 2x1.2 W - 3200 K One fan motor 600 CFM 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

HOOD F6PH30S1

SOFIA PROFESSIONAL 600 SERIES 30"

30" PROFESSIONAL HOOD

Scotch brite stainless steel Slider controls LED lighting: Led 2x1.2 W - 3200 K One fan motor 600 CFM 72 dB sound rating Baffle filter

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm F6PH30S1

Filtering





600 CFM



Noise Level 72 (dB)

2 LED lamps



Wall hung installation

CODE ID

F6PH30S2

1 FAN - KNOBS



Filtering



4 LED lamps



Noise Level 72 (dB)



Wall hung installation



OPTIONAL ACCESSORIES page F6CK30-12 Chimney cover 123 **FMFIL** Charcoal filter 123 **TECHNICAL DWG** 247

290

TECHNICAL DATA

Filtering

SOFIA PROFESSIONAL CHIMNEY HOOD

48" PROFESSIONAL WALL-MOUNT HOOD



F6PC48DS1

CODE ID

Filtering



1000 CFM





Wall hung installation

Noise Level 75 (dB)



SOFIA PROFESSIONAL CHIMNEY HOOD

36" PROFESSIONAL WALL-MOUNT HOOD

1000 CFM 6 LED lamps Noise Level 75 (dB) Wall hung installation

SPECIFICATIONS

WALL-MOUNT HOOD

Scotch brite stainless steel Heavy-Duty Control Panel with 3 Knobs 3 + 3 Speed Settings LED lighting Led 6x1,2 W - 3200 K Double fan motors 1000 CFM 75 dB sound rating Baffle filter

Minimum distance: - Electric hob 21" - 53 cm

- Gas hob 25" - 63 cm

| OPTIONAL ACCESSORIES | | page |
|----------------------|-----------------|------|
| FMFIL | Charcoal filter | 123 |
| TECHNICAL DWG | | 248 |
| TECHNICAL DATA | | 291 |

SPECIFICATIONS

WALL-MOUNT HOOD

Scotch brite stainless steel Heavy Duty Control Panel with 3 Knobs 3 + 3 Speed Settings LED lighting Led 4x1,2 W - 3200 K Double fan motors 1000 CFM 75 dB sound rating Baffle filter Minimum distance: - Electric hob 20" - 51 cm

- Gas hob 25" - 63 cm

| OPTIONAL ACCESSORIES | | page |
|----------------------|-----------------|------|
| FMFIL | Charcoal filter | 123 |
| TECHNICAL DWG | | 248 |
| TECHNICAL DATA | | 291 |

SOFIA PROFESSIONAL 600 SERIES 36"

36" PROFESSIONAL INSERT HOOD

4 LED lamps



Noise Level 75 (dB)



Ceiling installation

48" PROFESSIONAL INSERT HOOD



F6BP46DS1

Filtering

1000 CFM

6 LED lamps

Ceiling installation

Noise Level 75 (dB)

SPECIFICATIONS

INSERT HOOD

Scotch brite stainless steel Heavy Duty Control Panel with Knobs LED lighting: Led 6x1,2 W - 3200 K 4 + 4 Speed - Mechanical Control Baffle filter Dual fan motors - 1000 CFM

75 dB sound rating Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

Overall dim - width 45-3/4" -116 cm Overall dim - height 13-1/8" - 33 cm Overall dim - depth 18-1/2" - 47 cm Cut out (wxd) 43-7/16" x 16-1/2" Cut out (wxd) 110.3 x 41.9 cm 68 lbs - 31 kg Gross weight 57 lbs - 26 kg Net weight KW rating 540 W 4.70 A Power cord + Plug

OPTIONAL ACCESSORIES FMFIL Charcoal filter 123 **TECHNICAL DWG** 249 **TECHNICAL DATA** 291

SPECIFICATIONS page

INSERT HOOD

Scotch brite stainless steel Heavy Duty Control Panel with Knobs LED lighting: Led 4x1,2 W - 3200 K 4 + 4 Speed - Mechanical Control Baffle filter Dual fan motors - 1000 CFM 75 dB sound rating

Minimum distance:

- Electric hob 20 1/2" - 52 cm - Gas hob 24 3/4" - 63 cm

34-1/4" - 87 cm Overall dim - width Overall dim - height 13-1/8" - 33 cm Overall dim - depth 18-1/2" - 47 cm 32-1/16" x 16-1/2" Cut out 81.4 x 41.9 cm Cut out

Gross weight 60 lbs 27 kg 51 lbs - 23 kg Net weight KW rating 540 W 4.70 A Power cord + Plug

OPTIONAL ACCESSORIES page **FMFIL** Charcoal filter 123 **TECHNICAL DWG** 249 **TECHNICAL DATA** 281

24" DISHWASHER









HANDLE KIT

We designed a professional handle with a style and presence unique to her name, for a design that is elegant and distinctive.

WASH SYSTEM

The wash system automatically adjusts the water volume, pressure, and temperature according to load size, soil levels, and program setting.

FUNCTIONS

Washing programs of your dishwasher are designed to obtain the best cleaning effect, considering the type of the soiling, soiling degree and properties of the dishes to be washed.

24" STAINLESS STEEL BUILT-IN DISHWASHER SHOWN WITH PRO HANDLE KIT

24" DISHWASHER



F6DWT24SS2 F6UHK24DISH



Noise Level 45 (dB)



Steel Tub



Fast Wash Cycle



1/2 Load Cycle



Flexible Rack Loading

NOTE:

The Fulgor Milano badge, included in the Pro Handle Kit, is optional and its position can be decided by the installer or by the customer.

F6DWT24SS2 Dishwasher F6UHK24DISH Pro Handle Kit



| REQUIRED ACCESSORIES | page |
|--|------|
| F6UHK24DISH Sofia Dishwasher Pro Handle Kit | 125 |
| TECHNICAL DWG | 252 |
| TECHNICAL DATA | 295 |

SPECIFICATIONS

DISHWASHER

16 Place Settings

6 Programs

45 dB Silent Operations

Flexible Rack Loading

All-In-One single tablet Detergent Function

Fast Function

5 Level Wash


Flow-Through Heater 3 way Euro Filtering System

Front Adjustable rear feet

Adjustable Hinge System

Built-in High Loop with Air Gap


Double Motion Float System

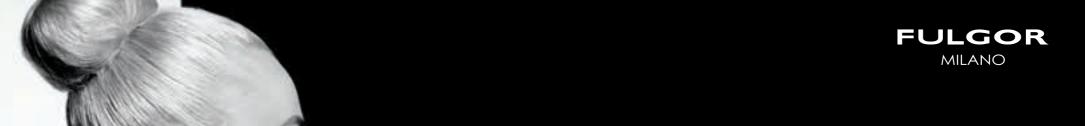

PROFESSIONAL OPTIONAL ACCESSORIES





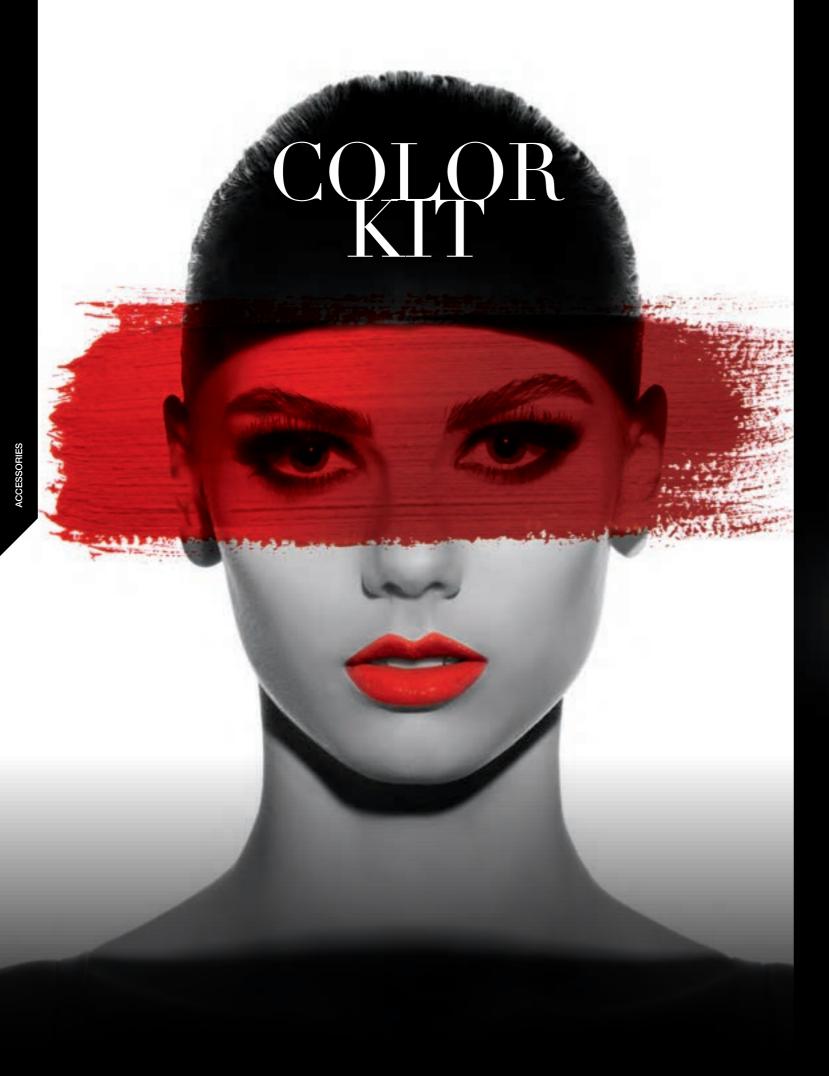

FULGOR MILANO



PERSONALIZE WITH COLOR

Your cooking style is personal and now you can easily personalize your kitchen with color. Dress Sofia in vibrant Venetian Red, snowy Palladio White, glistening Gondola Black, sumptuous Black Velvet, or glistening Rialto Grey. With a Sofia Color Kit, making a change is a breeze, simply replace the door and one piece toe-kick whenever the mood strikes you. Sofia can even change with the seasons to make your kitchen alive with color.

FREEDOM TO CHOOSE COLOR

GONDOLA BLACK PALLADIO WHITE BLACK VELVET VENETIAN RED **RIALTO GREY** CANOVA WHITE MATTE BLACK - RAL 9004 GLOSSY BLACK - RAL 9004 GLOSSY WHITE - RAL 9016 MATTE GREY - RAL 9007 "SLATE" GLOSSY RED - RAL 3003 MATTE WHITE - RAL 9016

CODE PDRKIT48BK

MATTE BLACK - RAL 9004

GLOSSY RED - RAL 3003



GONDOLA BLACK GLOSSY BLACK - RAL 9004

48" PRO RANGE DOOR



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

48" PRO RANGE DOOR CODE PDRKIT48MG



PALLADIO WHITE GLOSSY WHITE - RAL 9016

48" PRO RANGE DOOR CODE PDRKIT48WH



OPTIONAL ACCESSORIES

BLACK VELVET MATTE BLACK - RAL 9004

48" PRO RANGE DOOR CODE PDRKIT48MB



48" PRO RANGE DOOR CODE **PDRKIT48RD**



CANOVA WHITE MATTE WHITE - RAL 9016

48" PRO RANGE DOOR CODE PDRKIT48MW



GONDOLA BLACK GLOSSY BLACK - RAL 9004

36" PRO RANGE DOOR CODE PDRKIT36BK

30" PRO RANGE DOOR CODE PDRKIT30BK



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

36" PRO RANGE DOOR CODE PDRKIT36MG
30" PRO RANGE DOOR CODE PDRKIT30MG



PALLADIO WHITE GLOSSY WHITE - RAL 9016

36" PRO RANGE DOOR CODE PDRKIT36WH
30" PRO RANGE DOOR CODE PDRKIT30WH



36" PRO RANGE DOOR CODE **PDRKIT36MB**30" PRO RANGE DOOR CODE **PDRKIT30MB**

BLACK VELVET

VENETIAN RED



36" PRO RANGE DOOR CODE **PDRKIT36RD**30" PRO RANGE DOOR CODE **PDRKIT30RD**



| CANOVA WHITE | MATTE WHITE - RAL 9016 |
|--------------------|------------------------|
| 36" PRO RANGE DOOR | CODE PDRKIT36MW |
| 30" PRO RANGE DOOR | CODE PDRKIT30MW |

For color kit purchase order, remember to order both color kits for the upper and lower door.

GONDOLA BLACK GLOSSY BLACK - RAL 9004

30" PRO UPPER DOOR CODE **PODKIT30BK**30" PRO RANGE LOWER DOOR CODE **PDRKIT30BK**



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

30" Pro Upper Door CODE **PODKIT30MG**30" Pro Range Lower Door CODE **PDRKIT30MG**



PALLADIO WHITE GLOSSY WHITE - RAL 9016

30" Pro Upper Door CODE **PODKIT30WH**30" Pro Range Lower Door CODE **PDRKIT30WH**



OPTIONAL ACCESSORIES

BLACK VELVET MATTE BLACK - RAL 9004

30" Pro Upper Door CODE **PODKIT30MB**30" Pro Range Lower Door CODE **PDRKIT30MB**



VENETIAN RED

GLOSSY RED - RAL 3003

30" Pro Upper Door CODE **PODKIT30RD**30" Pro Range Lower Door CODE **PDRKIT30RD**



CANOVA WHITE MATTE WHITE - RAL 9016

30" Pro Upper Door CODE **PODKIT30MW**30" Pro Range Lower Door CODE **PDRKIT30MW**



GONDOLA BLACK GLOSSY BLACK - RAL 9004

30" Warming Drawers CODE **PWDKIT30BK**



BLACK VELVET

MATTE BLACK - RAL 9004

30" Warming Drawers

CODE PWDKIT30MB



RIALTO GREY MATTE GREY - RAL 9007 "SLATE"

30" Warming Drawers CODE **PWDKIT30MG**



VENETIAN RED

GLOSSY RED - RAL 3003

30" Warming Drawers CODE **PWDKIT30RD**



PALLADIO WHITE - GLOSSY WHITE - RAL 9016

30" Warming Drawers CODE **PWDKIT30WH**



CANOVA WHITE

MATTE WHITE - RAL 9016

30" Warming Drawers CODE **PWDKIT30MW**

THE BEAUTY **IN COLOR**

Fulgor Milano brings modern technology to the kitchen and is continuously seeking innovative solutions for our customers to allow them to achieve the best cooking experience imaginable. With the kitchen returning to the center of the home, color is an important component of design and can bring unity and haramony into your space.













VENETIAN RED

GLOSSY RED - RAL 3003

36"- 30" ACCENTO RANGES - COLOR DOOR KITS

36" ACCENTO RANGE DOOR CODE ACDKIT36RD CODE ACDKIT30RD 30" ACCENTO RANGE DOOR



CANOVA WHITE

MATTE WHITE - RAL 9016

36" ACCENTO RANGE DOOR CODE ACDKIT36MW



BLACK VELVET

MATTE BLACK - RAL 9004

36" ACCENTO RANGE DOOR CODE ACDKIT36MB 30" ACCENTO RANGE DOOR CODE ACDKIT30MB



30" ACCENTO RANGE DOOR CODE ACDKIT30MW



48" Back Guard - 3" Standard Trim



48" Back Guard - 9" High Back Trim


CODE F6BG48HBT



36" Stainless Steel - 1" High Island Trim 30" Stainless Steel - 1" High Island Trim

PROFESSIONAL GAS

CODE F6BG36ISL CODE F6BG30ISL



48" Black Cast Iron - Low Profile Island Trim 36" Black Cast Iron - Low Profile Island Trim

CODE F6BG48BCI CODE F6BG36BCI



36" Back Guard - 3" Standard Trim


CODE F6BG36STD

CODE F6BG48STD



36" Back Guard - 9" High Back Trim

CODE F6BG36HBT



30" Black Cast Iron - Low Profile Island Trim

CODE F6BG30BCI



30" Back Guard - 3" Standard Trim

CODE F6BG30STD



30" Back Guard - 9" High Back Trim

CODE F6BG30HBT



36" Heavy duty enameled Cast-Iron griddle

CODE FMGRID36

CODE FMWOK



30" Heavy duty enameled Cast-Iron griddle

CODE FMGRID30



36" Back Guard - Ind. Low Profile Island Trim CODE **F6BG36IND**



30" Back Guard - Ind. Low Profile Island Trim CODE **F6BG30IND**



WOK RING

For best results with a wok, use this accessory with high-BTU burner specifically creactiveed for wok cooking.



SIMMER PLATE

CODE FMSIM

The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface



CODE FMTRP36


36" Telescopic rack Telescopic rack for 36" Professional range



CODE FMTRP30 30" Telescopic rack Telescopic rack for 30" Professional range and built-in oven



CODE FMTRP18 18" Telescopic rack Telescopic rack for 18" Oven on 48" Professional range

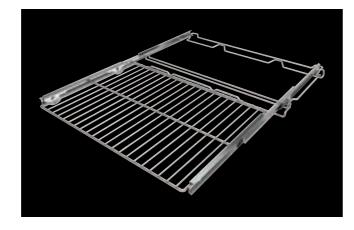

30" Telescopic Oven Rack

CODE FMTR630

PROFESSIONAL INDUCTION

OPTIONAL ACCESSORIES



Trilaminate magnetic plates for non induction pots CODE INDUKIT4



Chimney cover for model F6PH48DS1 - 12" high

CODE F6CK48-12



Chimney cover for model F6PH36S1 and F6PH36DS1 - 12" high

CODE F6CK36-12




Chimney cover for model F6PH30S1 and F6PH30S2 - 12" high

CODE F6CK30-12



Charcoal filters (for recirculating installations)

CODE FMFIL

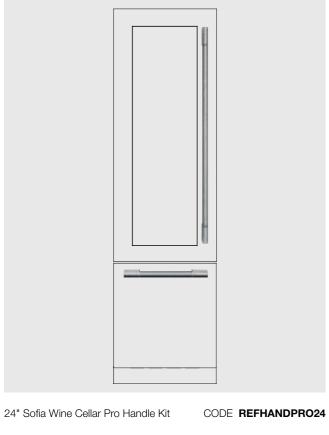




36" Sofia Fridge Pro Handle Kit

CODE REFHANDPRO36


OPTIONAL ACCESSORIES

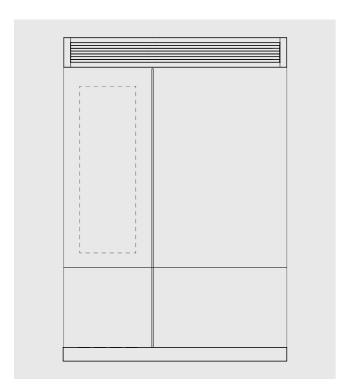

36" Pro Fridge and 24" Pro Wine Cellar Installation Kit; Top Grate, Toe Kick, Vertical Gasket Strip and Insulation Panel.

CODE REFSBSPRO60

Two 36" Pro Fridges Installation Kit; Top Grate, Toe Kick, Vertical CODE REFSBSPR072 Gasket Strip and Insulation Panel.

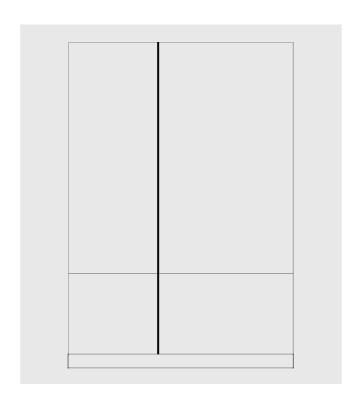

36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.

CODE REFSBSINT60




Professional Pro Handle Kit

CODE F6HK36FFBS

DISHWASHER

OPTIONAL ACCESSORIES

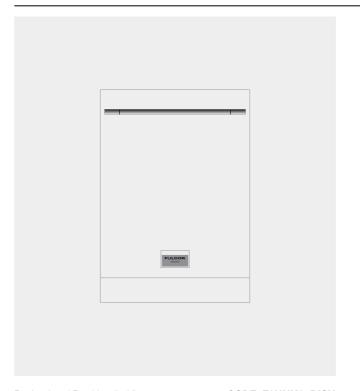

Professional Pro Handle Kit

CODE F6UHK24DISH

DISTINIO LINE



CREATE, IMAGINE, LIVE



DISTINTO-LINE

This powerful line of products that has, in essence, modularity and the linear stroke of its distinctive features. Like a chef who moves with ease and grace in the kitchen, intuitive displays allow simple recall of recipes and specialties.

The functionality of these new ovens equally matches our modern lifestyle, effortlessly allowing us to make the most of our culinary creations. This new standard is the symbol of modernity, created in Italy.





MULTIFUNCTION OVENS



Our Creactive control system combines modern technology with simplicity. The touch screen simplifies all procedures and enhances performance by reducing energy consumption while intensifying cooking modes.

The automatic function control system has safety features providing worry-free operation.

FULGOR MILANO







DISTINTO OVENS **CREACTIVE**

TOUCH CONTROL PANEL

Everything is under your control with just a touch on the Creactive display.

INTUITIVE

It only takes a moment to easily find the desired function.

MULTITASKING

All functions help to get the best results while preparing your recipes.

CUSTOMIZABLE RECIPES

Recipes to suit every palate have been pre-programmed, but you can modify and customize them to your specific requirements.

OUR CREACTIVE CONTROL SYSTEM COMBINES MODERN TECHNOLOGY WITH SIMPLICITY


The CREACTIVE operating system combines technology with ease of use. The touch screen simplifies the programming process of the ovens and enhances performance by reducing energy consumption and increasing cooking functions.


CREACTIVE

ASSISTED COOKING FUNCTION

CONTROL SYSTEM

No more doubts when picking the most suitable cooking function for your meals. Just select the recipe on the display and the oven will automatically initiate the best program. You can modify pre-set recipes to create your own by adjusting cooking times, weights and temperature.














COOKING

MULTI-LEVEL **COOKING MODE**

Internal heat remains constant throughout the oven, while aromas and flavors are kept separate thanks to the fan assisted system.

BROIL

The most effective way to brown the exterior of a steak or roast while locking in juices to retain moisture and tenderness

BAKE

Optimal for perfect baking: flavors blend effortlessly with consistent even heat throughout the oven cavity.

PIZZA MODE 590°F

Simultaneously bake two pizzas in only two and a half minutes with the maximum temperature of 590°F (310°C).

CUSTOMIZABLE RECIPES

Cooking times and modes have been preprogrammed, but you can modify and customize your recipes to suit every palate and need.

SELF-CLEANING

The pyrolytic Self-Clean function, selected directly from the display, consists of heating the inside of the oven to very high temperatures in order to burn off any excess grease and food residue. At the end of the procedure, just wipe the remaining residue ashes with a cloth without the use of chemical detergents.







EXTRA LARGE CAVITY

Imagine the efficiency of being able to use multiple levels of a huge oven at once. We consider it an advantage, don't you?

HALOGEN LIGHTS

The 700 series ovens have 3 20-watt halogen lights that provide plenty of light for easy viewing.

CONCEALED BAKE ELEMENTS

The concealed heating element and large broiler make it possible to cook and save energy at the same time.

SAFETY FEATURE: COOL TOUCH DOOR

Rest assured, your hands are safe with us. Our cool-door technology has a proven guarantee.

PYROLYTIC SELF-CLEAN

Simple, hassle free cleaning. At the end of the self-clean cycle, simply wipe away residue with a damp cloth

TELESCOPIC RACK

Our fully retractable telescopic rack makes accessibility to your cooking more convenient.





FULGOR MILANO

DISTINTO OVEN CREACTIVE 700

SERIES

A modern workhorse that marries style and innovation. With many preset cooking functions, the 700 series ovens help you prepare your meals with efficiency and ease. Child safety locks and cool touch doors ensure you and your family will be protected from high temperatures while cooking and during the self clean cycle. This series offers a versatile self clean mode, a dual convection system for high quality performance and an oversized oven space for big results. With 5 broil levels and a selection of accessories available to you, the 700 series ovens deliver both luxury and convenience.

F7SP30S1

30" TOUCH CONTROL DOUBLE OVEN - STAINLESS STEEL

F7DP30S1

30" TOUCH CONTROL SINGLE OVEN - STAINLESS STEEL





CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



Dual True Convection



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



Meat Probe



Fast Pre-Heat



Interior Lighting



CREACTIVE COOKING SYSTEM




PIZZA COOKING MODE 590 °F



Dual True Convection



Self Clean Oven



1 Telescopic Rack per oven



Cool Touch Door



TFT Display



Meat Probe



Fast Pre-Heat



Interior Lighting

OVEN

Creactive Touch Control System **Dual True Convection**

Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft. 2 chrome racks

1 telescopic rack Enameled Broiler Pan

Lock Keys Door Lock

OVEN FUNCTIONS

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group) Recipes

Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service)

Meat Probe Self-Clean

OPTIONAL ACCESSORIES

FMTR630 233 30" Telesc. Rack

page

TECHNICAL DWG 254 **TECHNICAL DATA** 298 **SPECIFICATIONS**

OVENS Creactive Touch Control System

Dual True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft. 2 chrome racks per oven

1 telescopic rack per oven Enameled Broiler Pan

Lock Keys Door Lock **OVEN FUNCTIONS**

Bake (cooking group)

Broil Convection (cooking group) Keep Warm (cooking group)

Recipes

Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode

Sabbath Mode

Setting Temperature °C/°F Setting Weight Kg/lb

Event Logs (for Service) Meat Probe (only upper oven)

Self-Clean

OPTIONAL ACCESSORIES page FMTR630 233 30" Telesc. Rack **TECHNICAL DWG** 254

TECHNICAL DATA

140 FULGOR MILANO

FULGOR MILANO 141

299

30" TOUCH CONTROL DOUBLE OVEN - BLACK GLASS

30" TOUCH CONTROL SINGLE OVEN - BLACK GLASS

F7SP30B1



CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



Dual True Convection



Self Clean Oven



Multi-level cooking



1 Telescopic Rack



Cool Touch Door



TFT Display



Fast Pre-Heat







CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



Dual True Convection

Multi-level cooking



Self Clean Oven



1 Telescopic Rack per oven



Cool Touch Door



TFT Display



Meat Probe



Fast Pre-Heat



Interior Lighting

OPTIONAL ACCESSORIES

SPECIFICATIONS

OVEN

Creactive Touch Control System **Dual True Convection**

Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft. 2 chrome racks

1 telescopic rack

Enameled Broiler Pan

Lock Keys Door Lock

OVEN FUNCTIONS

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F

Setting Weight Kg/lb Event Logs (for Service)

Meat Probe Self-Clean

OPTIONAL ACCESSORIES

FMTR630 30" Telesc. Rack

page

TECHNICAL DWG TECHNICAL DATA

SPECIFICATIONS

Gross capacity 4.4 cu. ft. 2 chrome racks per oven

1 telescopic rack per oven Enameled Broiler Pan

Lock Keys Door Lock Preheat (display instantaneous temperature)

Fast Preheat Mode

Sabbath Mode

Setting Temperature °C/°F Setting Weight Kg/lb Event Logs (for Service)

Meat Probe (only upper oven) Self-Clean

page

233 **OVENS OVEN FUNCTIONS** FMTR630 30" Telesc. Rack 233 Creactive Touch Control System Bake (cooking group) 254 **TECHNICAL DWG** 254 **Dual True Convection** Broil Self-cleaning oven with Multifunction baking Convection (cooking group) 298 **TECHNICAL DATA** 299 Black Porcelain enamel interior Keep Warm (cooking group) Cool to the touch Recipes Extra-large baking cavity and viewing area Classic Pizza Function 590°F 3 Halogen lights for flawless visibility Preset default temperature

142 FULGOR MILANO

F7SP30W1

30" TOUCH CONTROL DOUBLE OVEN - WHITE GLASS

F7DP30W1

30" TOUCH CONTROL SINGLE OVEN - WHITE GLASS



CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F





Dual True Convection







Cool Touch Door



TFT Display



Meat Probe



Fast Pre-Heat



Interior Lighting



PLANOR

CREACTIVE COOKING SYSTEM



PIZZA COOKING MODE 590 °F



Dual True Convection



Self Clean Oven



Multi-level cooking



1 Telescopic Rack per oven



Cool Touch Door



TFT Display



Meat Probe Fast Pre-Heat



Interior Lighting

SPECIFICATIONS

OVEN

Creactive Touch Control System **Dual True Convection**

Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft. 2 chrome racks

1 telescopic rack

Enameled Broiler Pan

Lock Keys Door Lock

OVEN FUNCTIONS

Bake (cooking group) Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode Sabbath Mode Setting Temperature °C/°F

Setting Weight Kg/lb Event Logs (for Service) Meat Probe

Self-Clean

OPTIONAL ACCESSORIES

FMTR630 233 30" Telesc. Rack

page

TECHNICAL DWG 254 **TECHNICAL DATA** 298

SPECIFICATIONS

OVENS

Creactive Touch Control System **Dual True Convection**

Self-cleaning oven with Multifunction baking Black Porcelain enamel interior

Cool to the touch

Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility

Gross capacity 4.4 cu. ft. 2 chrome racks per oven

1 telescopic rack per oven Enameled Broiler Pan

Lock Keys Door Lock

OVEN FUNCTIONS

Bake (cooking group)

Broil

Convection (cooking group) Keep Warm (cooking group)

Recipes

Classic Pizza Function 590°F

Preset default temperature Preheat (display instantaneous temperature)

Fast Preheat Mode

Sabbath Mode

Setting Temperature °C/°F Setting Weight Kg/lb

Event Logs (for Service) Meat Probe (only upper oven)

Self-Clean

OPTIONAL ACCESSORIES

FMTR630

TECHNICAL DWG 254 **TECHNICAL DATA** 299

30" Telesc. Rack

FULGOR MILANO 145

144 FULGOR MILANO



page

233



MILANO

SPEED OVEN

A premium kitchen is not complete without a combi speed oven. Microwave, bake, broil, or use any of the combination cook modes to enjoy the benefits of speed cooking. Enjoy all the benefits of our combi speed steam oven without compromising the look of your Distinto built-in appliances.






COOKING

10:22 ⊲ ⊗ ⊳



Microwave Cooking





30" COMBI SPEED OVEN

-


F7DSPD30S1

Microwave Cooking

Thawing



True Convection





Multi-level cooking

SPECIFICATIONS

OVEN 3 in 1 Oven: Microwave, Convection, and Combi Stainless Interior with broiler Quick Access Menu Dual Keyboard Automatic Programs 240 Volt Connection

PERFORMANCE

10 Combined Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Microwave mode (6 levels) Fan assisted mode Combined Cooking mode Microwave and Grill mode Defrosting by time and weight

page

TECHNICAL DWG 256 **TECHNICAL DATA** 300 **SPECIFICATIONS**

OVEN

3 in 1 Oven: Microwave, Convection, and Combi Stainless Interior with broiler Quick Access Menu Single Keyboard Automatic Programs

240 Volt Connection

PERFORMANCE

10 Combined Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Microwave mode (6 levels) Fan assisted mode Combined Cooking mode Microwave and Grill mode Defrosting by time and weight

TECHNICAL DWG TECHNICAL DATA

148 FULGOR MILANO

FULGOR MILANO 149

COOKING

page

256

300

True Convection



Automatic Cooking



Meat Probe



Multi-level cooking

Cool Touch Door

OVEN 700 SERIES 30"

30" COMBI STEAM OVEN

NEW

FULGOR MILANO

30"

STEAM OVEN

Have you considered the benefits of cooking with steam?

compromising the look of your Distinto built-in appliances.

Steam, bake, broil, or use one of the combination cooking modes and achieve be-

autiful and healthy results. Enjoy all the benefits of our combi steam oven without

SPECIFICATIONS

FEATURES

3 in 1 Oven: Steam, Convection, and Combi-steam Stainless Interior with broiler

Quick Access Menu Automatic Programs Meat Probe

240 Volt Connection

Steam Generator

PERFORMANCE

12 Functions Automatic Cooking Pre-selected and customizable recipes (weight, temperature, cooking time) Steam System Combined Cooking Functions Steam Recovery Cycle CLEAN, assisted cleaning cycle for oven interior and steam circuit

TECHNICAL DWG TECHNICAL DATA page

256

301

150 FULGOR MILANO FULGOR MILANO 151

24" COMBI STEAM OVEN

24"

DISTINTO

COMPACT COLUMN

Limited on space but not interested in compromising your cooking experience? The Distinto Compact Column can be created by combining three exclusive cooking units in a single compact wall oven cabinet.



COMBI STEAM OVEN

Our new Fulgor Milano 1.3 cu ft builtin Combi Steam oven gives you a healthy alternative for cooking your favorite foods. This oven can also be used as a steam cooker, a full function oven or a combination of steam and convection heat are used together to provide perfect results.



CONVECTION OVEN

The new 24" Distinto Full Function convection oven is bigger than you think and features our easy to use and intuitive touch controls and is a perfect compliment to the other 24" Distinto built-in cooking products.

WARMING DRAWER

The Distinto compact warming drawer is a perfect complement to any kitchen and integrates seamlessly.

Steam Cooking



Steam Limescale Filter



Fingerprint-proof Stainless Steel



Automatic Cleaning Programs



Meat Probe



Stainless Steel Racks



Multi-level Cooking



TECHNICAL DWG

TECHNICAL DATA

True Convection

SPECIFICATIONS

OVEN 12 functions

Automatic cooking with pre-selected recipes which can be customizable (weight, temperature, cooking time) Steam system Combined cooking functions

Steam recovery cycle CLEAN, assisted cleaning cycle for oven interior

and steam circuit

SAFETY

Safety door - Door contact switch Control panel safety function Tangential cooling fan

FEATURES

Control panel with touch controls

Magnetic water filter Stainless steel interior Internal lighting

Internal capacity 1.2 cu.ft Steam Generator

INCLUDED ACCESSORIES

Meat probe

1 micro-perforated pan with stainless steel cover

1 stainless steel tray

1 flat rack

Water tank Power cord with plug 24" MULTIFUNCTION SELF-CLEANING OVEN

10:22

CODE ID

24" WARMING DRAWER







Thawing

WARMING DRAWER 24"

F7SP24S1



CREACTIVE COOKING SYSTEM



True Convection



Multi-level cooking



Automatic Cooking



Self-Cleaning Oven



Nickel-free Enamel

SPECIFICATIONS

OVEN

15 cooking modes Automatic cooking with preselected and customizable recipes (weight, temperature, cooking time) Sabbath Mode BOOST to rapidly reach the pre-selected

SAFETY

temperature

PYROLYSIS Self-cleaning

Cool door with 4-pane glass 2-speed tangential cooling ventilation Keypad and door safety lock function Smoke catalyst

FEATURES

Control panel with touch controls Dual convection fan Black Porcelain enameled interior Internal lighting Internal capacity 2.6 cu.ft.

INCLUDED ACCESSORIES

1 wide enameled tray with anti-splash insert 2 flat grill racks Power cable

FMTELG 24" Telesc. Guides 233 **TECHNICAL DWG** 257 **TECHNICAL DATA** 302

page

OPTIONAL ACCESSORIES

SPECIFICATIONS

WARMING DRAWER Knob Control Full extendable telescopic rails Capacity 0,5 cu. ft. Fan Assisted Heating System All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door Non-slip rubber mat Internal Lighting

DRAWER 24" FUNCTIONS

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F **TECHNICAL DWG TECHNICAL DATA** page



FULGOR MILANO

DISTINTO OVEN 400

SERIES

A sleek European design and flush installation, the 400 series oven shares the same body and soul of the 700 series oven, offering many of the same professional features while providing tremendous value. Available only in a single oven configuration, this series offers an oversized oven capacity, multi pass broil, European convection, concealed bake elements and 8 baking functions; all of which are controlled by an easy to use and extremely reliable control system.

The Athena XS control gives the home chef complete control via easy to use and intuitive controls making this oven a great choice as a primary or secondary oven for a variety of kitchen designs and applications.

COOKING

OVEN 400 SERIES 30"

OVEN 400 SERIES 30"

0835

FULCOR

CODE ID

F4SP30S3



True Convection



Self Clean Oven



Cool Touch Door



Interior Lighting



Digital Controls



SPECIFICATIONS

OVEN

Knob and electronic controls Single fan true convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior Cool to the touch Extra-large baking cavity and viewing area 3 Halogen lights for flawless visibility Gross capacity 4.4 cu. ft. 2 chrome racks Enameled Broiler Pan

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode

| OPTIONAL ACCESSORIES | | page |
|----------------------|------------------|------|
| FMTR630 | 30" Telesc. Rack | 233 |
| TECHNICAL I | DWG | 254 |
| TECHNICAL DATA | | 304 |

158 FULGOR MILANO

COOKING

30" WARMING DRAWER OVERLAY PANEL

30" WARMING DRAWER STAINLESS STEEL DOOR



F7DWD30S1



Sliding Telescopic Rails



Keep Warm Function



Leavening



Slow Cooking



Thawing



Push Opening



F7IWD3001



Sliding Telescopic Rails



Keep Warm Function



Leavening



Slow Cooking



Thawing



Push Opening





WARMING DRAWER

Non-slip rubber mat

Knob Control Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for a more heating distribution All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F Push-Pull system to open and close door 2 Internal lights

DRAWER 30" FUNCTIONS

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F page

TECHNICAL DWG 254 **TECHNICAL DATA** 305 **SPECIFICATIONS**

WARMING DRAWER Knob Control Installation with Overlay Panel Heavy Duty full extendable telescopic rails Large capacity 2,1 cu. ft. Convection heating system for a more heating distribution

All stainless steel structure Warming Temperature range; min. 86 °F up to 190 °F

Push-Pull system to open and close door

2 Internal lights

Non-slip rubber mat

DRAWER 30" FUNCTIONS

Pre-heat dishes Pre-heat coffee cups Keep warm ready food Defrosting Leavening dough Slow cooking min. 86 °F up to 190 °F **TECHNICAL DWG TECHNICAL DATA**

255 305

page

COOKING

160 FULGOR MILANO FULGOR MILANO 161





DISTINTO OVEN 100

SERIES

A standard-setting series with first-class performance. Many preset cooking functions help you prepare your meals with efficiency and ease. The fastest and most versatile self-clean mode available, featuring an automatic door-latch system.

Child safety locks and cool-touch doors protect you and your family from high temperatures while cooking and during the self-clean cycle. Compact oven cavity dimensions fit in any kitchen and reduce energy consumption while providing ample space for all your cooking needs. A selection of accessories is available for your convenience.





True Convection



Self Clean Oven



Multi-level cooking



Cool Touch Door



Interior Lighting



Digital Controls

OVEN

Knob and electronic controls True Convection Self-cleaning oven with Multifunction baking Black Porcelain enamel interior 2 Halogen lights Gross capacity 3.0 cu. ft.

Enameled Broiler Pan (basin + anti splash)

OVEN FUNCTIONS

Bake Broil Roast Convection True Convection Dehydrate Electronic cooking programmer Self-Clean Sabbath Mode

OPTIONAL ACCESSORIES

FMTR 130

TECHNICAL DWG 255 **TECHNICAL DATA** 306

page

Telescopic rack 233



COOKING

2 chrome racks

24" MULTIFUNCTION EASY-CLEAN OVEN

F1SM24S2



FULGOR

F1SM30S3



Convection



Multi-level cooking

Cool Touch Door



Interior Lighting



Convection



Multi-level cooking



Cool Touch Door



Interior Lighting

SPECIFICATIONS

Enameled Grill basin

OVEN Knob and electronic controls Black Porcelain enamel interior 2 Halogen lights Gross capacity 3.0 cu. ft. 2 chrome racks

OVEN FUNCTIONS

| Convection Bake |
|------------------|
| Convection Broil |
| Convection Roast |
| Bake |
| Broil |
| Lower Conv. Bake |

OPTIONAL ACCESSORIES

| FMTR 130 | Telescopic rack | 233 |
|----------------|-----------------|-----|
| TECHNICAL DWG | | 255 |
| TECHNICAL DATA | | 307 |

page

SPECIFICATIONS

OVEN

| Knob and electronic controls |
|---------------------------------|
| True Convection |
| Black Porcelain enamel interior |
| 1 Halogen light |
| Gross capacity 2.6 cu. ft. |
| 2 chrome racks |
| Enameled Broiler Pan |
| |

| OVEN FUNCTIONS |
|------------------|
| Convection Bake |
| Convection Broil |
| Convection Roast |
| Bake |
| Broil |
| Lower Conv. Bake |

| OPTIONAL ACCESSORIES | | pag |
|----------------------|-------------------|-----|
| FMTELG | Telescopic guides | 23 |
| TECHNICAL DWG | | 25 |
| TECHNICAL DATA | | 30 |

COOKING

166 FULGOR MILANO FULGOR MILANO 167

FULGOR MILANO

DISTINTO

MICROWAVES

The Fulgor Milano microwaves, with their stainless steel aesthetics, are the perfect choice for a modern style kitchen and they spouse perfectly with our other appliances. Every aspect of these products is designed to reflect the elegance and uniqueness of the Italian style.



24" DRAWER

elegant surface and hidden controls. The 1.2 cu. ft. drawer is tall enough for 4 qt. casserole dish. The drawer may be installed in an island or below a wall oven in a flush install without impacting the built-in venting.



24" COUNTER-TOP

This built-in drawer microwave has an Complete your Fulgor Milano appliance package with our cost effective and versatile built-in an average 20 oz mug cup and up to a microwave and 30" trim kit. The 2 cubic-feet capacity microwave features 10 power levels, multiple cooking modes, timer and sensors for reheating and defrosting.



30" OVER THE RANGE

Our 30", 1.8 cubic-feet capacity over the range microwave features a contemporary "no handle" design which allows this unit to be used in combination with either our Distinto line or Professional styled products. Three-speed ventilation provides up to 450 CFM of extraction.

DISTINTO MICROWAVE OVEN 24"

24" DRAWER MICROWAVE



CODE ID

F7DMW24S2



Sensor Cooking



Power Selection



Touch Controls



Presets



950 Watts



Auto Defrost



Child Safety Lock

SPECIFICATIONS

FEATURES

Flexible installation Stainless steel design Incandescent interior light Touch control Built-in airflow control for flush mounting transparent door glass Accessible height allows you to easily lift hot foods

page

TECHNICAL DWG 258 **TECHNICAL DATA** 308

168 FULGOR MILANO FULGOR MILANO 169

30" OVER-THE-RANGE MICROWAVE

F40TR30S1

24" COUNTER-TOP MICROWAVE



F4MW024S1

Sensor Cooking



Power Selection



Touch Controls



Presets



1100 Watts

Auto Defrost



Child Safety Lock



Sensor Cooking



Power Selection

Touch Controls



Presets



1100 Watts



Auto Defrost



Child Safety Lock

NOTE

F4TK30MW0 Trim Kit - for a built-in installation, 30" trim kit may be purchased separately

page

TECHNICAL DWG 258 **TECHNICAL DATA** 309 **SPECIFICATIONS**

FEATURES 10 Power Levels White LED Display & Digital Clock 99-Minutes, 99-Second Digital Timer LED lighting Recessed Cavity Type Child-Safe Lock-Out Feature Display On/Off (controlled via Clock key) Removable Glass Turntable for complete, even cooking

VENTILATION

Ventilation Fan Speed: Turbo/High/Low/Off (Max. 450 CFM) Ventilation type available: Front/Top/Rear 1 Charcoal Filter / 2 Air Filters

MICROWAVE FUNCTIONS

TECHNICAL DWG

TECHNICAL DATA

4 Sensor Cook Menu (Frozen Entrée, Frozen Vegetable, Reheat, Potato) 2 Programmed Cook (Beverage, Popcorn) 4 Soften/Melt Menu (Butter, Chocolate, Icecream, Cheese) 6 Convenience Features (Turntable On-Off, Clock, Keep Warm, Time Cook, Power

Level, Defrost (Time/Weight)) Express Cook (1~6 minutes) Kitchen timer (plus Sound On/Off for

3-sec holding)

170 FULGOR MILANO

SPECIFICATIONS

FEATURES

Family Size

11 Power Levels

Super Defrost

Auto Start

Child Lock

Extra Minute 4 Program Stages

Sensor Cook Menu

No Handle - Push Button Open

Electronic Touch Control

Audible Signal Elimination

FULGOR MILANO 171

page

258

309

FULGOR

MILANO



DISTINTO COFFEE MACHINE


Our built-in coffee machine is your personal barista: from storing coffee beans to grinding fresh beans for brewing, to automatically storing puck-grounds into the waste tray.

Enjoy barista-style coffee, from espresso to cappuccino, and your favorite Americano at the touch of a button right at home. This easy to use made in Italy quality unit it the perfect complement to your Fulgor Milano Italian cooking products.

30" BUILT-IN COFFEE MACHINE

F7DTK30BC

LED Lighting





Whole Beans and Ground Coffee



Automatic Coffee Grinder

DISTINTO

30" - 24"

COFFEE MACHINE



30" BUILT - IN COFFEE MACHINE

30" Distinto style Frame kit is available. This unique frame kit allows our unit to be installed in combination with our other 30" built-in Distinto products.



24" BUILT - IN COFFEE MACHINE

Shown in the above image is our unique low profile

This accessory allows our built-in coffee machine to be installed over our other Distinto built-in products, for a seamless look.



24" BLACK GLASS

Our coffee machine is also available in a black glass finish. The 24" Distinto built-in coffee machine allows for a smaller footprint when installed on its own.

NOTE

SPECIFICATIONS

Coffee / 2 x Coffee

Espresso / 2 x Espresso

Programmable Temperature

Automatic cleaning cycle

Stand-by (energy saving)

Water heating Time 3 minutes

FEATURES

White coffee

Milk froth

Warm milk

Latte macchiato

Both codes are required and sold separately. F7BC24B1 Coffee Machine F7DTK30BC Frame Kit

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light

5 mug size settings: espresso, corto, medium, large, pot Cappuccino

Steam and Hot water Stand-by (energy saving) SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

TECHNICAL DWG

TECHNICAL DATA

174 FULGOR MILANO

FULGOR MILANO 175

page

259

311

CODE ID

24" BUILT-IN COFFEE MACHINE BLACK GLASS

DISTINTO COFFEE MACHINE

FLADOR

F7BC24S1

LED Lighting



Cappuccino Maker



Programmable Temperature



Whole Beans and Ground Coffee



Automatic Coffee Grinder



LED Lighting



Cappuccino Maker



Programmable Temperature



Whole Beans and Ground Coffee



Automatic Coffee Grinder

TECHNICAL DWG 259 312

page

TECHNICAL DATA

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)

SAFETY

TECHNICAL DWG

TECHNICAL DATA

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

SPECIFICATIONS

FEATURES

Espresso / 2 x Espresso Coffee / 2 x Coffee White coffee Latte macchiato Milk froth Warm milk Programmable Temperature Water heating Time 3 minutes Automatic cleaning cycle Stand-by (energy saving)

FUNCTIONS

3 different coffee temperature settings 5 coffee strength settings: extra-strong, strong, medium, light, extra-light 5 mug size settings: espresso, corto, medium, large, pot Cappuccino Steam and Hot water Stand-by (energy saving)

SAFETY

Water hardness setting Coffee and water refill indicators Ground coffee container to empty indicator Cleaning indicator Limescale filter indicator

INCLUDED ACCESSORIES

Cappuccino Maker Container for the milk Telescopic rails Power cord with plug

176 FULGOR MILANO

FULGOR MILANO 177

page

259

313





With sleek lines, a continuous surface grate over powerful aluminum burners, this cooktop combines elegant design, responsive performance, and thoughtful convenience. Distinto cooktop enters a new realm with its low profile allowing design flexibility for your kitchen. Enjoy the power of a 20,000 BTUs Dual Aluminum Burner of this cooktop while using the additional 4 Dual Stack Burners, designed to surpass all of your expectations. Continuous cast iron grates offer an even cooking surface for easy movement of pans from burner to burner so that even your biggest cooking events can be handled with ease.

178 FULGOR MILANO FULGOR MILANO 179

30" DISTINTO GAS COOKTOP

36" DISTINTO GAS COOKTOP

F4PGK365S1



Aluminum Burners



1 Central Dual Burner




Heavy Duty Grates



Heavy Duty Control Panel

Continuous Grate Surface

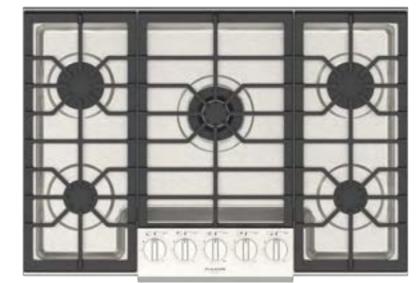

Aluminum Burners



1 Central Dual Burner



Heavy Duty Grates Continuous Grate Surface



Heavy Duty Control Panel





SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl

1 Aluminum Dual Flame Burner with 20.000 BTU Max (NG)

2 Aluminum Stacked Burners with 15.000 BTU Max (NG)

1 Aluminum Rapid Burner with 12.000 BTU Max (NG)

1 Aluminum Burner with 8.000 BTU Max (NG)

Heavy duty control panel Large cooking area Full pot stability

Natural Gas (LP Convertible)



| OPTIONAL ACCESSORIES | | page |
|----------------------|--------------------------|------------|
| FMWOK FMSIM | Wok ring Simmer plate | 232 232 |
| TECHNICAL DWG | | 260 |

314

TECHNICAL DATA

SPECIFICATIONS

COOKING SURFACE

3 Heavy duty continuous cast iron grates Heavy Gauge 304 Stainless Steel Burner Bowl

1 Aluminum Dual Flame Burner with 20.000 BTU Max (NG)

2 Aluminum Rapid Burners with 10.500 BTU Max (NG)

2 Aluminum Semi-rapid Burners with 8.000 BTU Max (NG)

Heavy duty control panel Large cooking area

Full pot stability

Natural Gas (LP Convertible)

FMWOK Wok ring 232 **FMSIM** Simmer plate 232

OPTIONAL ACCESSORIES

NOTE:

Wok ring (FMWOK) to be used with centre burner only.

TECHNICAL DWG 260 **TECHNICAL DATA** 315

COOKING

180 FULGOR MILANO

page



DISTINTO COCKTOPS 400

SERIES

The 400 series "Largo" cooktops utilize the most advanced technology available and combine this with a classic Italian design, resulting in a cooktop that not only performs magnificently but also looks spectacular. A design that lends itself to countless application possibilities, the 400 series cooktops also take cooking and maintenance needs into consideration.

All grates are separated in sizes that make them easy to handle and remove for cleaning. The burners are well oriented for ease of use, with unique configurations like a wok burner and fifth burner on a 30" unit, making this cook top one of the most versatile in the category. Explore the Largo cooktop family and enjoy the possibilities; buon appetito!

DISTINTO

GAS COOKTOPS 400 SERIES









CONTINUOUS GRATE SURFACE

Move from one burner to the next with ease and safety.

DUAL BURNER

Fulgor-Milano uses a dual-flame European-style sealed burner to deliver a wide range of heat.

SPACE FOR WOK

Our unique configurations allow you to have all the space needed for large pans or even a wok.

EUROPEAN SEALED BURNERS

Designed with only two removable parts, our sealed burners keep spills from leaking inside the cooktop.

High quality aluminum.

COOKING

F4GK42S1

36" GAS COOKTOP

44" GAS COOKTOP





Heavy Duty Grates



Dual Burner



Stainless Steel

7 Heavy Duty Grates



Dual Burner



Stainless Steel

4 gas burners with 1 Dual Flame burner Electronic Ignition and Re-ignition Flame-out Sensing Heavy duty cast iron grates
 OPTIONAL ACCESSORIES
 page

 FMWOK
 Wok ring
 232

FMSIM

FMSPR Small Pot Adapter 232

Simmer plate

232

TECHNICAL DWG 261
TECHNICAL DATA 316

SPECIFICATIONS

GAS COOKTOP

5 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates OPTIONAL ACCESSORIES

FMWOKWok ring232FMSIMSimmer plate232FMSPRSmall Pot Adapter232

page

COOKING

TECHNICAL DWG 261
TECHNICAL DATA 316

24" GAS COOKTOP

30" GAS COOKTOP



F4GK30S1

Heavy Duty Grates



Continuous Grate Surface



Dual Burner



Stainless Steel



Heavy Duty Grates



Continuous Grate Surface



Dual Burner



Stainless Steel

GAS COOKTOP

5 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates

OPTIONAL ACCESSORIES FMWOK Wok Ring 232

FMSIM

FMSPR 232 Small Pot Adapter

Simmer Plate

page

232

TECHNICAL DWG 262 317 **TECHNICAL DATA**

SPECIFICATIONS

GAS COOKTOP

4 gas burners with 1 Dual Flame burner Electric Re-ignition system Flame-out Sensing Heavy duty cast iron grates

OPTIONAL ACCESSORIES

FMWOK Wok Ring 232 **FMSIM** Simmer Plate 232 **FMSPR** Small Pot Adapter 232

TECHNICAL DWG 262 TECHNICAL DATA 317

188 FULGOR MILANO

page



FULGOR MILANO

DISTINTO INDUCTION COCKTOPS 700 SERIES

Our 700 series induction cooktops follow the same design criteria of all our Fulgor-Milano products; style, function, and performance are at the heart of this product. Like our radiant touch cooktops, the induction units are finished with a subtle yet elegant aluminum trim that exudes luxury while offering all of the features you expect from a premium cooking appliance. Our induction cooktops offer the power and control of a gas cooktop with the cleanability of a radiant cooktop, giving you the best of both worlds. From tempering fine chocolate, braising a classic Ossobuco, or bringing a 15 quart stock pot to boil in minutes, the possibilities are endless with our induction technology.

INDUCTION COOKTOPS 700 SERIES





EXTRA LARGE ZONE AND BRIDGE ELEMENT

Maximum flexibility in how you use the cooktop.

SLIDE TOUCH CONTROLS

Each cooking zone has its own slide touch control for precise selection of power.

INDUCTION

The pan creating its own heat means cooking safely without compromise. Since there is no heat transfer from a conventional burner through the glass, induction cooking surfaces use the exact amount of energy needed - no more, no less!

FRAME


Aluminum frame stainless steel color: Sophisticated and functional! Adds a touch of elegance while protecting the glass edge.

LOW TEMPERATURE FUNCTION

Low enough to temper chocolate or hold delicate sauces without using a double boiler.

30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM

36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM





F7IT36S1

Easy Clean Ceramic Glass

Slide Touch Control

Bridge Zone

Pan Detection system

Residual Heat Sensor

Frame Creactive

Digital Minute Minder



Easy Clean Ceramic Glass



Slide Touch Control



Pan Detection system



Residual Heat Sensor



Frame Creactive



Digital Minute Minder

INDUCTION COOKTOP

5 Induction cooking zones 11" large cooking zone Bridge zone on the right side Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Melt and Simmering Functions Residual heat and Power on Indicators Digital Minute Minder

Pot Detection System Child Lock Function Independent timer for each zone Pause Function Booster function for each cooking zone Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time

OPTIONAL ACCESSORIES page Pot Induction Adapter INDUKIT4 234

TECHNICAL DWG

TECHNICAL DATA

SPECIFICATIONS

INDUCTION COOKTOP

4 Induction cooking zones 11" cooking zone Elegant Ceramic glass surface Premium induction technology for unsurpassed performance Melt and Simmering Functions Residual heat and Power on Indicators Digital Minute Minder

Pot Detection System Child Lock Function Independent timer for each zone. Pause Function Booster function for each cooking zone Failure Codes Indication Digital Display for Power Level Automatic Heat-up Time


| OPTIONAL ACCESSORIES | | page |
|----------------------|-----------------------|------|
| INDUKIT4 | Pot Induction Adapter | 234 |
| TECHNICAL DWG | | 263 |
| TECHNICAL DATA | | 319 |


COOKING

194 FULGOR MILANO FULGOR MILANO 195

263

318

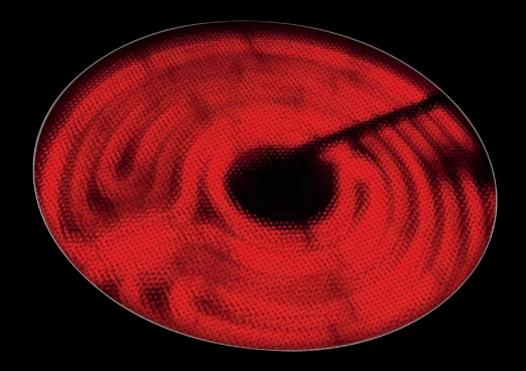

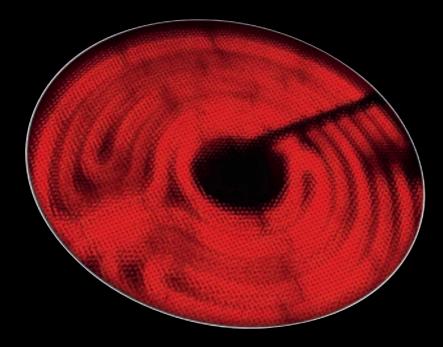

FULGOR MILANO

RADIANT COKTOPS 600 SERIES

Beautiful intuitive controls designed with elegance and precision. Radiant touch cooktops deliver quick and reliable performance with maximum flexibility. Touch controls with patented Peacock control sliding bar for power-level selection and fast boil with automatic power reduction.

RADIANT COOKTOPS 600 series





ELECTRONIC CONTROL

COOKING

Fine-tuning of lower temperatures plus timer function is standard with our slide touch control bar and "Peacock" power display.

FRAME

Polished aluminum frame: Sophisticated and functional!

36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

F6RT36S2



Easy Clean Ceramic Glass

-

Peacock Touch Control



Bridge Zone



Triple Radiant



Residual Heat Sensor



Frame Creactive



30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM

Easy Clean Ceramic Glass



Peacock Touch Control



Double Radiant



Triple Radiant



) Timer



Residual Heat Sensor



Frame Creactive

RADIANT COOKTOP

Digital Display for Power Level
Low Power Scale for Delicate Cooking
Control Display Lock
Automatic Fast Boil Function
Power and Hot surface Indication
Timer Functions
Timer Display
Acoustic Buzzer
Independent timer for each zone
Booster function for each cooking zone

page

264

320

TECHNICAL DWG
TECHNICAL DATA

SPECIFICATIONS

RADIANT COOKTOP

Digital Display for Power Level
Low Power Scale for Delicate Cooking
Control Display Lock
Automatic Fast Boil Function
Power and Hot surface Indication
Timer Functions
Timer Display
Acoustic Buzzer

Independent timer for each zone.

Booster function for each cooking zone

Failure Codes Indication

IS page

TECHNICAL DWG 264
TECHNICAL DATA 321

COOKING

Failure Codes Indication

page

DISTINTO

RADIATOPS COCKETOPS

SERIES

Our 300 series cooktops offer the same elegant European design and family line as our radiant touch and induction cooktops but in a package that offers great value and performance to the consumer. The manual controls are reliable and accurate and continue to be the most user friendly of all control systems available today. Even the most discerning cooks will be impressed with the functionality and performance of this mainstay. Like all Fulgor-Milano cooktops the 300 series offers a shallow profile for countless installation options.



RADIANT COOKTOPS 300 SERIES 24"

24" RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM

CODE ID F3RK24S2



Easy Clean Ceramic Glass



Double Radiant



Residual Heat Sensor



Frame Creactive





SPECIFICATIONS

RADIANT COOKTOP

Power on Indication

Hot surface Indication

TECHNICAL DWG 264
TECHNICAL DATA 322

FULGOR MILANO 205



DISTINTO REFRIGERATION &WINE

COLD TEMP. UNDER CONTROL.

The refrigeration system was developed to be optimized for complete integration and designed to offer maximum storage capacity. The dual-movement hinges ensure that all the fridge drawers extend fully when open. The interior is a brilliant white, for striking effect.

Fulgor Milano Wine Cellars store wine under ideal conditions, designed to eliminate the four enemies of wine: heat, humidity, light, and vibration. With all of the functional and aesthetic features of our refrigerators, significant attention was paid to the added features of customized humidity and temperature control, ensuring the optimal environment for aging your wine collection.

DISTINTO

REFRIGERATION & WINE


DUOPRO

Dual variable speed compressors and two dedicated evaporators ensure smooth, quite, energy efficient operation.

SOFT-CLOSING SYSTEM

State-of-the-art mechanisms ensure the slow and silent closing of drawers and doors every time.













INTERIOR CONVENIENCE

Brilliant white aluminum interior walls combine with a powerful LED lighting system to create a striking effect and a bright interior. With a state of the art adjustable glass shelving system and door bins, convenience is key while the advanced refrigeration system keeps your food fresher longer.

OPTIVISION

The Optivision lighting system uses modern LED technology to ensure an optimal view of the interior. Ten LED arrays light the refrigerator compartment from above, while 7 individual spot lights illuminate distinct areas of the fridge and fresh food compartments and Flexzone drawer.

CUSTOM SIZED ICE

With the Ice Maker menu you can choose the size of the ice cubes produced automatically between large and medium.

WINE CELLAR

The electronic control enables the preferred humidity level to be chosen, between high, medium and low, ensuring the correct preservation of corks, a fundamental element for the storage of fine wine. Not just tasting temperature: the Cave storage compartment can also be used to store red wines to be aged over a long period thanks to the accurate temperature and humidity control.

36" DISTINTO BUILT-IN FRIDGE



Cool Zone 0°C



Deep-freezing Hot air ventilation



Total No Frost



Rapid Deep Freezing



Noise Level 41 (dB)



Integrated Installation



Holiday Mode



Ice Maker



OPTIONAL ACCESSORIES page


REFHANDIS36 235 Distinto Fridge Handle Kit REFSBSINT60 235 Coupling kit

TECHNICAL DWG TECHNICAL DATA

NOTE:

Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer

24" DISTINTO BUILT-IN WINE CELLAR

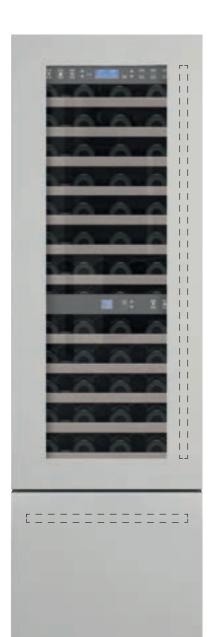

F7IBW2401-R (RIGHT HINGE) CODE ID

F7IBW24O1-L (LEFT HINGE)



RIGHT HINGE



LEFT HINGE



Deep-freezing



Hot air ventilation



Rapid Deep Freezing



LED lighting



Noise Level 41 (dB)



Integrated Installation



Holiday Mode



Triple Pane Glass



54 Bottles Capacity



SPECIFICATIONS

REFRIGERATION

WINE CELLAR

Overlay Panel Cave Storage Compartment, Natural Wood Shelves, for 36 bottles Wine Celler Compartment, Natural Wood Shelves, for 18 bottles TriplePlay Refrigeration Total No Frost LED Lighting Brilliant white aluminium interior Flexzone Bottom Drawer

OPTIONAL ACCESSORIES

REFHANDIS24 235 Distinto Wine Cellar Handle Kit REFSBSINT60 235 Coupling kit **TECHNICAL DWG** 267 **TECHNICAL DATA** 326

page

NOTE:

Handle kit: Distinto Fridge and Wine Cellar handles are to be supplied by installer

SPECIFICATIONS

FRIDGE

1.1

LJ

Overlay Panel Fridge Compartment Flexzone Bottom Drawer Total No Frost Stainless Steel Drawers Ice Maker with ice tray LED Lighting Brilliant white aluminium interior

208 FULGOR MILANO

267

325

FRIGERATIO

36" FRENCH DOOR FRIDGE

36" FRENCH DOOR FRIDGE SHOWN WITH DISTINTO HANDLE KIT

36" FRENCHDOOR REFRIGERATOR

The Fulgor Milano freestanding counter depth French-door unit opens wide to reveal features like an internal water dispenser, adjustable fresh zone drawer, tri-level slide-out freezer baskets and self-closing freezer drawer.



DISTINTO HANDLE KIT

Once the Distinto Handle Kit is installed, our counter-depth french door fridge is a perfect complement to any of our Distinto ranges or Distinto built-in cooking appliances.

COUNTER-DEPTH STYLE

Limited on space and can't fit a full height built-in fridge, or simply want to have the look without blowing the budget? The new Fulgor Milano counter-depth fridge allows you to achieve a beautiful look without compromise.



SPECIFICATIONS

FRIDGE

Duo Cycling Cooling
Ion Fresh
Inner Digital Display
Sabbath Mode
Large Pantry Drawer
Height Adjustable Cantilever Shelves
Interior Filtered Water Dispenser
Interior Theatre Lighting with LED lights

FREEZER FEATURES

Automatic Ice Machine Large Freezer Drawer

F6FBM36S2 F7HK36FFBS

CODE ID



Fingerprint-Proof Stainless Steel



D ION Fresh



LED Lighting



Ice Maker



Total No Frost



Holiday Mode

NOTE

F6FBM36S2 French Door Fridge F7HK36FFBS Distinto Handle Kit



| REQUIRED ACCESSORIES | page |
|--|------|
| F7HK36FFBS Distinto French Door Fridge Handle Kit | 235 |
| TECHNICAL DWG | 268 |
| TECHNICAL DATA | 327 |



DISTINTO

VENTLATION 600-400

SERIES

As important as it is to have a cooking product give you the performance to create all of your cooking masterpieces, effective ventilation is essential to remove cooking odors and excessive heat from the kitchen. To compliment our line of cooking products we offer a complete range of ventilation products which are also hand crafted in Italy and meet all of the criteria one would expect. Quality, performance, fit and finish, are all embodied in our ventilation products. Let us help you find the best solution to meet your individual performance requirements and design needs.

2

VENTILATION

DISTINTO VENTILATION 600 - 400 SERIES







BAFFLE FILTER

Stainless steel and dishwasher safe, our baffle filters allow for perfect filtering of cooking vapors and grease while still offering efficient suction.

LED

For perfect illumination of your cooking surface.

PERFECT QUALITY

Smooth weld finished corner surface.

28" INSERT HOOD

34" INSERT HOOD

F6BP34S1



CFM max 600



LED Lighting



Noise Level 69 (dB)



Ceiling installation



CFM max 600



LED Lighting



Noise Level 69 (dB)



Ceiling installation

SPECIFICATIONS

INSERT HOOD

600 CFM 69 dB sound rating Pro Baffle Filters LED Lighting

OPTIONAL ACCESSORIES page **FMFIL** Charcoal Filters 234 **TECHNICAL DWG** 265

323

TECHNICAL DATA

SPECIFICATIONS INSERT HOOD

600 CFM 69 dB sound rating Baffle Filters LED Lighting

OPTIONAL ACCESSORIES page **FMFIL** Charcoal Filters 234 **TECHNICAL DWG** 265 TECHNICAL DATA 323

30" UNDERCABINET HOOD

36" UNDERCABINET HOOD

F4UC36S1



CFM max 450



LED Lighting



Noise Level 69 (dB)



Wall hung installation

CFM max 450



LED Lighting



Wall hung installation

Noise Level 69 (dB)

SPECIFICATIONS

450 CFM 69 dB sound rating Baffle Filters LED Lighting

INSERT HOOD

OPTIONAL ACCESSORIES page **FMFIL** Charcoal Filters 234 **TECHNICAL DWG** 265 **TECHNICAL DATA** 323

SPECIFICATIONS INSERT HOOD 450 CFM 69 dB sound rating Baffle Filters LED Lighting

OPTIONAL ACCESSORIES page **FMFIL** Charcoal Filters 234 **TECHNICAL DWG** 265 TECHNICAL DATA 323



FULGOR MILANO

DISTINTO CHIMIEY

FULCOR

HOODS



Fulgor Milano has now added an elegant pyramid style chimney wall hood which features the same quality and finish you have come to expect. Like so many of our products this stylish vent hood will offer the power required to do the job and features elegant baffle style filters expected in a professional style product. Available in both 30" and 36" widths, both hoods come standard with 600 CFM performance but feature a power damping system to meet local code requirements for lower CFMs if needed.

220 FULGOR MILANO FULGOR MILANO 221

30" DISTINTO CHIMNEY WALL HOOD

F4CW30S1

Filtering

CFM max 600




Noise Level 69 (dB)



Wall hung installation

F4CW36S1





Filtering



CFM max 600



2 LED lamps



Noise Level 69 (dB)



Wall hung installation



CHIMNEY HOOD

VENTILATION

Scotch brite stainless steel Electronic controls 4 Speed Settings LED lighting Led 2x1,2 W - 3200 K Fan motor 600 CFM 69 dB sound rating

Baffle filter Minimum distance:

- Electric hob 21" 53 cm
- Gas hob 24" 61 cm

OPTIONAL ACCESSORIES page **FMFILCW** Carbon Filter 234 **TECHNICAL DWG** 266 **TECHNICAL DATA** 324

SPECIFICATIONS

CHIMNEY HOOD

Scotch brite stainless steel Electronic controls 4 Speed Settings LED lighting Led 2x1,2 W - 3200 K Fan motor 600 CFM 69 dB sound rating Baffle filter Minimum distance:

- Electric hob 21" - 53 cm

- Gas hob 24" - 61 cm

OPTIONAL ACCESSORIES page **FMFILCW** Carbon Filter 234 **TECHNICAL DWG** 266 TECHNICAL DATA 324



FULGOR MILANO

DISHWASHERS

We love preparing meals for family and friends, but with that comes the clean up. To make life easier, Fulgor Milano offers two distinct styles of dishwashers maintaining the design integrity of your kitchen.

Choose between Distinto, or Integrated which will accept a custom panel to match your cabinets. Our Italian built dishwashers offer all of the features that have become the standard in premium dishwashers models on the market today. Quiet performance, stainless interior, flow-through heater, adjustable upper racks and amazing washing results are just some of the features you can expect from our dishwashers.

DISHWASHERS

DETERGENT & WATER SOFTENING

You can use powder, liquid/gel or tablet detergents in the machine. Cleaning, rinsing and drying performance of your dishwasher will increase when water softening system is adjusted properly.

FUNCTIONS

Washing programs of your dishwasher are designed to obtain the best cleaning effect, considering the type of the soiling, soiling degree and properties of the dishes to be washed.





BASKET

The baskets have been redesigned to be more robust and flexible while providing easy loading for spotless dishes. Featuring three wash arms and a triple filtration system for precise cleaning.

WASH SYSTEM

The wash system automatically adjusts the water volume, pressure, and temperature according to load size, soil levels, and program setting.

ADJUSTABILITY

The height-adjustable upper rack easily accommodates a variety of glassware sizes and makes room for larger items below.

CUSTOMIZABLE

Offers flexibility while arranging dishes for wash. Thanks to this mechanism, you can use your basket in three different positions: namely lower, middle and upper positions.

DISHWASH

24" OVERLAY DISHWASHER

24" STAINLESS STEEL BUILT-IN DISHWASHER SHOWN WITH DISTINTO HANDLE KIT



F6DWT24SS2 F7UHK24DISH



Noise Level 45 (dB)



Steel Tub



Fast Wash Cycle



1/2 Load Cycle



Flexible Rack Loading





Noise Level 45 (dB)



Steel Tub



Fast Wash Cycle



Flexible Rack Loading

1/2 Load Cycle

NOTE

F6DWT24SS2 F7UHK24DISH

Dishwasher Distinto Handle Kit

SPECIFICATIONS

DISHWASHER

16 Place Settings

6 Programs

45 dB Silent Operations

Flexible Rack Loading All-In-One single tablet Detergent Function

Fast Function

5 Level Wash

Flow-Through Heater

3 way Euro Filtering System

Front Adjustable rear feet

Adjustable Hinge System

Built-in High Loop with Air Gap

Double Motion Float System

REQUIRED ACCESSORIES page

F7UHK24DISH 234

Distinto Dishwasher Handle Kit

TECHNICAL DWG 269 **TECHNICAL DATA** 328 **SPECIFICATIONS**

6 Programs

45 dB Silent Operations

All-In-One single tablet Detergent Function

5 Level Wash

Flow-Through Heater

3 way Euro Filtering System

Front Adjustable rear feet

Adjustable Hinge System

Built-in High Loop with Air Gap

page

FEATURES

16 Place Settings

Flexible Rack Loading

Fast Function

Double Motion Float System

269

329

TECHNICAL DWG

TECHNICAL DATA



DISTINTO OPTIONAL ACCESSORIES





FULGOR MILANO 231

CODE FMWOK



Small pot reduction


CODE FMSPR

Uniquely creactiveed accessory allows you to use pans smaller than 4 inches on a stable, flat cooking surface




Wok ring

For best results with a wok, use this accessory with the high-BTU burner specifically creactiveed for wok cooking.

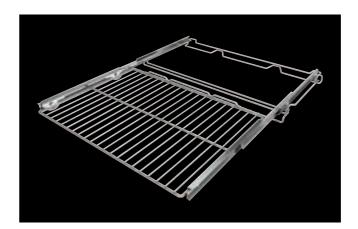

30" Telescopic Oven Rack

CODE FMTR630

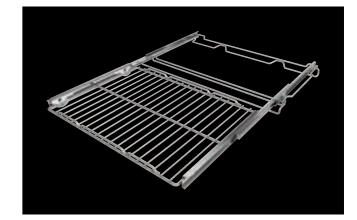

30" Telescopic Oven Rack

CODE FMTR130



Simmer plate

CODE FMSIM

The cast-iron simmer plate provides a steady simmer temperature, evenly distributed across a stable heating surface.



24" Telescopic guides

 ${\tt CODE} \ \textbf{FMTELG}$

ACCESSORIES




Trilaminate magnetic plates for non induction pots

CODE INDUKIT4




Carbon filter for hoods model F4CW30S1 and F4CW36S1

CODE FMFILCW

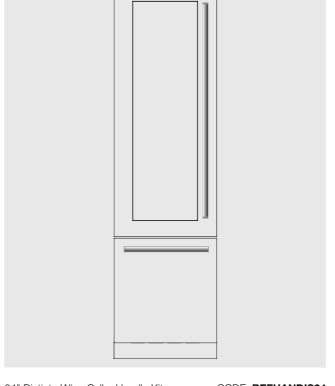

24" Distinto Wine Cellar Handle Kit

CODE REFHANDIS24

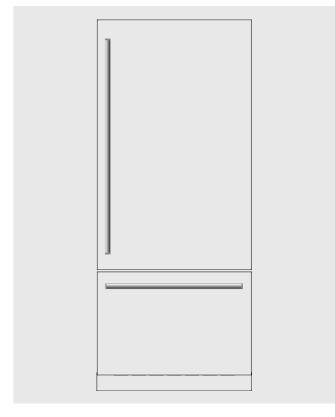

36" Distinto Fridge Handle Kit

CODE REFHANDIS36



OPTIONAL ACCESSORIES


DISHWASHER

OPTIONAL ACCESSORIES



Charcoal filters (for recirculating installations)

CODE FMFIL

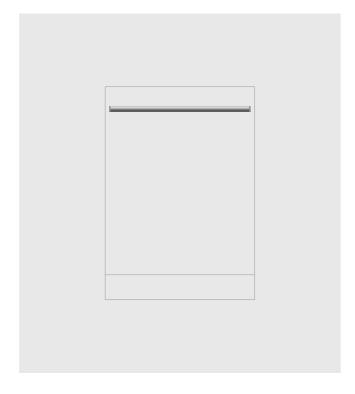


Distinto Dishwasher Handle Kit

CODE F7UHK24DISH

Distinto French Door Fridge Handle Kit

CODE F7HK36FFBS

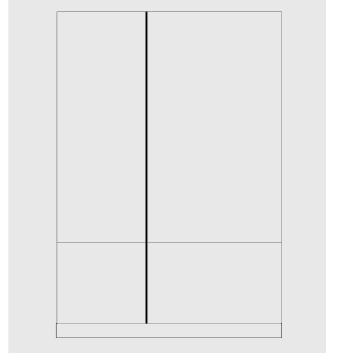


36" Built-In Fridge and 24" Built-In Wine Cellar Installation Kit.


Handle kit is to be supplied by the installer. CODE **REFSBSINT60**





PRODUCT DRAWINGS


PROFESSIONAL

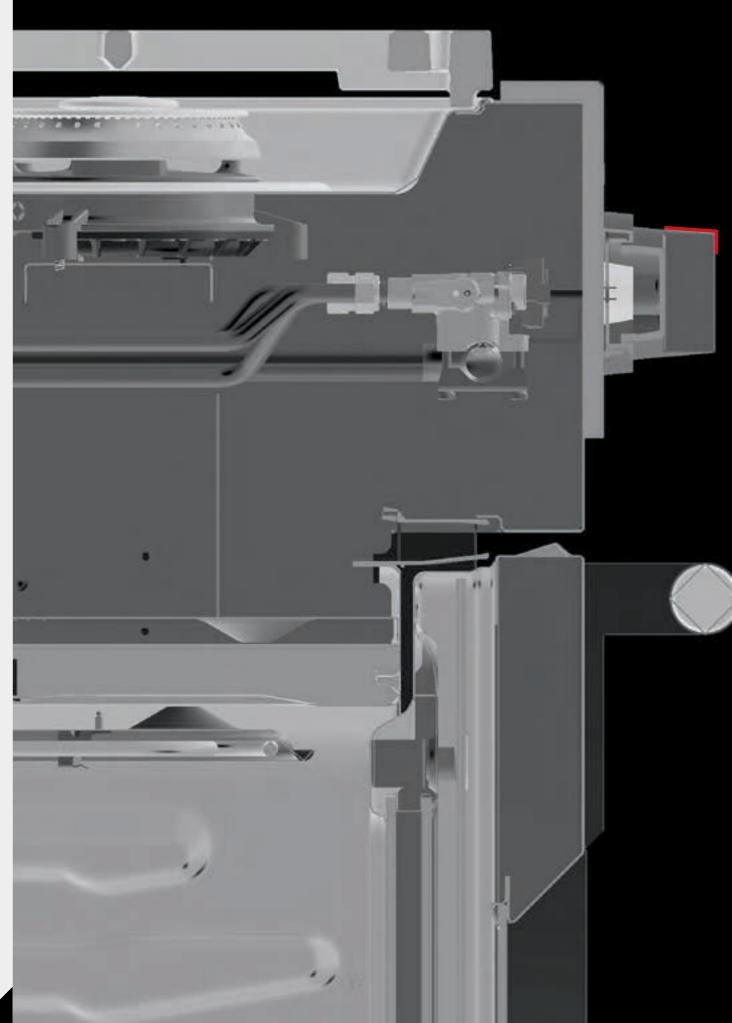

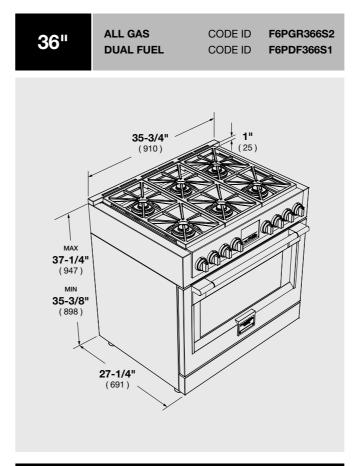

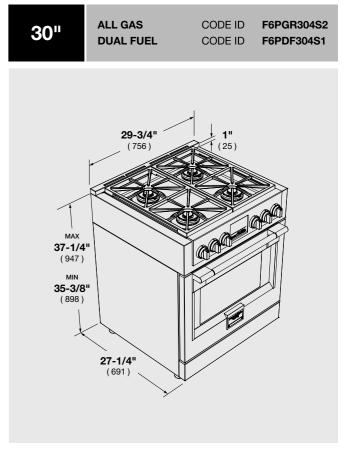


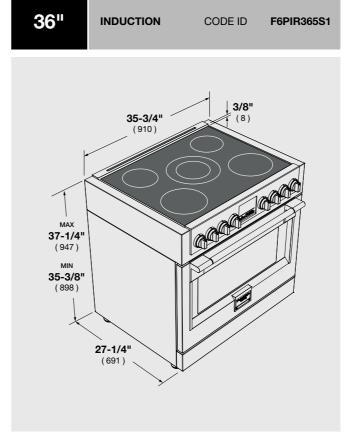


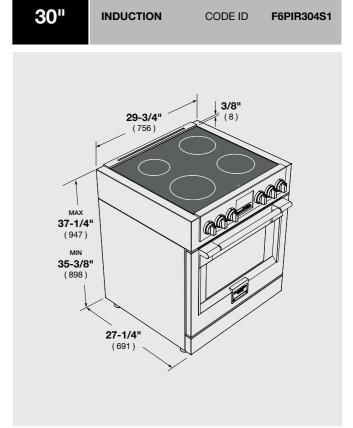



DWG


238 FULGOR MILANO

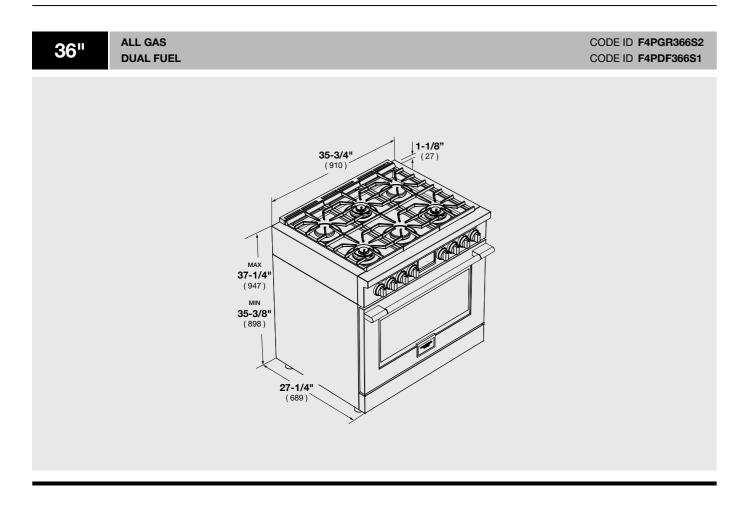

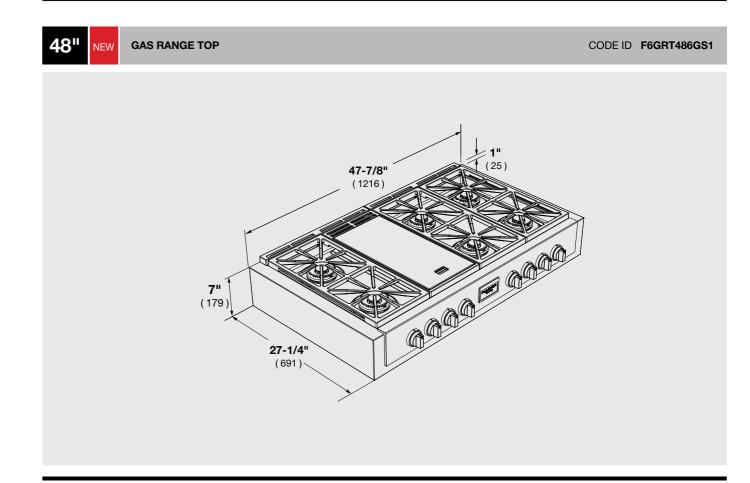

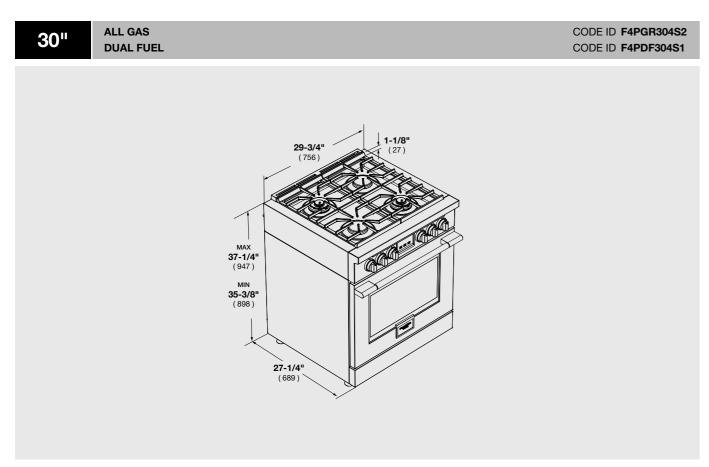


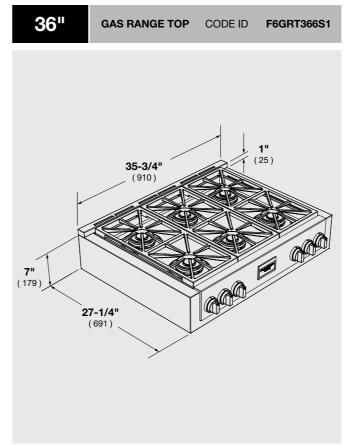


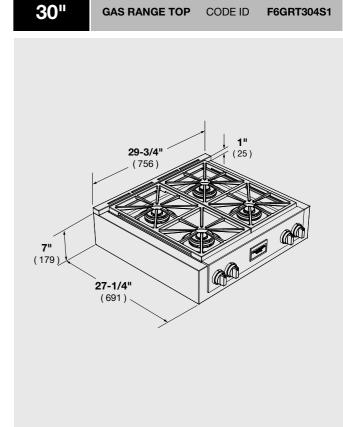



DWG

TECHNICAL DIMENSION

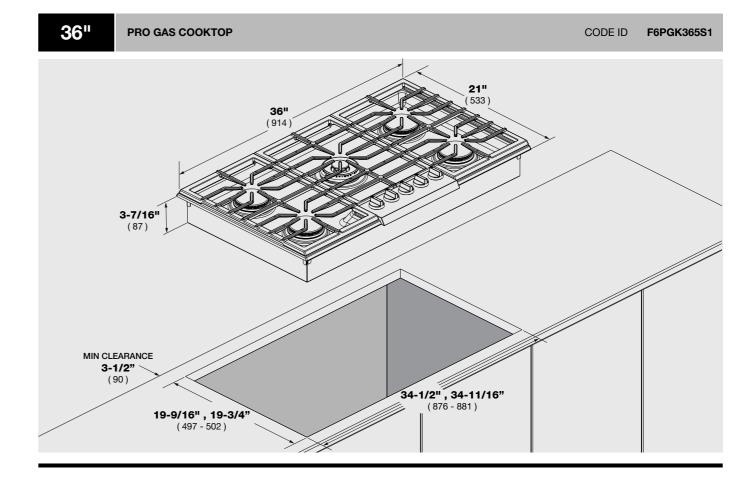


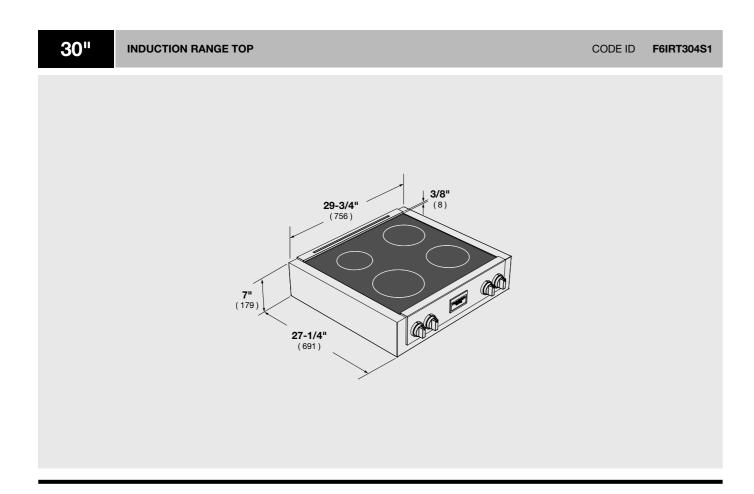


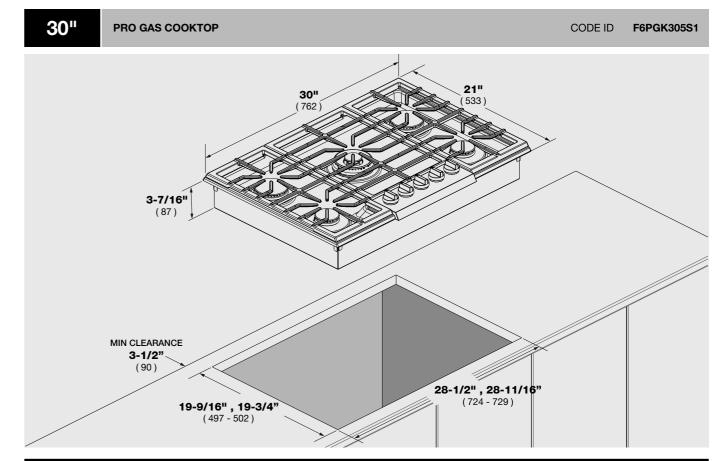


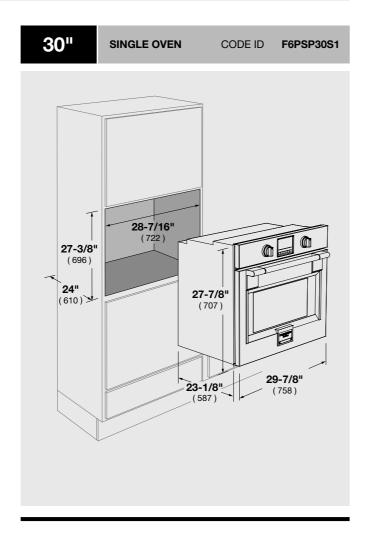

TECHNICAL DIMENSION

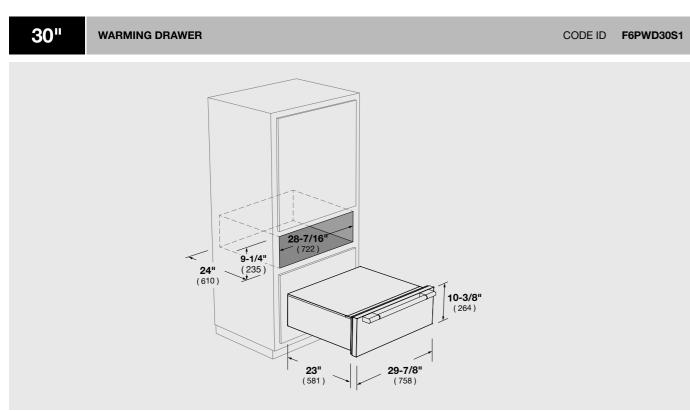

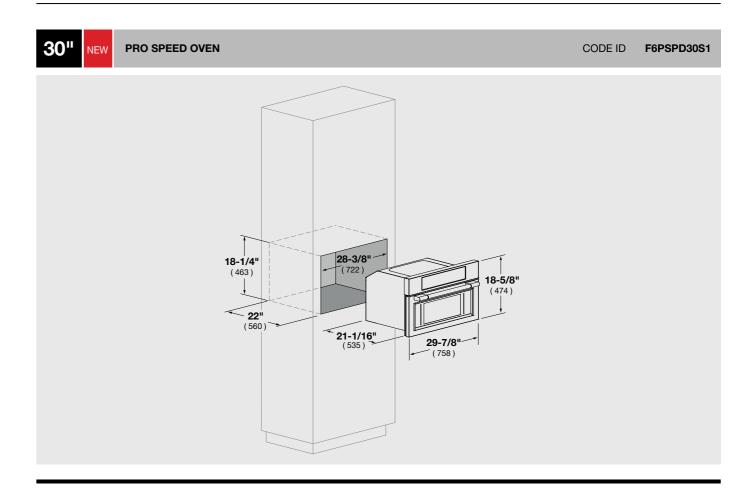


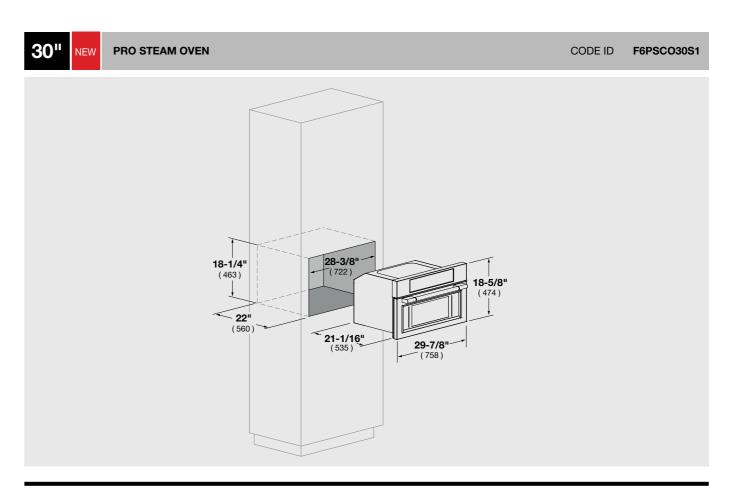



- DWG


DWG


TECHNICAL DIMENSION

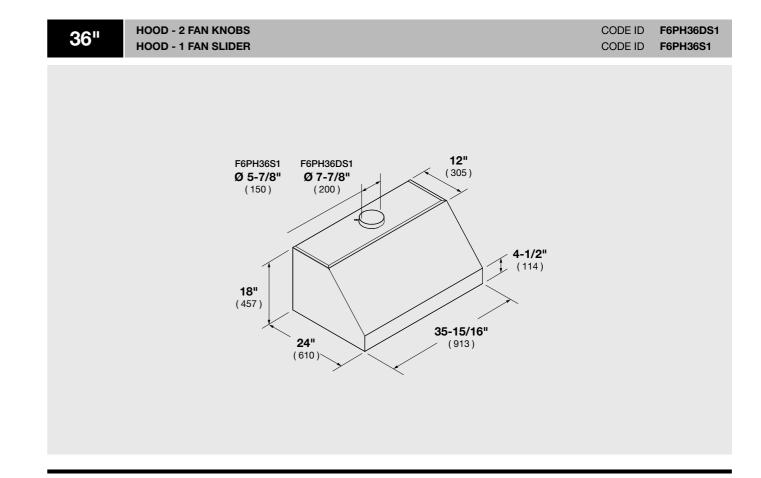


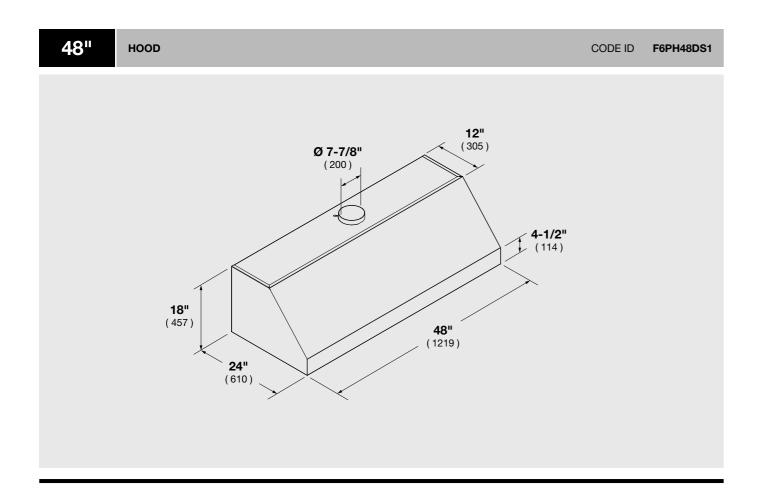


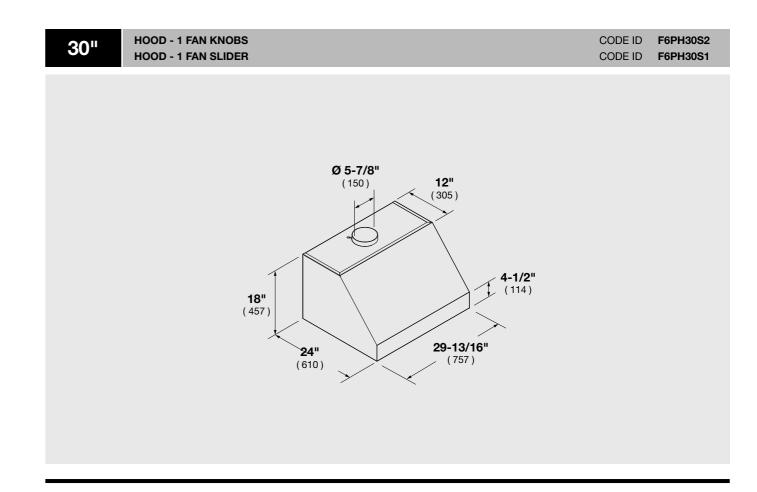

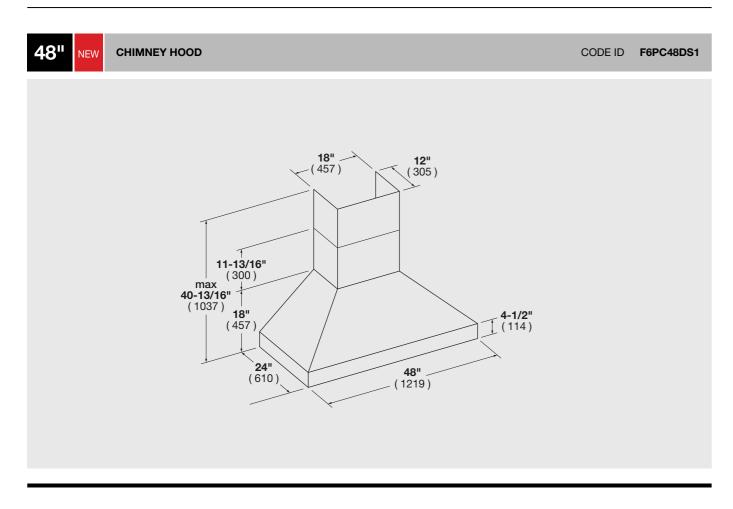


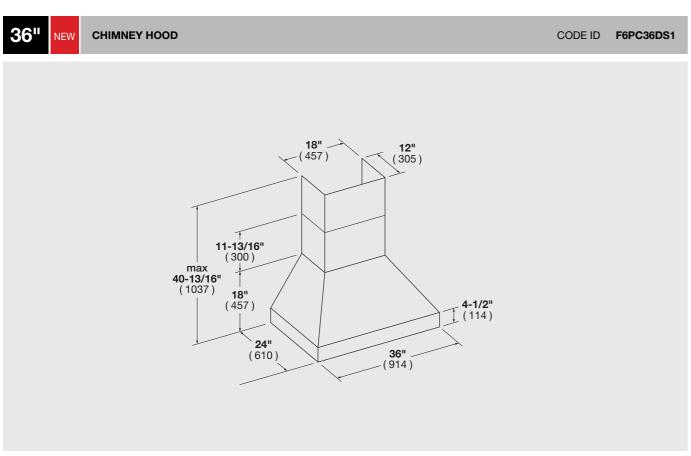


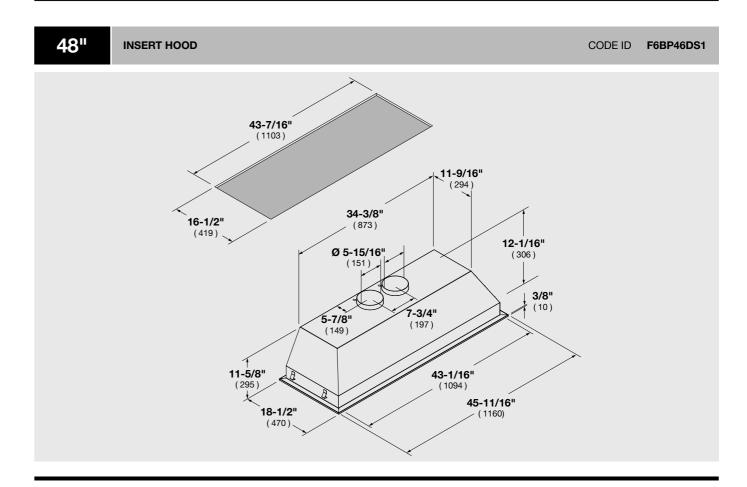


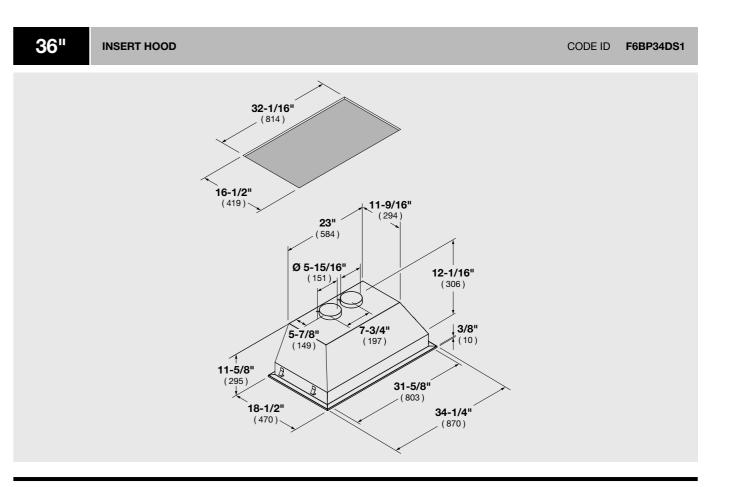



DWG

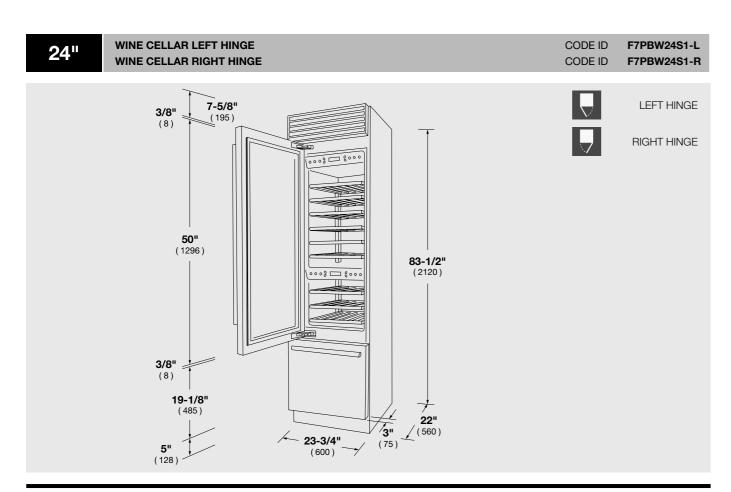

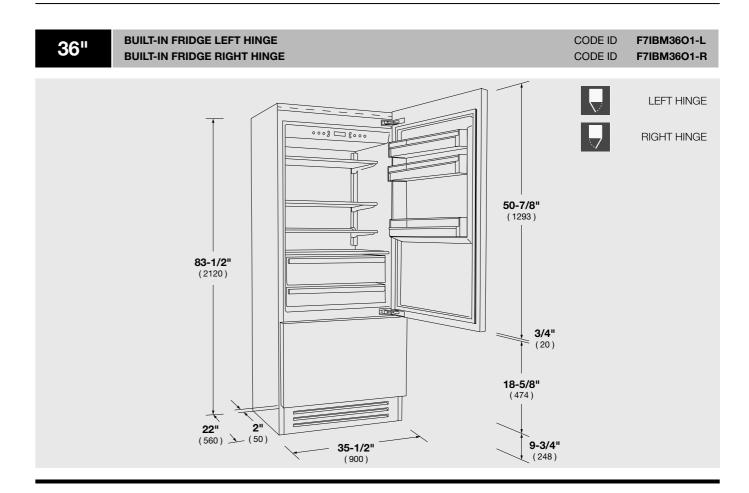

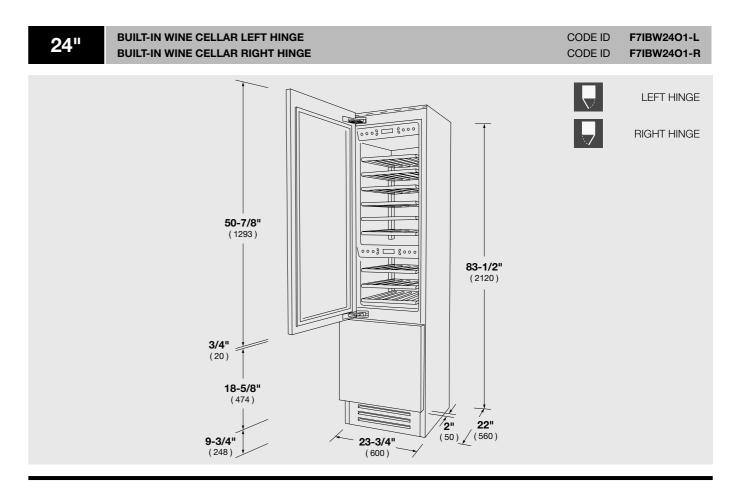

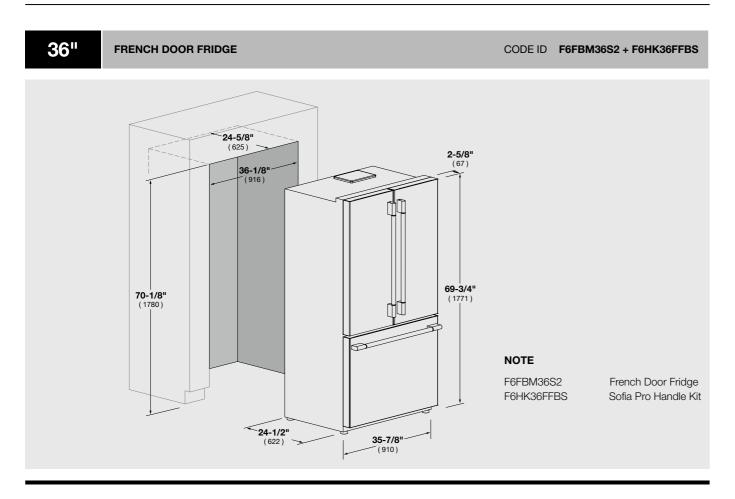


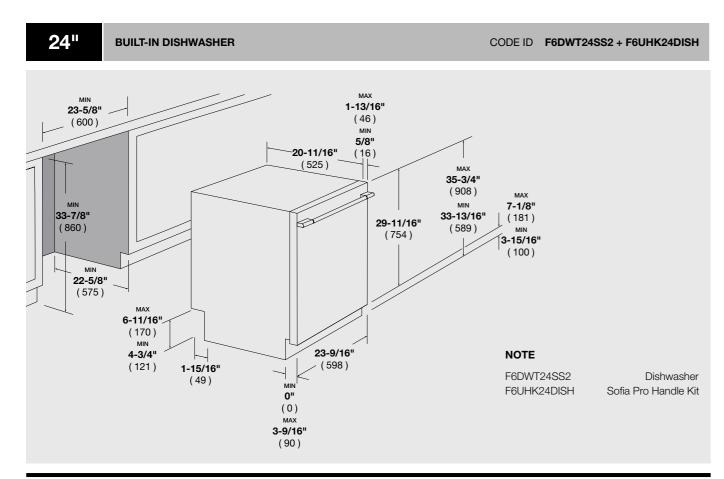


FULGOR MILANO

PRODUCT DRAWINGS

DISTINTO

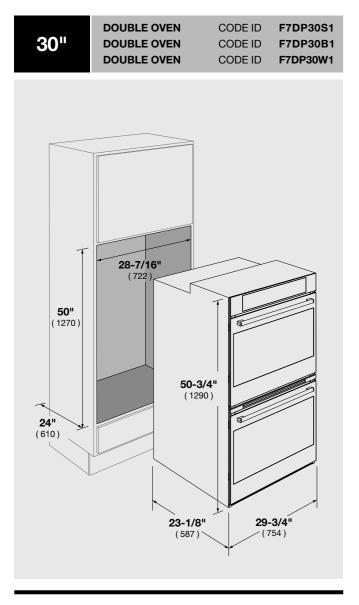


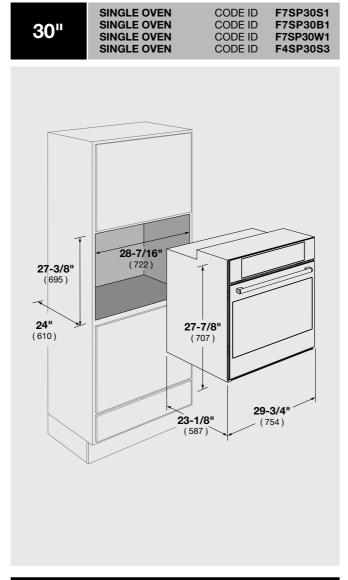



30"


CODE ID


F7SP30S1 F7SP30B1

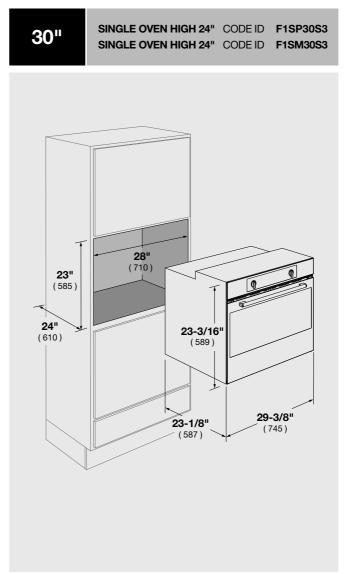


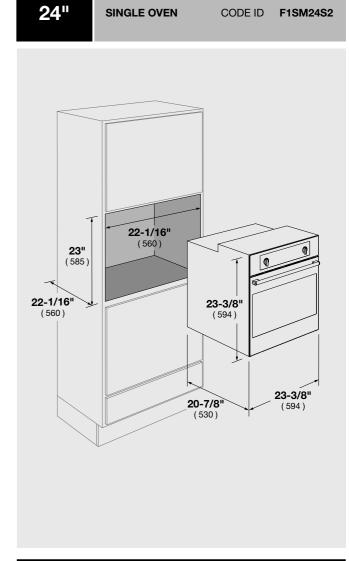


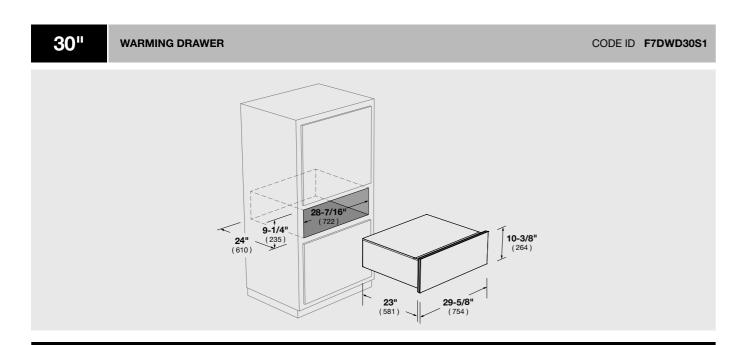


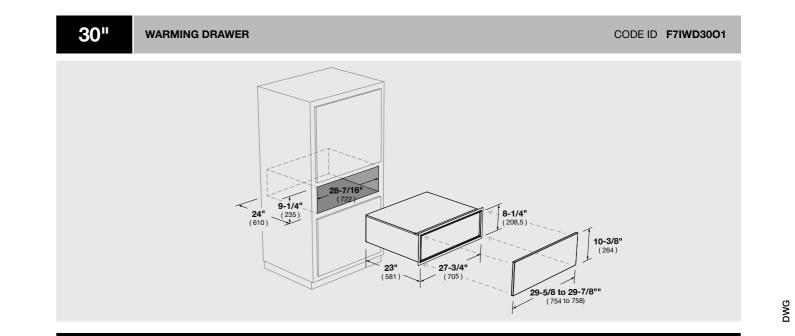

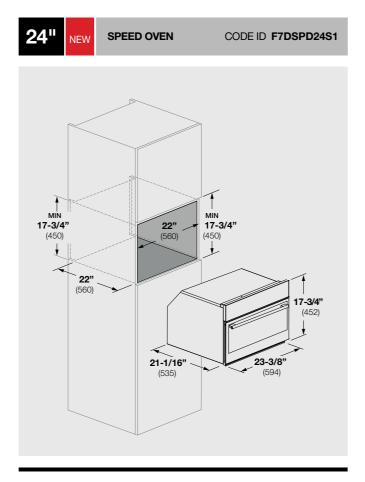

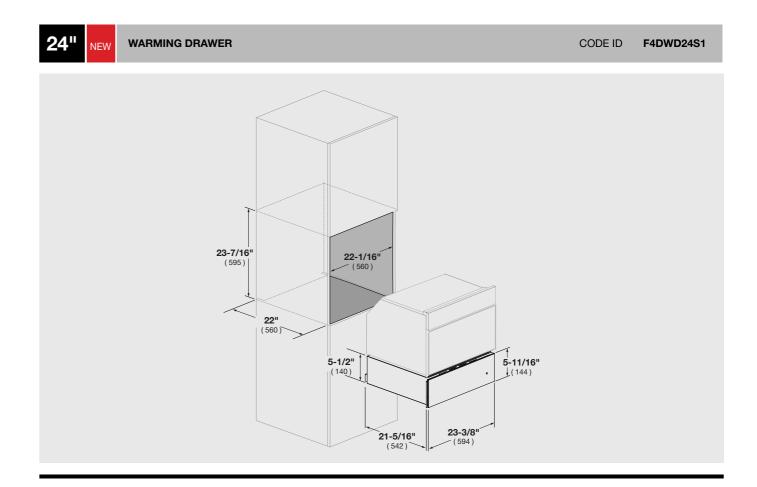


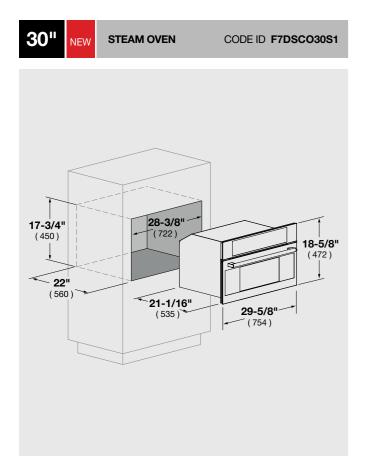


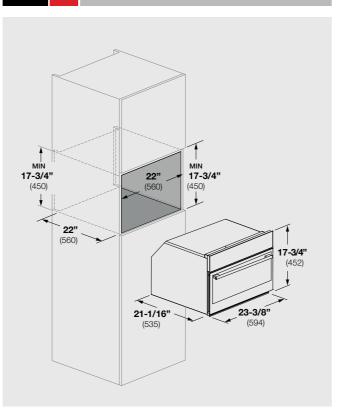



CODE ID F7SC024S1


STEAM OVEN

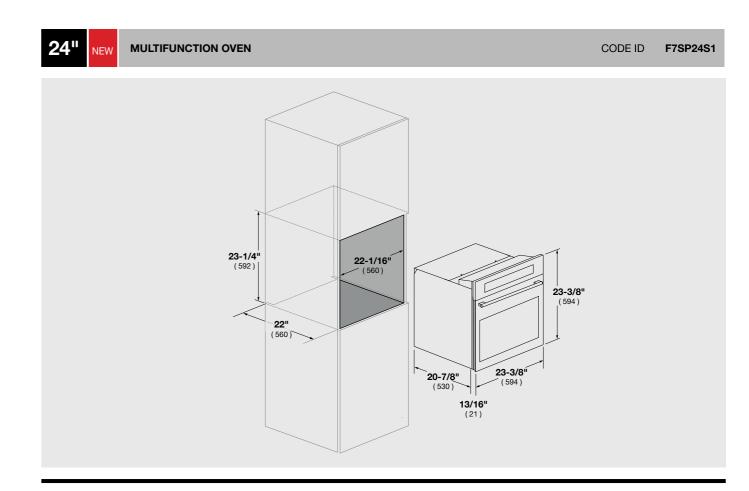


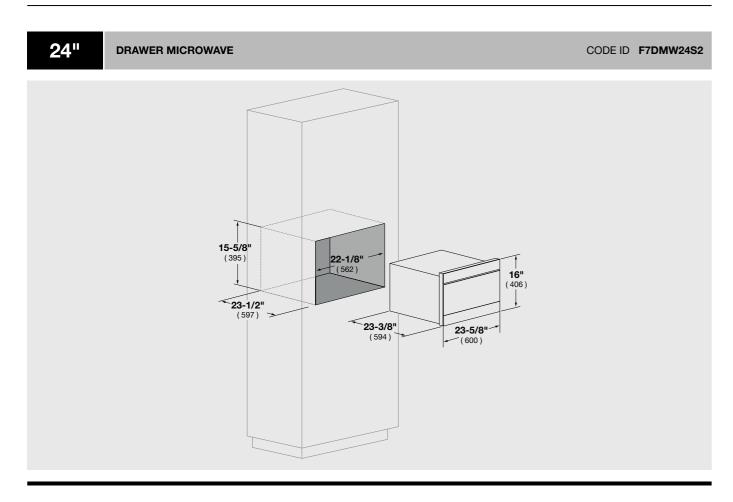


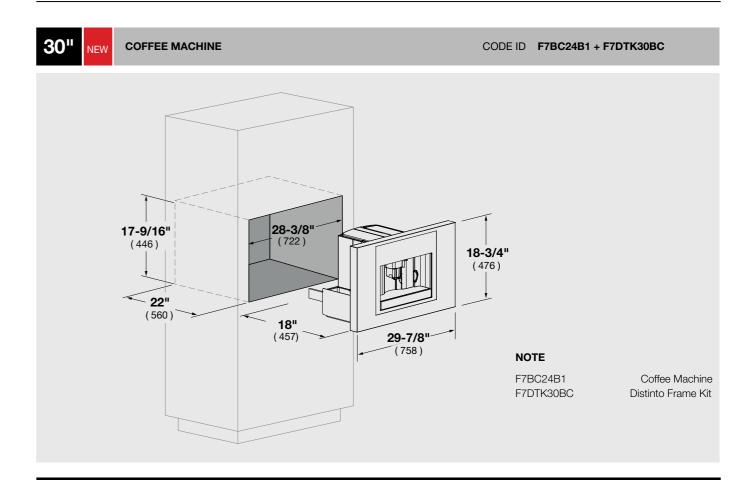


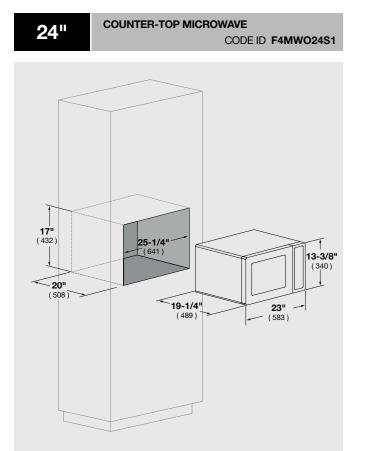


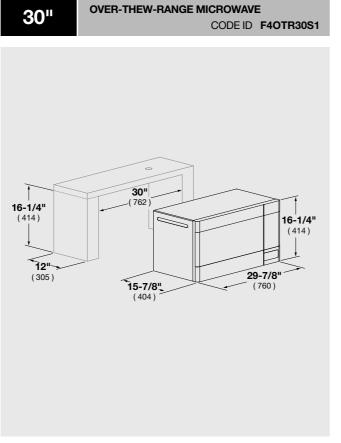


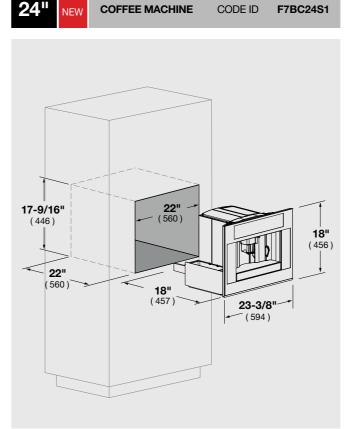


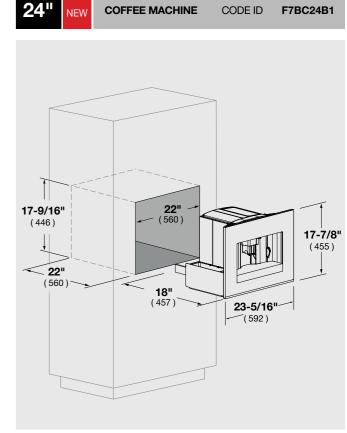

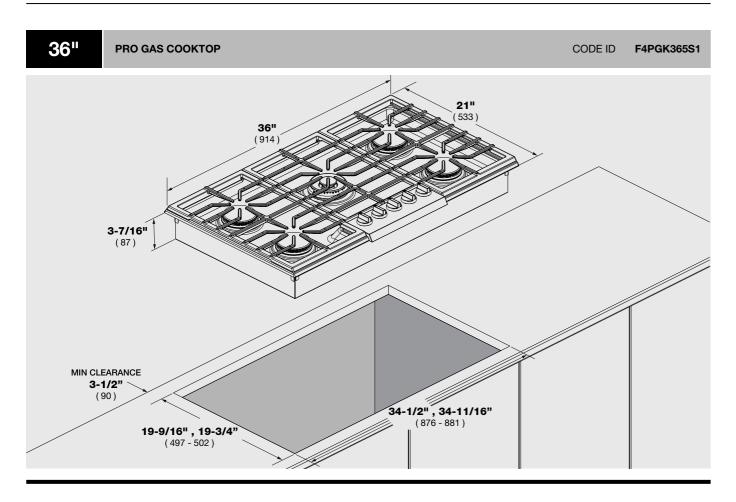


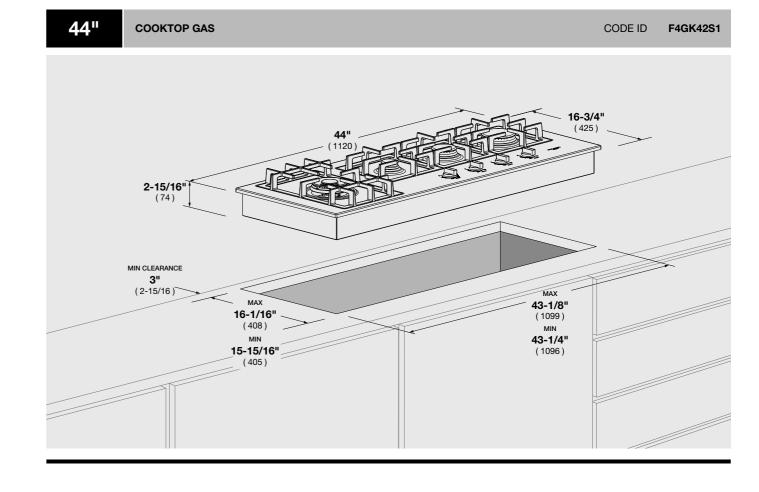


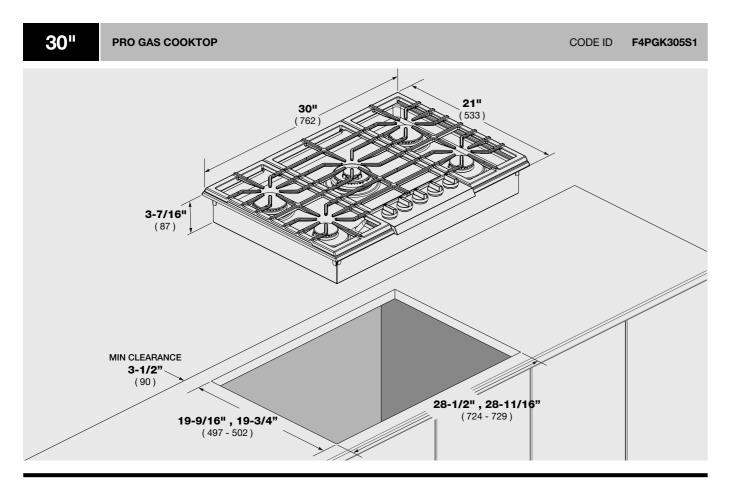


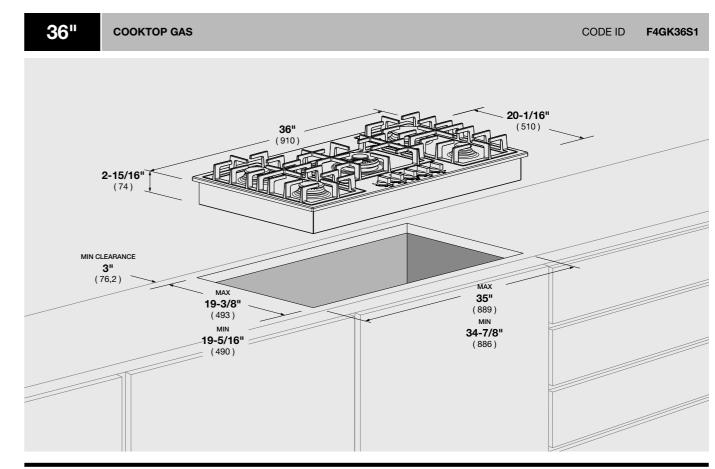



260 FULGOR MILANO

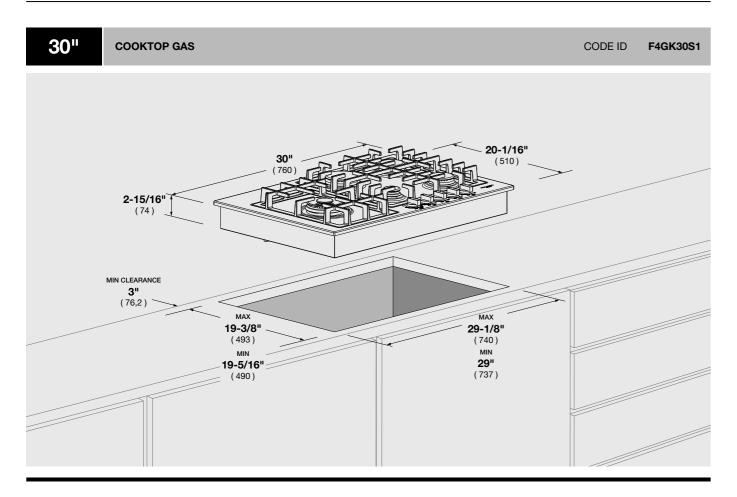


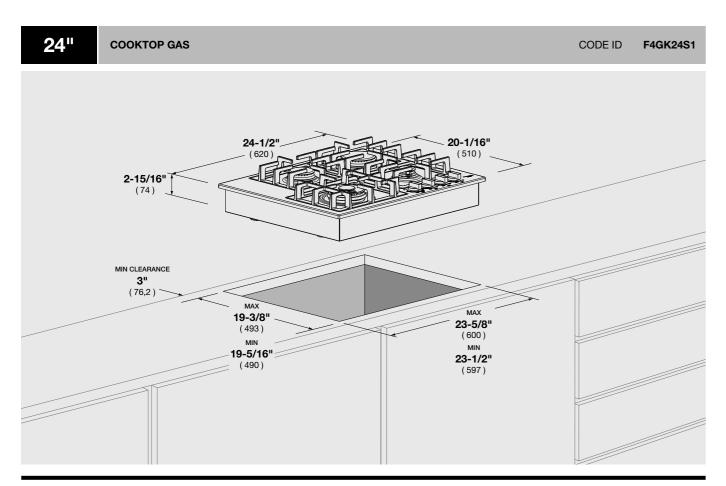


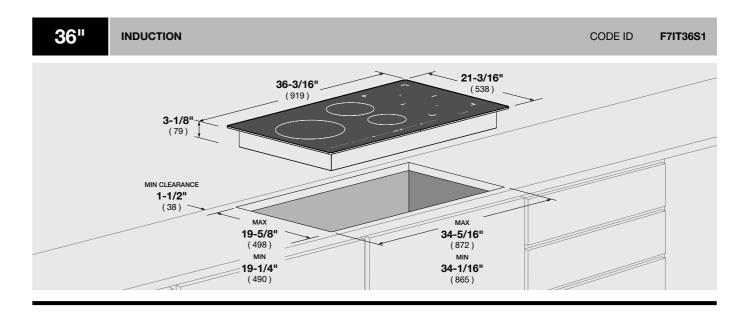


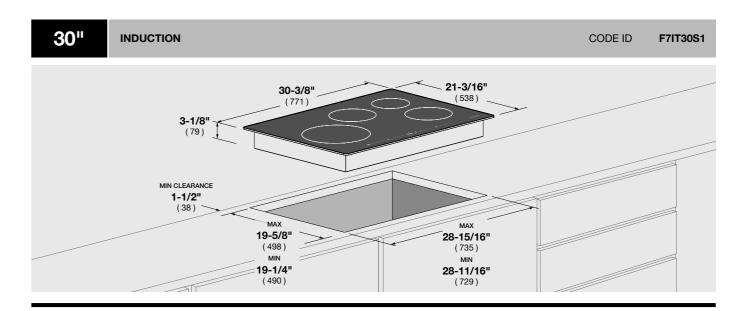


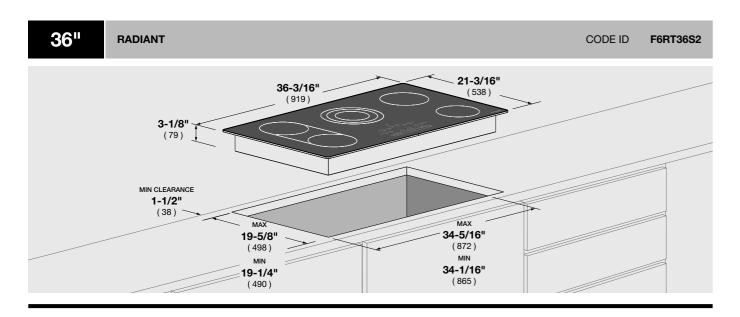


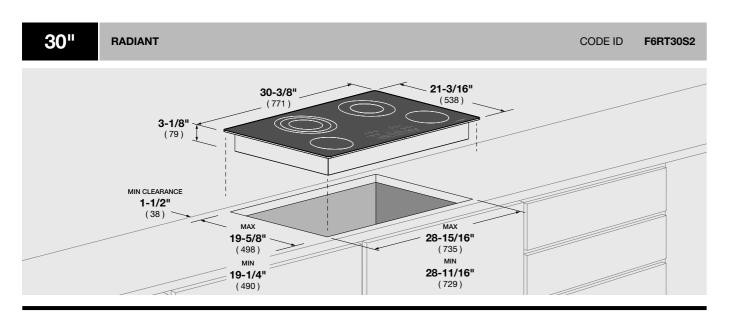


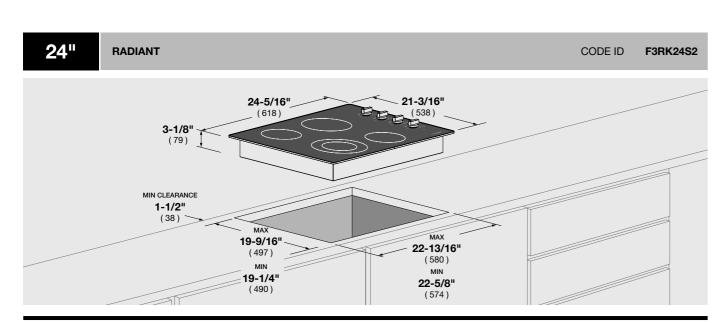


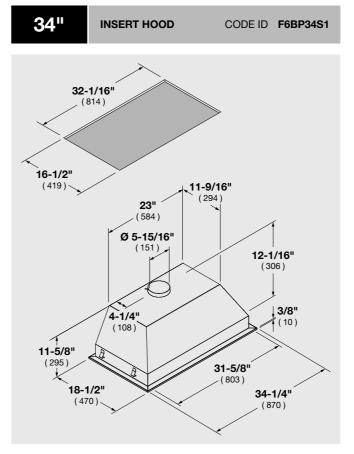


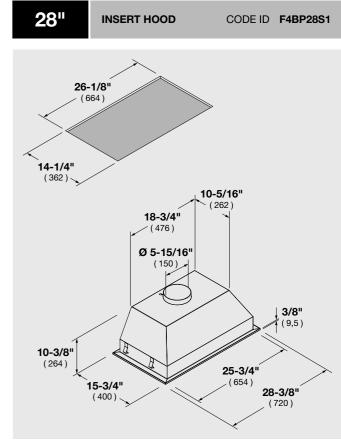


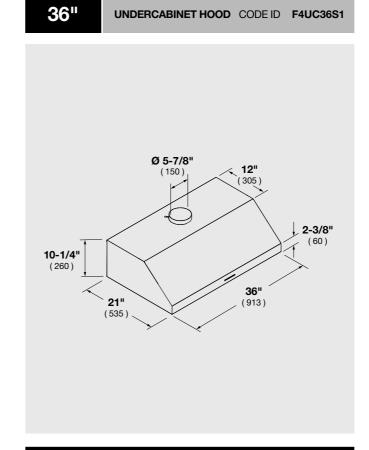


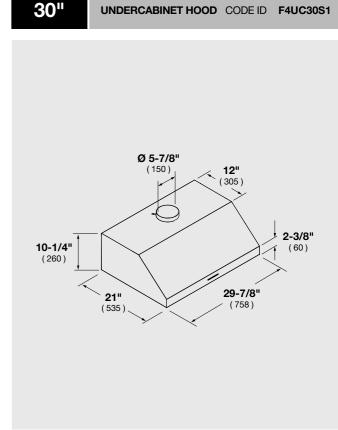

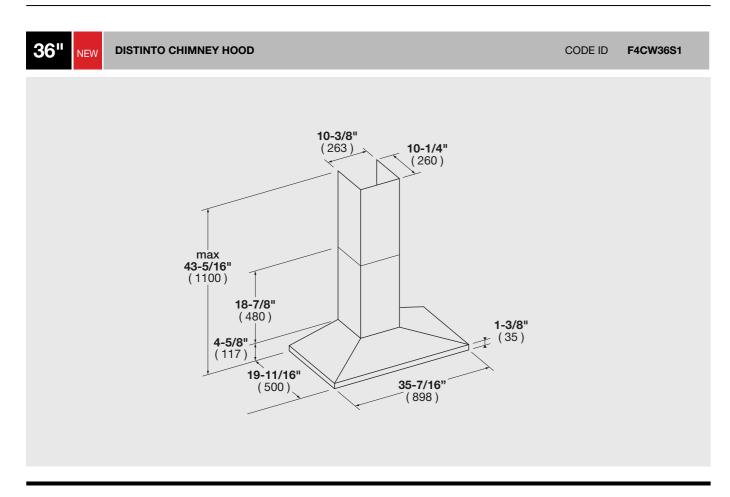


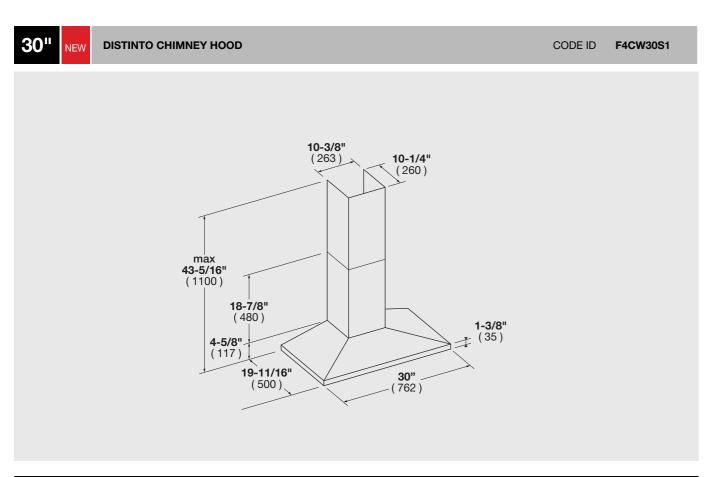


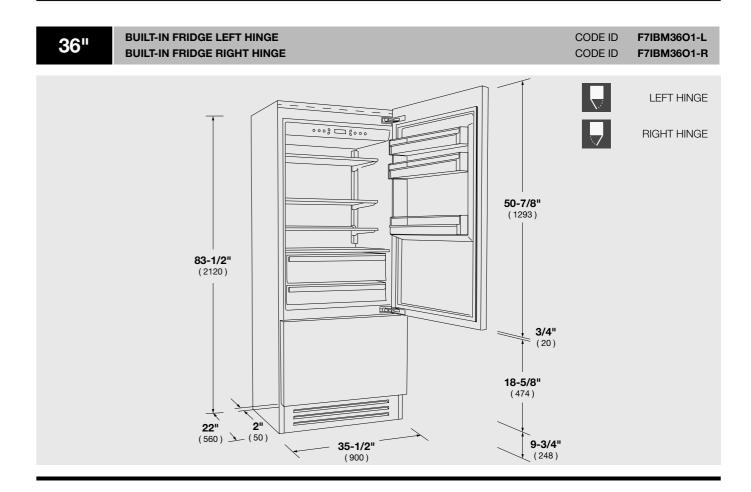


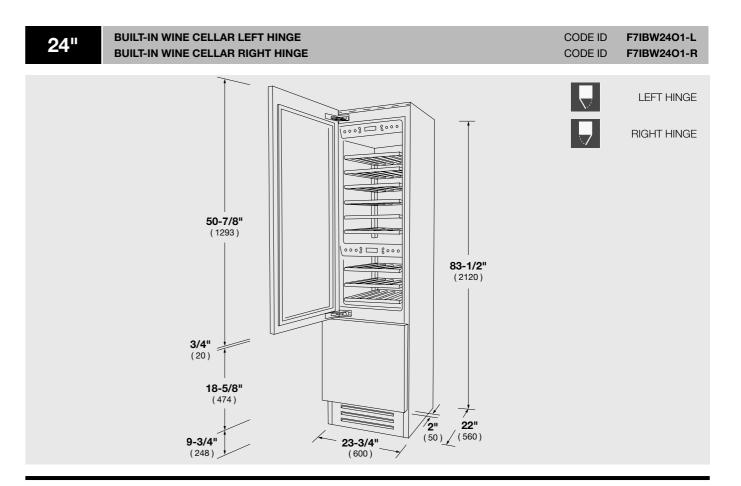

REFRIGERATION TECHNICAL DIMENSION DISHWASHERS TECHNICAL DIMENSION

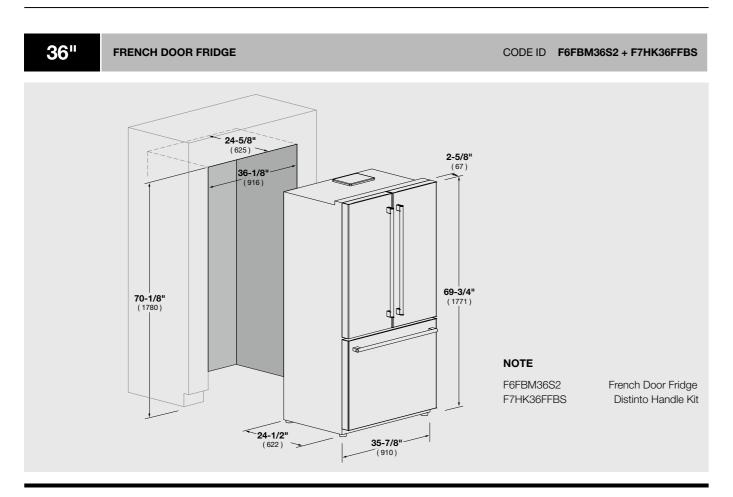

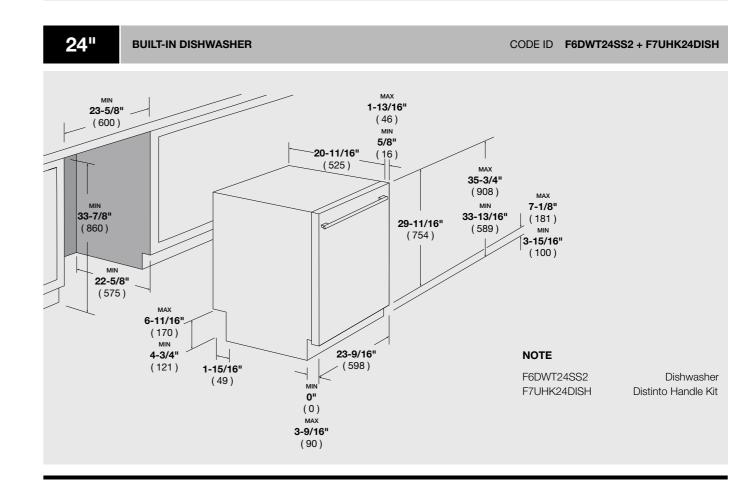

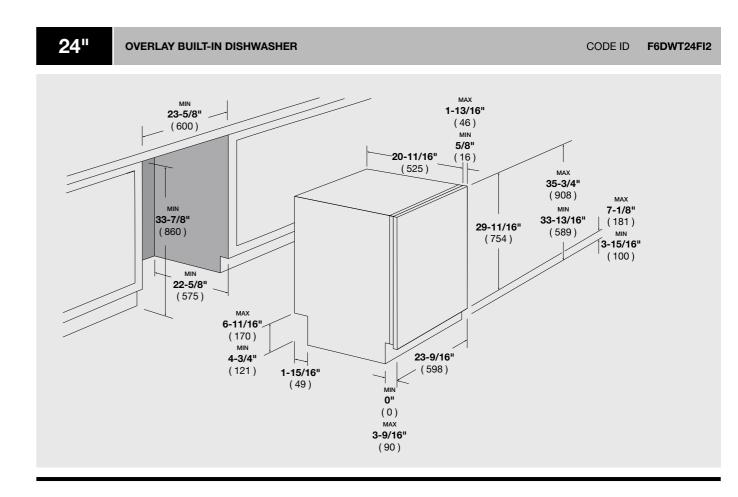

DWG



TECHNICAL DATA PROFESSIONAL

DUAL FUEL PROFESSIONAL RANGE



| CODE ID | 48" DUAL FUEL PROFESSIONAL RANGE F6PDF486GS1 | | | | | |
|--|---|---|---|---|--|--|
| Series | | 60 | 00 | | | |
| Finish | | Professional Desig | n - Stainless Steel | | | |
| CONTROL PANEL Control Type | | 11 Heavy [| Duty Knobe | | | |
| Oven Programming | | | 6 Touch Kevs | | | |
| Display: Clock - Temperature - Function | | White | | | | |
| Language | | Eng | lish | | | |
| СООКТОР | | 0.40 (A) | 0 15 | | | |
| Type Cooking Surface | | | G or LP) ck Enamel | | | |
| GAS COOKTOP FEATURES | | Matto Bla | ok Enamoi | | | |
| | | tric Re-ignition system | Dual Crown Burners (Bras | , | | |
| | | ne-out sensing | | lat or with rack) | | |
| | | Mount Injectors Conversion Kit | Pre | ssure Regulator | | |
| Heavy Duty Cast Iron Grates | L.I. | | 3 | | | |
| Cooking Zones | | 6 Burner | + Griddle | | | |
| Burners types | | All Dual Flame/ | | | | |
| Front-L/Front-R - Power (Max/Min) G20 - 5" Front-L/Front-R - Power (Max/Min) G31 - 10" | | 20000 (BTU/h) - 5850V | V / 750 (BTU/h) - 220W V / 750 (BTU/h) - 220W | | | |
| Rear-L/Front Center "Right"/Rear Center "Right"/ | | | ` ' | | | |
| Rear-R - Power (Max/Min) G20 - 5" | | 18000 (BTU/h) - 5300V | V / 750 (BTU/h) - 220W | | | |
| Rear-R/Front Center "Right"/Rear Center "Right"/ Rear-R - Power (Max/Min) G31 - 10" | | 15000 (BTU/h) - 4400V | V / 750 (BTU/h) - 220W | | | |
| Griddle Burner (Center "Left") Power (Max/Min) G20 - 5"/G31 - 10" | | ontrol Griddle Burner - 1150 | . , , | | | |
| OVEN Type | | sory Oven) | 30" (Ma | | | |
| Temperature Regulation | | ax 170/550°F - 75/290°C) | Electric Self-clean - Dual Convection (True Euro Conv.) Electronic Control (min/max 170/550°F - 75/290°C) | | | |
| OVEN FUNCTIONS | | | (,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | | |
| | Pyrolytic Self-Clean | Bake | Pyrolytic Self-Clean | Bake | | |
| | with automatic door latch Convection Broil | | with automatic door latch Convection Broil | Broil | | |
| | Pizza (Lower Convection) | | Pizza (Lower Convection) | Oven Lights | | |
| ELECTRIC OVEN FEATURES | | , | (2011) | 5 van 22g | | |
| | Preset/Last Used | Preheat Indicator | | Preheat Indicator | | |
| | Temperature Memory Child Door Lock | (25%, 50%, 75%, 100%) Control Display Lock | | (25%, 50%, 75%, 100%) Control Display Lock | | |
| | Automatic Fast Preheat | 12/24 Hour Clock Formats | | 12/24 Hour Clock Formats | | |
| | Sabbath Mode | Temperature Display °C/°F | Sabbath Mode | Temperature Display °C/°F | | |
| | Sabbatii Wode | Terriperature Display C/ T | Meat Probe | | | |
| OVEN DOOR(S) Oven Glass Window | Doon Embo | ssed Window | Doop Embor | ssed Window | | |
| Door Cooling System | | stant Glasses | 4 Heat Resis | | | |
| Door Hinges - Soft-closing System | Heavy Duty | Steady Tilt | Heavy Duty | Steady Tilt | | |
| Handle Style | Stainless Steel Tube Ø | 30mm, Metal End caps | Stainless Steel Tube Ø | 30mm, Metal End caps | | |
| OVEN CAVITY Gross Capacity (cbft) | 2 | .7 | 1 | 1 | | |
| Usable Capacity (cbft) | | .4 | 4.4 | | | |
| Cavity Enamel Color | | ack | Black | | | |
| Rack Positions | | 6 | | 3 | | |
| Oven Lights HEATING ELEMENTS (@240V) | 2x20W | Halogen | 3x20W Halogen | | | |
| Broil Upper Heating Element | 2. | 100 W | 3.5 | 500 W | | |
| Upper Auxiliary Element | | 00 W | | 032 W | | |
| Concealed Bake Lower Heating Element | 17 | 750 W | | 000 W | | |
| Convection Element | 1 x 25 | 500 W | 2 x 13 | 800 W | | |
| OVEN ACCESSORIES Chrome Racks | | 2 | , | 2 | | |
| Enameled Broiler Pan (basin + anti splash) | | - | | <u>-</u> | | |
| Telescopic Chrome Rack | | 1 | | 1 | | |
| DIMENSIONS/WEIGHT | | | | | | |
| Overall dim - Width Overall dim - Height (min - max) | 47 - 3/4 | 4" 8", 38 - 1/4" | 923 mm - 97 | 6 mm | | |
| Overall dim - Height (min - max) Overall dim - Depth | 29 - 3/4 | | | mm | | |
| Gross Weight | 529 lbs | | 240 | | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | · | | |
| kW / Amps rating at 120-240V, 60Hz | | 7.00 kW | | | | |
| kW / Amps rating at 120-208V, 60Hz Power Cable | | | ' - 29.5A 14-50P | | | |
| INSTRUCTIONS FOR USE | | ivellia | 1 1 -00F | | | |
| Use & Care Manual / Installation Manual | | English / Frer | nch / Spanish | | | |
| | Lingiisti / Trencti / Spanisti | | | | | |

SOFIA

DUAL FUEL PROFESSIONAL RANGE





| CODE ID | | DFESSIONAL RANGE F366S1 | 1 | DFESSIONAL RANGE F304S1 | |
|---|---|--|---|--|--|
| Series | 6 | 00 | | 00 | |
| Finish | Professional Design | gn - Stainless Steel | Professional Design | gn - Stainless Steel | |
| CONTROL PANEL Control Type | Q ∐ooyy [| Outy Knobs | 6 H0000 F | Nuty Knobs | |
| Oven Programming | | n 6 Touch Keys | 6 Heavy Duty Knobs Electronic with 6 Touch Keys | | |
| Display: Clock - Temperature - Function | | e LED | | e LED | |
| Language | English / Fre | nch / Spanish | English / Fre | nch / Spanish | |
| СООКТОР | 040/4 | 0 10 | 0.40.41 | 0 10 | |
| Type Cooking Surface | | G or LP) | GAS (NG or LP) Matte Black Enamel | | |
| GAS COOKTOP FEATURES | Watto Bia | OK Enamo | Watto Bla | OK EHAMOI | |
| Electric Re-ignition system | | • | | • | |
| Flame-out sensing | | • | | • | |
| Top Mount Injectors L.P. Conversion Kit | | • | | | |
| Dual Crown Brass Burner | | • | | • | |
| Heavy Duty Cast Iron Grates | | 3 | | 2 | |
| Cooking Zones | | 6 | | 4 | |
| Burners types | | /Simmer Burner | All Dual Flame | Simmer Burner | |
| Power Front-L,Front-R (Max/Min) NG Power Front-R (Max/Min) NG | 20000 (BTU/h) - 5900\ | N / 750 (BTU/h) - 220W | 20000 (RTI I/h) - 5000) | - V / 750 (BTU/h) - 220W | |
| Power (Max/Min) NG | 18000 (BTU/h) - 5300\ | - N / 750 (BTU/h) - 220W | | V / 750 (BTU/h) - 220W | |
| Power (Max/Min) LP | | N / 750 (BTU/h) - 220W | | V / 750 (BTU/h) - 220W | |
| OVEN | | | | | |
| Type | | Convection (True Euro Conv.) | | onvection (True Euro Conv.) | |
| Temperature Regulation OVEN FUNCTIONS | Electronic Control (min/max 170/550°F - 75/290°C) | | Electronic Control (min/m | ax 170/550°F - 75/290°C) | |
| OVER I GROTIONS | Pyrolytic Self-Clean | Dehydrate | Pyrolytic Self-Clean | Dehydrate | |
| | True Convection | Thaw (Defrost) | True Convection | Thaw (Defrost) | |
| | Convection Broil | Proof (Warm) | Convection Broil | Proof (Warm) | |
| | Convection Roast | Keep warm (Warm Plus) | Convection Roast | Keep warm (Warm Plus) | |
| | Pizza (Lower Convection) Bake | Oven Lights Broil | Pizza (Lower Convection) Bake | Oven Lights Broil | |
| ELECTRIC OVEN FEATURES | Dano | | Dane | 5.0 | |
| | Preset/Last Used | Preheat Indicator | Preset/Last Used | Preheat Indicator | |
| | Temperature Memory | (25%, 50%, 75%, 100%) | Temperature Memory | (25%, 50%, 75%, 100%) | |
| | Child Door Lock | Control Display Lock | Child Door Lock | Control Display Lock | |
| | Fast Preheat Sabbath Mode | 12/24 Hour Clock Formats Temperature Display °C/°F | Fast Preheat Sabbath Mode | 12/24 Hour Clock Formats Temperature Display °C/°F | |
| | Meat Probe | Terriperature Display C/ T | Meat Probe | Temperature Display C/ T | |
| OVEN DOOR(S) | 111000111000 | I. | Model 1000 | | |
| Oven Glass Window | | Extra Wide Window | - | Extra Wide Window | |
| Door Cooling System | | stant Glasses | | stant Glasses | |
| Door Hinges - Soft-closing System Handle Style | | y Steady Tilt with Metal End caps | | v Steady Tilt with Metal End caps | |
| OVEN CAVITY | Otalilless Oteel Tube | With Metal End Caps | Stairliess Steel Tube | with Metal Life caps | |
| Gross Capacity (cbft) | 5 | 5.7 | 4.4 | | |
| Usable Capacity (cbft) | | .9 | 4.1 | | |
| Cavity Enamel Color | | ack | | ack | |
| Rack Positions Oven Lights | | 6 Halogen | | 6 Halogen | |
| HEATING ELEMENTS (@240V) | JAZUVV | Tialogett | SAZOVV | ilalogeli | |
| Broil Upper Heating Element | 3 | 500 W | 35 | 500 W | |
| Upper Auxiliary Element | | 032 W | | 032 W | |
| Concealed Bake Lower Heating Element | | 000 W | | 000 W | |
| OVEN ACCESSORIES | 2 x 1 | 300 W | 2 x 13 | 300 W | |
| Chrome Racks | | 2 | | 2 | |
| Enameled Broiler Pan (basin + anti splash) | | 1 | | 1 | |
| Telescopic Chrome Rack | | 1 | | 1 | |
| DIMENSIONS/WEIGHT | 05 0/4# | 040 | 00 0/4# | 750 | |
| Overall dim - Width Overall dim - Height (min - max) | 35 - 3/4" 35 - 3/8", 37 - 1/4" | 910 mm 898 mm - 947mm | 29 - 3/4" 36 - 3/8", 38 - 1/4" | 758 mm 923 mm - 972 mm | |
| Overall dim - Depth | 29 - 3/4" | 756 mm | 29 - 3/4" | 756 mm | |
| Gross Weight | 382 lbs | 174 kg | 326 lbs | 148 kg | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | | |
| kW / Amps rating at 120-240V, 60Hz | | / - 16.9A | | ' - 16.9A | |
| kW / Amps rating at 120-208V, 60Hz Power Cable | | / - 17.5A 14-50P | | ' - 17.5A 14-50P | |
| INSTRUCTIONS FOR USE | iveilla | I - UU | iveilla | 17 001 | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Fre | nch / Spanish | |
| | | | English / French / Spanish | | |



| CODE ID | 48" ALL GAS PROFESSIONAL RANGE F6PGR486GS2 | | | | | |
|--|---|--------------------------------|---|--------------------------|--|--|
| Series | | 600 S | Series | | | |
| Finish | | Professional Desig | | | | |
| CONTROL PANEL | | | | | | |
| Control Type | | 11 Heavy D | | | | |
| Oven Programming | | | 6 Touch Keys | | | |
| Display: Clock - Temperature - Function Language | | | nite LED inglish | | | |
| COOKTOP | | LIIY | 11911 | | | |
| Туре | | GAS (No | G or LP) | | | |
| Cooking Surface | | | ck Enamel | | | |
| GAS COOKTOP FEATURES | | | | | | |
| | | tric Re-ignition system | Dual Crown Burners (Brass or Alluminum) | | | |
| | | ne-out sensing | , | lat or with rack) | | |
| | | Mount Injectors Conversion Kit | Pres | ssure Regulator | | |
| Heavy Duty Cast Iron Grates | L.F. | Conversion Kit | <u> </u> | | | |
| Cooking Zones | | | + Griddle | | | |
| Burners types | | All Dual Flame/ | | | | |
| Front-L/Front-R - Power (Max/Min) G20 - 5" | | 20000 (BTU/h) - 5850V | | | | |
| Front-L/Front-R - Power (Max/Min) G31 - 10" | | 15000 (BTU/h) - 4400V | V / 750 (BTU/h) - 220W | | | |
| Rear-L/Front Center "Right"/Rear Center "Right"/ | | 18000 (BTU/h) - 5300V | V / 750 (BTU/h) - 220W | | | |
| Rear-R - Power (Max/Min) G20 - 5" | | (2.0,11) 00000 | | | | |
| Rear-R/Front Center "Right"/Rear Center "Right"/ Rear-R - Power (Max/Min) G31 - 10" | | 15000 (BTU/h) - 4400V | V / 750 (BTU/h) - 220W | | | |
| Griddle Burner (Center "Left") | | | | | | |
| Power (Max/Min) G20 - 5"/G31 - 10" | Thermostat Co | ontrol Griddle Burner - 1150 | 0 (BTU/h) - 3370W / 2000 (I | BTU/h) - 590W | | |
| OVEN | 18" (Acces | ssory Oven) | 30" (Mai | in Oven) | | |
| Туре | Multifunction v | with Single Fan | Multifunction with | Dual Convection | | |
| Temperature Regulation | | | Electronic probe | | | |
| OVEN FUNCTIONS | | | | | | |
| | Down Bake | | Down Bake | Broil "Super Nova" | | |
| | Dehydrate | Convection Roast | | Convection Roast | | |
| GAS OVEN FEATURES | Pizza (Lower Convection) | Oven Lights | Pizza (Lower Convection) | Sabbath Mode | | |
| GAS SVERT EXPORES | Electric Flame Ignition | Flame out sensing | Electronic Temp. Control | Flame out sensing | | |
| | Gas safety devices | riame out sensing | <u> </u> | Timing Cooking Functions | | |
| | L.P. Conversion Kit | | Gas safety devices | 12 Hour Clock Formats | | |
| | | | L.P: Conversion Kit | Pizza Function | | |
| OVEN DOOR(S) | | | | | | |
| Oven Glass Window | | ssed Window | Deep Embossed Window | | | |
| Door Cooling System | | stant Glasses | 4 Heat Resis | | | |
| Door Hinges - Soft-closing System Handle Style | | Steady Tilt | Heavy Duty Steady Tilt Stainless Steel Tube Ø30mm, Metal End caps | | | |
| OVEN CAVITY | Stainless Steel Tube Ø | 30mm, Metal End caps | Stainless Steel Tube Ø | summ, ivietal End caps | | |
| Gross Capacity (cbft) | 2 | .7 | 4. | .4 | | |
| Usable Capacity (cbft) | | .4 | 4.1 | | | |
| Cavity Enamel Color | Bla | ack | Black | | | |
| Rack Positions | | 6 | (| | | |
| Oven Lights | 2x20W | Halogen | 3x20W I | Halogen | | |
| BROIL BURNER | 0000 /571 | I/b) 2200\M | 1.4000 /DTU | /b) 4100\M | | |
| Power Natural Gas Power Propane | | J/h) - 2300W U/h) - 2300W | 14000 (BTU 13000 (BTU | | | |
| BAKE BURNER | 0000 (B1) | O/11) - 2000VV | 13000 (610 | 7117 000044 | | |
| Power Natural Gas | 9500 (BTU) | /h) - 2800W | 18000 (BTU | /h) - 5300W | | |
| Power Propane | | /h) - 2800W | | J/h) - 4700 | | |
| OVEN ACCESSORIES | , | , | , | , | | |
| Chrome Racks | 2 | 2 | 2 | | | |
| Enameled Broiler Pan (basin + anti splash) | | - | 1 | | | |
| Telescopic Chrome Rack | | 1 | 1 | <u> </u> | | |
| DIMENSIONS/WEIGHT | 47.0/ | A II | 404 | 2 mm | | |
| Overall dim - Width Overall dim - Height (min - max) | 47 - 3/4 | 4" 8", 38 - 1/4" | 923 mm - 972 | 6 mm 2 mm | | |
| Overall dim - Height (min - max) Overall dim - Depth | 29 - 3/4 | | | mm | | |
| Gross Weight | 529 lbs | | 240 | | | |
| POWER / RATINGS (120 V, 60 HZ) | 320 100 | | 210 | 3 | | |
| Watts / Amps | | 1500 W | - 12.5 A | | | |
| Power Cable | | Nema | 5-15P | | | |
| INSTRUCTIONS FOR USE | | | | | | |
| Use & Care Manual / Installation Manual | | English / Frer | nch / Spanish | | | |
| | | | | | | |

SOFIA

ALL GAS PROFESSIONAL RANGE





| CODE ID | 36" ALL GAS PROF F6PGR | | 30" ALL GAS PROF F6PGR | ESSIONAL RANGE 1304S2 | | |
|---|--|---|--|---------------------------------------|--|--|
| Series | 60 | 0 | 60 | 00 | | |
| Finish | Professional Desig | n - Stainless Steel | Professional Desig | n - Stainless Steel | | |
| CONTROL PANEL | | | | | | |
| Control Type | 8 Heavy D | | 6 Heavy D | | | |
| Display: Temperature - Function | White | | White LED | | | |
| Ignition/Temperature control COOKTOP | Electronic Control (r | nin/max 1/0/550°F) | Electronic Control (min/max 170/550°F) | | | |
| | GAS (NO | Carl D) | CAS (NI | C or LD) | | |
| Type Cooking Surface | Matte Blac | | Matte Blac | G or LP) | | |
| GAS COOKTOP FEATURES | iviatie biac | A LHAITIEI | Watte Black Ename | | | |
| Electric Re-ignition system | | | • | | | |
| Flame-out sensing | | | |) | | |
| Top Mount Injectors | | | | 1 | | |
| L.P. Conversion Kit | • | | • | • | | |
| Dual Crown Brass Burner | • | | • | • | | |
| Heavy Duty Cast Iron Grates | 3 | | 2 | 2 | | |
| Cooking Zones | 6 | i | 4 | 1 | | |
| Burners types | All Dual Flame/Simmer Burner | | All Dual Flame/ | Simmer Burner | | |
| Power Front-L,Front-R (Max/Min) NG | 20000 (BTU/h) - 5900W / 750 (BTU/h) - 220W | | - | • | | |
| Power Front-R (Max/Min) NG | - | | 20000 (BTU/h) - 5900V | | | |
| Power (Max/Min) NG | 18000 (BTU/h) - 5300V | | 18000 (BTU/h) - 5300V | | | |
| Power (Max/Min) LP | 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W | | 15000 (BTU/h) - 4400V | / / 750 (BTU/h) - 220W | | |
| OVEN | | | | | | |
| Type | Gas - Dual | | Gas - Dual | · · · · · · · · · · · · · · · · · · · | | |
| Temperature Regulation | Electronic thermostat control | | Electronic ther | mostat control | | |
| OVEN FUNCTIONS | D- | | Bake | | | |
| - | Bake Broil | | | | | |
| | Broll Pizza | | Broil Pizza | | | |
| GAS OVEN FEATURES | PIZZā | | FIZ | Za | | |
| GAS SVENTEATONES | Electronic Fl | ame Ignition | Electronic FI | ame Ignition | | |
| | Flame-ou | | Flame-ou | | | |
| | Flame-ou | · · | Flame-out Auto-off | | | |
| | Sabbatl | | Sabbath Mode | | | |
| | L.P. Conv | ersion Kit | L.P. Conversion Kit | | | |
| OVEN DOOR(S) | | | | | | |
| Oven Glass Window | Deep Embossed E | xtra Wide Window | Deep Embossed E | xtra Wide Window | | |
| Door Cooling System | 4 Heat Resis | ant Glasses | 4 Heat Resistant Glasses | | | |
| Door Hinges - Soft-closing System | Heavy Duty | | Heavy Duty Steady Tilt | | | |
| Handle Style | Stainless Steel Tube | with Metal End caps | Stainless Steel Tube with Metal End caps | | | |
| OVEN CAVITY | | | | | | |
| Gross Capacity (cbft) | 5. | | 4. | | | |
| Usable Capacity (cbft) | 4. | | 3.6 | | | |
| Cavity Enamel Color | Bla | | Black | | | |
| Rack Positions | 6 | | 6 | | | |
| Oven Lights | 3x20W I | Halogen | 3x20W I | Halogen | | |
| NOVA BROILER SYSTEM BURNER | 4,0000 /PTI | (1) 500014/ | 4 4000 (PTI) | (1) 440014 | | |
| Power (Max) NG | 18000 (BTU | | 14000 (BTU | , | | |
| Power (Max) LP | 17000 (BTU | n) - 5000vv | 13000 (BTU | /n) - 3800vv | | |
| Power (Max) NG | 21500 (BTU | (b) 6300W | 18000 (BTU | /b) 5300W/ | | |
| Power (Max) LP | 21500 (BTU | | 16000 (BTU | , | | |
| OVEN ACCESSORIES | 21300 (B10) | 1) - 030000 | 10000 (B10) | 711) - 470000 | | |
| Chrome Racks | | | 2 |) | | |
| Enameled Broiler Pan (basin + anti splash) | 2 | | 1 | | | |
| Telescopic Chrome Rack | | | 1 | | | |
| DIMENSIONS/WEIGHT | 1 | | | | | |
| | 35 - 3/4" 910 mm | | 29 - 3/4" | 758 mm | | |
| | 35 - 3/4" | 910 mm | | | | |
| Overall dim - Width | | 910 mm 898 mm - 947 mm | | | | |
| Overall dim - Width Overall dim - Height (min - max) | 35 - 3/4" 35 - 3/8", 37 - 1/4" 29 - 3/4" | 910 mm 898 mm - 947 mm 756 mm | 36 - 3/8", 38 - 1/4" 29 - 3/4" | 923 mm - 972 mm | | |
| Overall dim - Width | 35 - 3/8", 37 - 1/4" | 898 mm - 947 mm | 36 - 3/8", 38 - 1/4" | | | |
| Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth | 35 - 3/8", 37 - 1/4" 29 - 3/4" | 898 mm - 947 mm 756 mm | 36 - 3/8", 38 - 1/4" 29 - 3/4" | 923 mm - 972 mm 756 mm | | |
| Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth Gross Weight | 35 - 3/8", 37 - 1/4" 29 - 3/4" | 898 mm - 947 mm 756 mm 171 kg | 36 - 3/8", 38 - 1/4" 29 - 3/4" | 923 mm - 972 mm 756 mm 146 kg | | |
| Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth Gross Weight POWER / RATINGS (120 V, 60 HZ) | 35 - 3/8", 37 - 1/4" 29 - 3/4" 377 lbs | 898 mm - 947 mm 756 mm 171 kg - 5A | 36 - 3/8", 38 - 1/4" 29 - 3/4" 322 lbs | 923 mm - 972 mm 756 mm 146 kg | | |
| Overall dim - Width Overall dim - Height (min - max) Overall dim - Depth Gross Weight POWER / RATINGS (120 V, 60 HZ) Watts / Amps | 35 - 3/8", 37 - 1/4" 29 - 3/4" 377 lbs | 898 mm - 947 mm 756 mm 171 kg - 5A | 36 - 3/8", 38 - 1/4" 29 - 3/4" 322 lbs | 923 mm - 972 mm 756 mm 146 kg | | |





| CODE ID | | DFESSIONAL RANGE 365S1 | 30" INDUCTION PROFESSIONAL RANGE F6PIR304S1 | | | |
|---|--|---|--|---|--|--|
| Series | 6 | 00 | 6 | 00 | | |
| Finish | Professional Design | gn - Stainless Steel | Professional Design | n - Stainless Steel | | |
| CONTROL PANEL | | | | | | |
| Control Type | | Outy Knobs | 6 Heavy Duty Knobs Electronic with 6 Touch Keys | | | |
| Oven Programming Display: Clock - Temperature - Function | | n 6 Touch Keys e LED | | ELED | | |
| Language | | glish | | nch / Spanish | | |
| COOKTOP | | , . | | , этт эрэглэл | | |
| Туре | | CTION | INDUCTION | | | |
| Cooking Surface | Ceram | ic Glass | Cerami | c Glass | | |
| INDUCTION COOKTOP FEATURES | Pot Detection System | Residual Heat Indication | Pot Detection System | Residual Heat Indication | | |
| | Melting Function 113°F / 45°C | Simmering Function 158°F / 70°C (| Melting Function 113°F / 45°C | Simmering Function 158°F / 70°C | | |
| | Digital Display | Booster/Fast Boil | Digital Display | Booster/Fast Boil | | |
| | for Power Level | Function for Each Zone | for Power Level | Function for Each Zone | | |
| | Failure Codes Indication | Power Levels: 1 to 9 | Failure Codes Indication | Power Levels: 1 to 9 | | |
| | Cooling Fan System | Heat up time automatic | Cooling Fan System | Heat up time automatic | | |
| | Child Lock Function Knob for power setting | Digital minute minder | Child Lock Function Knob for power setting | Cooking Zones: 4 | | |
| Burners types (Front-L) - Power (Max/Booster) | Inductor 9" | Cooking Zones: 5 (230 mm) 2300W / 3700W | Inductor 9" | (230 mm) 2300W / 3700W | | |
| Burners types (Rear-L) - Power (Max/Booster) | Inductor 7" | (180 mm) 1850W / 3000W | Inductor 6 - 1/2" | (165 mm) 1400W / 2200W | | |
| Burners types (Center dual circuit) - Power (Max/Booster) | | (280 mm) 3000W / 5500W | - · · · · · · · · · · · · · · · · · · · | - , | | |
| Burners types (Center single circuit) - Power (Max/Booster) | | (180 mm) 1850W / 2600W | | = | | |
| Burners types (Front-R) - Power (Max/Booster) | Inductor 9" | (230 mm) 2300W / 3700W | Inductor 7 - 3/4" | (200 mm) 1850W / 3000W | | |
| Burners types (Rear-R) - Power (Max/Booster) | Inductor 7" | (180 mm) 1850W / 3000W | Inductor 7 - 3/4" | (200 mm) 1850W / 3000W | | |
| OVEN Type | Flectric Self-clean - Dual C | onvection (True Euro Conv.) | Electric Self-clean - Dual Convection (True Euro Conv. | | | |
| Temperature Regulation | | ax 170/550°F - 75/290°C) | Electronic Control (min/max 170/550°F - 75/290°C) | | | |
| OVEN FUNCTIONS | | , | | , | | |
| | Pyrolytic Self-Clean | Broil | Pyrolytic Self-Clean | Broil | | |
| | True Convection | Dehydrate | True Convection | Dehydrate | | |
| | Convection Broil Convection Roast | Thaw (Defrost) Proof (Warm) | Convection Broil Convection Roast | Thaw (Defrost) Proof (Warm) | | |
| | Pizza (Lower Convection) | Keep warm (Warm Plus) | Pizza (Lower Convection) | Keep warm (Warm Plus) | | |
| | Bake | Oven Lights | Bake | Oven Lights | | |
| ELECTRIC OVEN FEATURES | | | | | | |
| | Preset/Last Used | Preheat Indicator | Preset/Last Used | Preheat Indicator | | |
| | Temperature Memory Child Door Lock | (25%, 50%, 75%, 100%) Control Display Lock | Temperature Memory Child Door Lock | (25%, 50%, 75%, 100%) Control Display Lock | | |
| | Automatic Fast Preheat | 12/24 Hour Clock Formats | Fast Preheat | 12/24 Hour Clock Formats | | |
| | Sabbath Mode | Temperature Display °C/°F | Sabbath Mode | Temperature Display °C/°F | | |
| | Meat Probe | | Meat Probe | | | |
| OVEN DOOR(S) | 5 5 1 | 1342 | 5 5 1 15 | | | |
| Oven Glass Window Door Cooling System | | ssed Window stant Glasses | | Extra Wide Window stant Glasses | | |
| Door Hinges - Soft-closing System | | Steady Tilt | | Steady Tilt | | |
| Handle Style | | e Ø30mm, Pro Style | | with Metal End caps | | |
| OVEN CAVITY | | | | | | |
| Gross Capacity (cbft) | | .7 | | .4 | | |
| Usable Capacity (cbft) | | .9 ack | 4.1 Black | | | |
| Cavity Enamel Color Rack Positions | | аск 6 | | | | |
| Oven Lights | | Halogen | 6 3x20W Halogen | | | |
| HEATING ELEMENTS (@240V) | 52011 | | | | | |
| Broil Upper Heating Element | | 500 W | | 500 W | | |
| Upper Auxiliary Element | | 032 W | | 032 W | | |
| Concealed Bake Lower Heating Element Convection Element | | 000 W 300 W | | 000 W 800 W | | |
| OVEN ACCESSORIES | 2 / 1 | 300 ** | 2 / 10 | 500 VV | | |
| | 2 Chrome Racks | 1 Telescopic Chrome Rack | 2 Chrome Racks | 1 Telescopic Chrome Rack | | |
| | 1 Enameled Broiler Pan | | 1 Enameled Broiler Pan | | | |
| DIMENSIONS/WEIGHT | (basin + anti splash) | | (basin + anti splash) | | | |
| Overall dim - Width | 35 - 3/4" | 910 mm | 29 - 3/4" | 758 mm | | |
| Overall dim - Height (min - max) | 35 - 3/8", 37 - 1/4" | 898 mm - 947 mm | 36 - 3/8", 38 - 1/4" | 923 mm - 972 mm | | |
| Overall dim - Depth | 29 - 3/4" | 756 mm | 29 - 3/4" | 756 mm | | |
| Gross Weight | 382 lbs | 174 kg | 311 lbs | 141 kg | | |
| POWER / RATINGS (208/240 V, 60 HZ) | 401344 45.04 (1.15) | Marrian C 1 1 1 1 1 | 4.41.00 | 45.04 | | |
| kW / Amps rating at 120-240V, 60Hz | | Maximum Output Amp.) | | - 45.8A - 48.5A | | |
| kW / Amps rating at 120-208V, 60Hz Power Cable | | Maximum Output Amp.) 14-50P | | - 48.5A 14-50P | | |
| INSTRUCTIONS FOR USE | E 21.75 | anh (On anish | E 81.75 | ash / On anish | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / French / Spanish | | | |

SOFIA

PROFESSIONAL OVEN






| CODE ID | | NAL SINGLE OVEN P30S1 | 30" PROFESSIONAL DOUBLE OVEN F6PDP30S1 | | | |
|--|--------------------------------------|-----------------------------|---|----------------------------------|--|--|
| Series | 6 | 00 | 60 | 00 | | |
| Finish | Professional Desi | gn - Stainless Steel | Professional Design - Stainless Steel | | | |
| CONTROL PANEL | | | ÿ | | | |
| Control Type | 2 Heavy [| Outy Knobs | 2 Heavy D | 2 Heavy Duty Knobs | | |
| Oven Programming | Electronic wit | h 6 Touch Keys | Electronic with | 6 Touch Keys | | |
| Display: Clock - Temperature - Timer | Whit | e LED | White | LED | | |
| Language | En | glish | Eng | lish | | |
| OVEN | | | | | | |
| Туре | | Convection | Dual True C | | | |
| Temperature Regulation | Electronic Control (min/n | nax 170/550°F - 75/290°C) | Electronic Control (min/ma | ax 170/550°F - 75/290°C) | | |
| OVEN FUNCTIONS | Direction Colf Class | Decil | Durch die Colf Class | Due | | |
| | Pyrolytic Self-Clean True Convection | Broil | Pyrolytic Self-Clean True Convection | Broi Dehydrate | | |
| | Convection Bake | Dehydrate Thaw (Defrost) | Convection Bake | Thaw (Defrost | | |
| | Convection Bake Convection Broil | Proof (Warm) | Convection Bake Convection Broil | Proof (Warm | | |
| | Convection Broil Convection Roast | Keep warm (Warm Plus) | | Keep warm (Warm Plus | | |
| | | Oven Lights | Convection Roast Pizza (Lower Convection) | Neep warm (warm Plus Oven Lights | | |
| | Pizza (Lower Convection) Bake | Oven Lights | Bake | Oven Lights | | |
| ELECTRIC OVEN FEATURES | Dake | | Dake | | | |
| ELECTRIC OVEN PEATORES | Preset/Last Used | Preheat Indicator | Preset/Last Used | Preheat Indicato | | |
| | Temperature Memory | (25%, 50%, 75%, 100%) | Temperature Memory | (25%, 50%, 75%, 100% | | |
| | Control Display Lock | Sabbath Mode | Control Display Lock | Sabbath Mode | | |
| | Child Door Lock | Temperature Display °C/°F | Child Door Lock | Temperature Display °C/°F | | |
| | Meat Probe | Temperature Display C/ T | Meat Probe (Upper Oven Only) | | | |
| OVEN DOOR(S) | WeatTibbe | | weat riobe (opper over only) | | | |
| Oven Glass Window | Large See Through Glass | | Large See Th | urough Glass | | |
| Door Cooling System | | stant Glasses | 4 Heat Resis | | | |
| Door Hinges - Soft-closing System | | y Steady Tilt | Heavy Duty Steady Tilt | | | |
| Handle Style | | ar Steel | Tubular Steel | | | |
| OVEN CAVITY | | u. 0.00. | | | | |
| Gross Capacity (cbft) | | 1.4 | 4.4 | | | |
| Usable Capacity (cbft) | | l.1 | 4.1 | | | |
| Cavity Enamel Color | | ack | Black | | | |
| Rack Positions | | 6 | 6 | | | |
| Oven Lights | 3x20W | Halogen | 3x20W Halogen | | | |
| HEATING ELEMENTS (@240V) | | | | | | |
| Broil Upper Heating Element | 3 | 500 W | 3500 W | | | |
| Upper Auxiliary Element | | 032 W | 1032 W | | | |
| Concealed Bake Lower Heating Element | 3 | 000 W | 3000 W | | | |
| Convection Element | 2 x 1 | 300 W | 2 x 1300 W | | | |
| OVEN ACCESSORIES | | | | | | |
| Chrome Racks | | 2 | 2 on bot | h ovens | | |
| Enameled Broiler Pan (basin + anti splash) | | 1 | 1 on both ovens | | | |
| Telescopic Chrome Rack | | 1 | 1 on bot | h ovens | | |
| DIMENSIONS/WEIGHT | | | | | | |
| Overall dim - Width | 29 - 11/16" | 754 mm | 29 - 11/16" | 754 mm | | |
| Overall dim - Height | 27 - 7/8" | 707 mm | 51" | 1295 mm | | |
| Overall dim - Depth | 24" | 610 mm | 24" | 610 mm | | |
| Cut-out - Width | 28 - 7/16" | 722 mm | 28 - 7/16" | 722 mm | | |
| Cut-out - Height (min) | 27 - 3/8" | 696 mm | 50" | 1270 mm | | |
| Cut-out - Depth (min) | 23 - 1/4" | 590 mm | 23 - 1/4" | 590 mm | | |
| Gross Weight | 198 lbs | 90 kg | 340 lbs | 154 kg | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | | | |
| kW / Amps rating at 240V, 60Hz | 3.84 kV | V - 16.9A | 7.68 kW | - 33.8A | | |
| kW / Amps rating at 208V, 60Hz | 3.54 kV | V - 17.5A | 6.48 kW | - 32.4A | | |
| Power Cable | Co | nduit | Con | duit | | |
| INSTRUCTIONS FOR USE | | | | | | |
| | | | | | | |

DATA

TECHNICAL

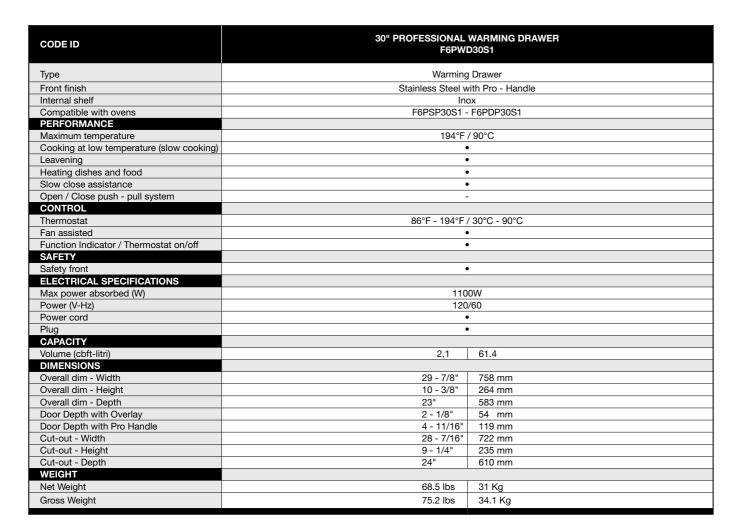



PROFESSIONAL OVEN





| CODE ID | | SPEED OVEN SPD30S1 | 30"SOFIA PRO F6PSC | | | |
|---|-------------|----------------------------|-------------------------------|---------------------------------------|--|--|
| Туре | Microwav | e - Speed Oven | Steam + fa | an assisted | | |
| Finish | Stai | nless steel | Stainle | ss steel | | |
| Temperature Regulation | El | ectronic | Electronic | | | |
| FUNCTIONS | | | | | | |
| Microwave / Steam cook | | •/- | -/ | • | | |
| Steam reheat | | - | • |) | | |
| Microwave / Steam convection | | • | • | • | | |
| Steam clean / circuit | | - | • |) | | |
| 5 minute steam | | - | • | 1 | | |
| Convection bake | | - | • |) | | |
| Convection roast | | • | • | | | |
| Convection broil | | • | • | | | |
| Broil | | • | • | | | |
| Eco convection bake | | - | • | | | |
| Recipes | | • | • | | | |
| Oven Lights | | • | • | | | |
| CONTROL PANEL | MODIII | ND Fleetwer-!- | 110011112 | Fleetveni- | | |
| Control type | | AR - Electronic FT 3.5" | MODULAR TFT | | | |
| Display Menu Recipes | - 11 | 1 3.3 | IFI | 3.3 | | |
| Commands | Dual Eull T | ouch Keyboard | Dual Full Tou | oh Kovboard | | |
| Language | Duai Fuli I | 4 | Dual Full Touch Keyboard | | | |
| SPECIAL FEATURES | 4 | | 4 | | | |
| Manual Fast Preheat | | | <u> </u> | • | | |
| Meat Probe | _ | | • | | | |
| 12/24 hour clock format | • | | • | | | |
| °C/°F | | • | • | | | |
| OVEN DOOR(S) | | | | | | |
| Cool door | | • | | · | | |
| OVEN CPACITY | | | | | | |
| Gross Capacity (cuft) | | 1.2 | 1. | 2 | | |
| Usable Capacity (cuft) | | 1.0 | 1.0 | | | |
| Cavity Enamel Color | Stair | lless Steel | Stainless Steel | | | |
| Rack Positions | 400 | 3 | 3 | | | |
| Oven Lights Broil Upper Heating Element | | W Halogen DW (240V) | 1x20W Halogen 1500W (240V) | | | |
| Steamer | 1300 | - | 1500W (240V) 1500W (240V) | | | |
| Lower Element Wattage | | - | 300W (240V) | | | |
| Convection Element Wattage | 2300 | OW (240V) | 2300W (240V) | | | |
| ACCESSORIES | | | | | | |
| Chrome racks | | 1 | 1 | | | |
| Stainless Steel Tray Telescopic chrome rack | | - | - | | | |
| SIZE | | | | | | |
| Overall dim - width | 29 - 7/8" | 758 mm | 29 - 7/8" | 758 mm | | |
| Overall dim - height | 18 - 5/8" | 473 mm | 18 - 5/8" | 473 mm | | |
| Overall dim - depth | 21" | 533 mm | 21" | 533 mm | | |
| Cutout - width | 25 - 3/4" | 654 mm | 25 - 3/4" | 654 mm | | |
| Cutout - height (min) Cutout - depth (min) | 18" | 458 mm | 18" 22" | 458 mm | | |
| POWER / RATINGS | 22 | 560 mm | 22 | 560 mm | | |
| KW/Amps rating at 240V, 60Hz | 3.4 | (W - 14A | 3.3kW - | - 13.7A | | |
| KW/Amps rating at 208V, 60Hz | | (W - 13A | 2.48kW | | | |
| Microwave input power | | 850 W | - | • | | |
| Microwave output power | | 900 W | - | · · · · · · · · · · · · · · · · · · · | | |
| Frequency | 24 | 50 MHz | - | | | |
| Cable + Conduit | | • | • | | | |
| INSTRUCTION FOR USE | | 00.50 | | D. FD. | | |
| Use & Care Manual / Installation Manual | EN, SP, FR | | EN, S | EN, SP, FR | | |

DATA



| | | | - | |
|---|---|---|---|--|
| • | В | ш | п | |
| • | | | и | |
| | | _ | | |

| CODE ID | 30" PROFESSIONAL BUILT- F7BC24B1 (coffee machine) + | | | | |
|---|--|-----------|--|--|--|
| Туре | Coffee made | chine | | | |
| Finish | Stainless s | steel | | | |
| PERFORMANCE | | | | | |
| Total no. of modes | 30 | | | | |
| Automatic modes | Coffee, Steam, | Hot water | | | |
| Programming | Full touch electonic | | | | |
| Energy efficiency | А | | | | |
| Annual energy consume (kWh) | 45 | | | | |
| Water tank capacity | 60 fl. oz | 1,8 L | | | |
| Coffee container capacity | 7 oz | 200 g | | | |
| Automatic Coffee grinder with 13 levels regulations | • | | | | |
| Cups of coffee nr. | 2 | | | | |
| Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm | • | | | | |
| Retractable dispenser for steam and hot water | • | | | | |
| LED lighting | • | | | | |
| Filter | • | | | | |
| Automatic cleaning program | • | | | | |
| Milk container 25 fl.oz | • | | | | |
| Drip tray | • | | | | |
| Water tank refill warning light | • | | | | |
| ELECTRICAL SPECIFICATION (120V, 60 HZ) | | | | | |
| Max rated power (W) | 1350V | V | | | |
| Pump pressure (bar) | 15 | | | | |
| SIZE | | | | | |
| Overall dim - width | 29 - 7/8" | 758 mm | | | |
| Overall dim - height | 18 - 3/4" | 476 mm | | | |
| Overall dim - depth | 18 - 3/4" | 476 mm | | | |
| Cutout - width | 22" | 560 mm | | | |
| Cutout - height (min) | 18 - 1/4" | 450 mm | | | |
| Cutout - depth (min) INSTRUCTION FOR USE | 28 - 3/8" | 722 mm | | | |
| Use & Care Manual / Installation Manual | EN, SP, | FR | | | |

SOFIA

PROFESSIONAL GAS RANGE TOP



| CODE ID | 48" PROFESSIONAL RANGE TOP F6GRT486GS1 | | | | |
|---|--|---------------------------------------|--|--|--|
| Series and Finish | Professional Design - Stainless Steel | | | | |
| COOKTOP | 1 10165310 | 200.g Ottali 1000 Ottoli | | | |
| Туре | NG - Natu | ral Gas / LP - Liquid Propane | | | |
| Cooking Surface | | Black Enameled | | | |
| GAS COOKTOP FEATURES | | | | | |
| | Electric Re-ignition system | Dual Brass Crown Burners | | | |
| | Flame-out sensing | Flat Griddle | | | |
| | Top Mount Injectors | Pressure Regulator | | | |
| March with arise to arise des | L.P. Conversion Kit | Heavy Duty Cast Iron Grates | | | |
| Knob with minute minder COOKING ZONES | | 6 + Griddle | | | |
| Front Left | | 0 + Griddle | | | |
| Power (Max/ Min) - NG | 20000 /DTI I/h |) - 5850W / 750 (BTU/h) - 220W | | | |
| Power (Max/ Min) - NG Power (Max/ Min) - LP | , | , , | | | |
| Rear Left | 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W | | | | |
| Power (Max/ Min) - NG | 10000 /DTI I/b |) - 5300W / 750 (BTU/h) - 220W | | | |
| ` ' | | · · · · · · · · · · · · · · · · · · · | | | |
| Power (Max/ Min) - LP | 15000 (B10/n |) - 4400W / 750 (BTU/h) - 220W | | | |
| Central Middle "Left" GRIDDLE | | 500 (DTILI) 0070W | | | |
| Power (Max) - NG | 11500 (BTU/h) - 3370W | | | | |
| Power (Max) - LP | 11500 (BTU/h) - 3370W | | | | |
| Front Middle | | | | | |
| Power (Max/ Min) - NG | |) - 5300W / 750 (BTU/h) - 220W | | | |
| Power (Max/ Min) - LP | 15000 (BTU/h |) - 4400W / 750 (BTU/h) - 220W | | | |
| Rear Middle | | | | | |
| Power (Max/ Min) - NG | · · · · · · · · · · · · · · · · · · · |) - 5300W / 750 (BTU/h) - 220W | | | |
| Power (Max/ Min) - LP | 15000 (BTU/h |) - 4400W / 750 (BTU/h) - 220W | | | |
| Front Right | | | | | |
| Power (Max/ Min) - NG | 20000 (BTU/h |) - 5850W / 750 (BTU/h) - 220W | | | |
| Power (Max/ Min) - LP | 15000 (BTU/h |) - 4400W / 750 (BTU/h) - 220W | | | |
| Rear Right | | | | | |
| Power (Max/ Min) - NG | 18000 (BTU/h |) - 5300W / 750 (BTU/h) - 220W | | | |
| Power (Max/ Min) - LP | • |) - 4400W / 750 (BTU/h) - 220W | | | |
| DIMENSION / WEIGHT | | | | | |
| Overall dim - width | 47 - 7/8" | 1216 mm | | | |
| Overall dim - height | 7" | 179 mm | | | |
| Overall dim - depth | 29 - 3/4" | 756 mm | | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | | |
| kW / Amps rating at 120-240V, 60Hz | | 3,2 A | | | |
| Cable + Plug | | Nema 5-15P | | | |
| INSTRUCTIONS FOR USE | _ | F1 /F 1 /O 11 | | | |
| Use & Care Manual / Installation Manual | Eng | lish / French / Spanish | | | |

SOFIA

PROFESSIONAL GAS RANGE TOP





SOFIA

PROFESSIONAL INDUCTION RANGE TOP





| CODE ID | | AL GAS RANGE TOP T366S1 | 30" PROFESSIONAL GAS RANGE TO F6GRT304S1 | | |
|---|-----------------------|----------------------------|---|---------------------|--|
| Series | 6 | 600 | 600 | | |
| Finish | Professional Desi | gn - Stainless Steel | Professional Design | n - Stainless Steel | |
| CONTROL PANEL | | 9 | | | |
| Control Type | 6 Heavy [| Outy Knobs | 4 Heavy D | Outy Knobs | |
| COOKTOP | | | | | |
| Туре | GAS (N | IG or LP) | GAS (N | G or LP) | |
| Cooking Surface | Matte Bla | ack Enamel | Matte Bla | ck Enamel | |
| GAS COOKTOP FEATURES | | | | | |
| Electric Re-ignition system | • | | | • | |
| Flame-out sensing | | • | | • | |
| Top Mount Injectors | | • | | • | |
| Dual Crown Brass Burner | | • | | • | |
| Simmer Plate | Opt | tional | Optional | | |
| Wok Ring | Opt | tional | Optional | | |
| Heavy Duty Cast Iron Grates | 3 | | 2 | | |
| Cooking Zones | | 6 | 4 | 4 | |
| Burners types | All Dual Flame | /Simmer Burner | All Dual Flame/Simmer Burner | | |
| Power Front-L,Front-R (Max/Min) NG | 20000 (BTU/h) - 5900\ | W / 750 (BTU/h) - 220W | - | | |
| Power Front-R (Max/Min) NG | | - | 20000 (BTU/h) - 5900W / 750 (BTU/h) - 220 | | |
| Power (Max/Min) NG | 18000 (BTU/h) - 5300\ | W / 750 (BTU/h) - 220W | 18000 (BTU/h) - 5300W / 750 (BTU/h) - 220V | | |
| Power (Max/Min) LP | 15000 (BTU/h) - 4400\ | W / 750 (BTU/h) - 220W | 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W | | |
| DIMENSIONS/WEIGHT | | | | | |
| Overall dim - Width | 35 - 3/4" | 910 mm | 29 - 3/4" | 758 mm | |
| Overall dim - Height | 7" | 179 mm | 7" | 179 mm | |
| Overall dim - Depth | 29 - 3/4" | 756 mm | 29 - 3/4" | 756 mm | |
| Cut-out - Width | 36" | 914 mm | 30" | 762 mm | |
| Cut-out - Height (min) | 7" | 179 mm | 7" | 179 mm | |
| Cut-out - Depth (min - max) | 24", 25 - 1/2" | 610 mm)- 650 mm | 24", 25 - 1/2" | 610 mm - 650 mm | |
| Gross Weight | 121 lbs | 55 kg | 100 lbs | 45 kg | |
| POWER / RATINGS (120 V, 60 HZ) | | | | | |
| Amps | 0. | .1A | | 1A | |
| Power Cable | Nema | a 5-15P | Nema | 5-15P | |
| INSTRUCTIONS FOR USE | | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Frer | nch / Spanish | |

| CODE ID | 36" PROFESSIONAL INDUCTION RANGE TOP F6IRT365S1 | | | | 30" PROFESSIONAL INDUCTION RANGE TOP F6IRT304S1 | | | ANGE TOP |
|--|--|--------------|---------------|---------------|--|-----------------|----------------|----------------|
| Series | | 6 | 00 | | 600 | | | |
| Finish | Professional Design - Ceramic and Stainless Steel | | | | Profession | nal Design - Ce | eramic and Sta | inless Steel |
| CONTROL PANEL | | | | | | | | |
| Control Type | 6 Heavy Duty Knobs | | | | | 4 Heavy [| Outy Knobs | |
| COOKTOP | | | | | | | | |
| Type | | INDU | CTION | | | INDU | CTION | |
| Cooking Surface | | Ceram | ic Glass | | | Ceram | ic Glass | |
| INDUCTION COOKTOP FEATURES | | | | | | | | |
| Pot Detection System | | | • | | | | • | |
| Child Lock Function | | | • | | | | • | |
| Failure Codes Indication | | | • | | | | • | |
| Knob for Power Setting (illuminated) | | | • | | | | • | |
| Power Levels | | 11 | to 9 | | | 1 1 | to 9 | |
| Digital Display for Power Level | | | • | | | Opt | tional | |
| Melting Function 113°F / 45°C | | | • | | | · | 2 | |
| Warming Function 158°F / 70°C | • | | | 4 | | | | |
| Booster/Fast Boil Function for Each Zone | • | | | • | | | | |
| Automatic Heat-up Time | • | | | • | | | | |
| Residual Heat Indication | | | • | | • | | | |
| Cooking Zones | | | 5 | | | | 4 | |
| Burners types (Front-L/Front-R) - | Inductor 9" | | (230 mm) | 2300W / 3700W | Inductor | 9" | (230 mm) | 2300W / 3700V |
| Power (Max/Booster) | inductor 9 | | (230 11111) | 2300W / 3700W | muuctoi | <u> </u> | (230 11111) | 230000 / 37000 |
| Burners types (Rear-L/Rear R) - Power (Max/Booster) | Inductor 7" | | (180 mm) | 1850W / 3000W | Inductor | 6 -1/2" | (165 mm) | 1400W / 2200V |
| Burners types (Inner Middle) - Power (Max/Booster) | Inductor 7" | | (180 mm) | 1850W / 2600W | - | - | - | - |
| Burners types (Outer Middle) - Power (Max/Booster) | Inductor 11 | | (280 mm) | 3000W / 5500W | Inductor | 7 - 3/4" | (200 mm) | 1850W / 3000V |
| DIMENSIONS/WEIGHT | | | | | | | | |
| Overall dim - Width | 35 | - 3/4" | 910 mm | | | 29 -3/4" | 758 mm | |
| Overall dim - Height | 7" | - O, . | 179 mm | | | 7" | 179 mm | |
| Overall dim - Depth | 29 | -3/4" | 756 mm | | | 29 -3/4" | 756 mm | |
| Cut-out - Width | 36' | | 916 mm | | | 30" | 762 mm | |
| Cut-out - Height (min) | 7" | | 179 mm | | | 7" | 179 mm | |
| Cut-out - Depth (min - max) | | ', 25 - 3/8" | 610 - 644 mm | 1 | | 24", 25 - 1/2" | | |
| Gross Weight | 96 | , | 43.5 kg | | | 79 lbs | 36 kg | |
| POWER / RATINGS (120 V, 60 HZ) | | | | | | | | |
| kW / Amps rating at 240V, 60Hz | | 10.80 k | :W - 45A | | | 7.2 kV | V - 30A | |
| kW / Amps rating at 208V, 60Hz | | 9.80 k | W - 47A | | | | _ | |
| Power Cable | | Coi | nduit | | | Coi | nduit | |
| INSTRUCTIONS FOR USE | | | | | | | | |
| Use & Care Manual / Installation Manual | E | nglish / Fre | nch / Spanish | | | English / Fre | nch / Spanish | |


PROFESSIONAL PRO GAS COOK TOP



| CODE ID | 36" PROFESSIONAL PRO GAS COOK TOP F6PGK365S1 | |
|--|---|-----------------|
| Series | 600 | |
| Finish | Stainless Steel | |
| CONTROL PANEL | | |
| Control Type | Knobs | |
| СООКТОР | | |
| Type | GAS (NG or LP) | |
| Cooking Surface | Matte Black Enamel | |
| GAS COOKTOP FEATURES | | |
| Electric Re-ignition system | • | |
| Flame-out sensing | • | |
| Dual Crown Brass Burner | • | |
| Simmer Plate | Optional | |
| Small Pot Insert (for single burners only) | Optional | |
| Wok Ring (for dual burner only) | Optional | |
| Heavy Duty Cast Iron Grates | 3 | |
| Cooking Zones | 5 | |
| Brass Burners types | All Brass Dual Flame/Simmer Burner | |
| Power (Max/Min) (Front-L) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Rear-L) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Front Center) | 20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W | |
| Power (Max/Min) (Rear-R) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Front-R) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| DIMENSIONS/WEIGHT | | |
| Overall dim - Width | 36" | 914 mm |
| Overall dim - Height | 3 - 7/16" | 87 mm |
| Overall dim - Depth | 21" | 533 mm |
| Cut-out - Width (min - max) | 34 - 1/2" , 34 - 11/16" | 876 mm - 881 mm |
| Cut-out - Height (min) | 3 - 3/8" | 87 mm |
| Cut-out - Depth (min - max) | 19 - 9/16" , 19 - 3/4" | 497 mm - 502 mm |
| Gross Weight | 73 lbs | 33.2 kg |
| POWER / RATINGS (120 V, 60 HZ) | | |
| Amps | 0.1A | |
| Max Power | 80000 (BTU/h) - 23480W | |
| Power Cable | Nema 5-15P | |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | |

SOFIA

PROFESSIONAL PRO GAS COOK TOP



| CODE ID | 30" PROFESSIONAL PRO GAS COOK TOP F6PGK305S1 | |
|--|---|-----------------|
| Series | 600 | |
| Finish | Stainless Steel | |
| CONTROL PANEL | | |
| Control Type | Knobs | |
| COOKTOP | | |
| Туре | GAS (NG or LP) | |
| Cooking Surface | Matte Black Enamel | |
| GAS COOKTOP FEATURES | | |
| Electric Re-ignition system | • | |
| Flame-out sensing | • | |
| Dual Crown Brass Burner | • | |
| Simmer Plate | Optional | |
| Small Pot Insert (for single burners only) | Optional | |
| Wok Ring (for dual burner only) | Optional | |
| Heavy Duty Cast Iron Grates | 2 | |
| Cooking Zones | 5 | |
| Burners types | All Brass Dual Flame/Simmer Burner | |
| Power (Max/Min) (Front-L) | 8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Rear-L) | 10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W | |
| Power (Max/Min) (Center) | 20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W | |
| Power (Max/Min) (Rear-R) | 10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W | |
| Power (Max/Min) (Front-R) | 8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W | |
| DIMENSIONS/WEIGHT | , | , |
| Overall dim - Width | 30" | 762 mm |
| Overall dim - Height | 3 - 7/16" | 87 mm |
| Overall dim - Depth | 21" | 533 mm |
| Cut-out - Width (min - max) | 28" - 1/2 , 28" - 11/16 | 724 mm - 729 mm |
| Cut-out - Height (min) | 3 - 3/8" | 87 mm |
| Cut-out - Depth (min - max) | 19" - 9/16 , 19" - 3/4 | 497 mm - 502 mm |
| Gross Weight | 61 lbs | 27.5 kg |
| POWER / RATINGS (120 V, 60 HZ) | | <u> </u> |
| Amps | 0.1A | |
| Max Power | 57000 (BTU/h) - 16730W | |
| Power Cable | Nema 5-15P | |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | |

36" DUAL FUEL PROFESSIONAL RANGE



| CODE ID | F4PDF366S1 - 36" DUAL FUEL PROFESSIONAL RANGE | | |
|--|--|--|--------------------------|
| Series and Finish | 400 Series - Professional Design - Stainless Steel | | |
| CONTROL PANEL | | - | |
| Control Type | | Electronic | |
| Display: Clock - Temperature - Function | White LED | | |
| COOKTOP | | D. 15 11 | |
| Cooking Surface | | Black Enameled | |
| Type GAS COOKTOP FEATURES | | GAS (NG or LP) | |
| GAS COOKTOF FEATURES | Electric Flame Ignition and | | |
| | Re-ignition | L.P. Conversion Kit | Top Mount Injectors |
| | Flame-out sensing | Dual Crown Aluminum Burner | Pressure Regulator |
| Cooking Zones | | 6 | |
| Burners types | | Dual Flame/Rapid Burners | |
| Power Front L+R (Max/Min) G20-5" (NG) | | 0 (BTU/h) - 5300W / 750 (BTU/h) - | |
| Power Rear L+R (Max/Min) G20-5" (NG) | | 0 (BTU/h) - 4400W / 2200 (BTU/h) - | |
| Power Front Middle (Max/Min) G20-5" (NG) | | 0 (BTU/h) - 4400W / 2200 (BTU/h) - | |
| Power Rear Middle (Max/Min) G20-5" (NG) Power Front L+R (Max/Min) G31-10" (LP) | | 0 (BTU/h) - 5300W / 750 (BTU/h) - 0 (BTU/h) - 4400W / 750 (BTU/h) - | |
| Power Rear L+R (Max/Min) G31-10" (LP) | | 0 (BTU/h) - 3500W / 2200 (BTU/h) - | |
| Power Front Middle (Max/Min) G31-10" (LP) | | 0 (BTU/h) - 3800W / 2200 (BTU/h) - | |
| Power Rear Middle (Max/Min) G31 - 10" (LP) | | 0 (BTU/h) - 4400W / 750 (BTU/h) - | |
| OVEN | | Electric Pyro | |
| Oven Type | N | Iultifunction 2 Fans (True Euro Conv | .) |
| Temperature Regulation | | Electronic | |
| OVEN FUNCTIONS | | | |
| | Pyrolytic Self-Clean with | Pizza (Lower Convection) | Proof (Warm) |
| | automatic door latch True European Convection | , | , , |
| | Bake (Multi level) | Bake | Broil |
| | Dehydrate | Thaw (Defrost) | Convection Broil |
| | Convection Roast | Oven Lights | Keep warm (Warm Plus) |
| | Fast Preheat | 5 | , , |
| ELECTRIC OVEN FEATURES | | | |
| | Preset/Last Used | Preheat bar | Automatic Fast Preheat |
| | Temperature Memory | (25%, 50%, 75%, 100%) | Automatic Last Freneat |
| | Child Door Lock | Sabbath Mode | Hour Clock Formats AM/PM |
| | °F Degree unit | | |
| OVEN DOOR(S) | | 5 5 1 11/2 1 | |
| Oven Glass Window Door Cooling System | | Deep Embossed Window 4 Pane Heat Resistant Glasses | |
| Door Hinges | | Heavy Duty Steady Tilt | |
| Handle Style | Stainle | ess Steel Tube d30mm with Metal ter | minals |
| OVEN CAVITY | Stanne | de eteci idee decimii wiii Media tei | Time Co |
| Net Capacity (cbft) | | 5.7 | |
| Cavity Enamel Color | | Black | |
| Rack Positions | | 6 | |
| Oven Lights | | 3x20W Halogen | |
| HEATING ELEMENTS (@240V) | | | |
| Broil Upper Heating Element | | 3500 W | |
| Upper Auxiliary Element Wattage | 1032 W | | |
| Concealed Bake Lower Heating Element Convection Element | | 3000 W 2 x 1300 W | |
| OVEN ACCESSORIES | | 2 X 1300 W | |
| Chrome Racks | | 2 | |
| Enameled Grill set (basin + anti splash) | 1 | | |
| Telescopic Chrome Rack | Only as optional ACCESSORY | | |
| Meat Probe | Only as optional ACCESSORY | | |
| DIMENSIONS/WEIGHT | | | |
| Overall dim - Width | 35 - 3/4" 910 mm | | |
| Overall dim - Height (min - max) | 35 - 3/8", 37 - 1/4" 898 mm - 947 mm | | |
| Overall dim - Depth | 29 - 3/4" 756 mm | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | 0.041111 40.00 | |
| kW / Amps rating at 120-240V, 60Hz | | 3.84 kW - 16.9 A | |
| kW / Amps rating at 120-208V, 60Hz Power Cable | | 3.54 kW - 17.5 A Nema 14-50P | |
| INSTRUCTIONS FOR USE | | NGIIIQ 14-JUF | |
| | | | |
| Use & Care Manual / Installation Manual | | English / French / Spanish | |

ACCENTO

30" DUAL FUEL PROFESSIONAL RANGE



| CODE ID | F4PDF304S1 - 30" DUAL FUEL PROFESSIONAL RANGE | | |
|--|--|--|----------------------------|
| Series and Finish | 400 Series - Professional Design - Stainless Steel | | |
| CONTROL PANEL | 100 CONTROL TROISCONTIAN DESCRIPTION CREATER CONTROL CREATER CONTROL CREATER C | | |
| Control Type | 6 Heavy Duty Knobs | | |
| Display: Clock - Temperature - Function | | White LED | |
| COOKTOP | | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | |
| Cooking Surface | | Black Enameled | |
| Type | | GAS (NG or LP) | |
| GAS COOKTOP FEATURES | | 3. 10 (1.13. 3. 2.) | |
| | Electric Flame Ignition and Re-ignition | L.P. Conversion Kit | Top Mount Injectors |
| | Flame-out sensing | Dual Crown Aluminum Burner | Pressure Regulator |
| Cooking Zones | January J | 4 | 1 |
| Burners Type | | Rapid Burner | |
| Power Front-L, Rear-R (Max/Min) G20 - 5" (NG) | 15000 |) (BTU/h) - 4400W / 2200 (BTU/h) - 6 | 645 W |
| Power Rear-L, Front-R (Max/Min) G20 - 5" (NG) | 18000 |) (BTU/h) - 5300W / 750 (BTU/h) - 2 | 20 W |
| Power Front-L, Rear-R (Max/Min) G31 - 10" (LP) | |) (BTU/h) - 3500W / 2200 (BTU/h) - 6 | |
| Power Rear-L, Front-R (Max/Min) G31 - 10" (LP) | 15000 |) (BTU/h) - 4400W / 750 (BTU/h) - 2 | 20 W |
| OVEN | | Electric Pyro | |
| Type | | Multifunction 2 Fans | |
| Temperature Regulation | | Electronic | |
| OVEN FUNCTIONS | | | |
| | Pyrolytic Self-Clean with automatic door latch | Pizza (Lower Convection) | Proof (Warm) |
| | True European Convection Bake (Multilevel) | Bake | Broil |
| | Dehydrate | Thaw (Defrost) | Convection Broil |
| | Convection Roast | Oven Lights | Keep warm (Warm Plus) |
| ELECTRIC OVEN FEATURES | | | |
| | Preset/Last Used | Preheat Indicator | Automatic Fast Preheat |
| | Temperature Memory | (25%, 50%, 75%, 100%) | Automatic Last Fleneat |
| | Child Door Lock | Sabbath Mode | Hour Clock Formats AM / PM |
| | °F Degree unit | | |
| OVEN DOOR(S) | | | |
| Oven Glass Window | | Deep Embossed Window | |
| Door Cooling System | | 4 Pane Heat Resistant Glasses | |
| Door Hinges | | Heavy Duty Steady Tilt | |
| Handle Style | Stainle | ess Steel Tube d30mm with Metal ter | minals |
| OVEN CAVITY | | | |
| Net Capacity (cbft) | | 4.4 | |
| Cavity Enamel Color | | Black | |
| Rack Positions | | 6 | |
| Oven Lights | | 3x20W Halogen | |
| HEATING ELEMENTS (@240V) | | 0500 M (040) 0 | |
| Broil Upper Heating Element | | 3500 W (240V) | |
| Upper Auxiliary Element Wattage Concealed Bake Lower Heating Element | | 1032 W (240V) 3000 W (240V) | |
| Concedied Bake Lower Heating Element Convection Element | | 2 x 1300 W (240V) | |
| OVEN ACCESSORIES | | 2 X 1300 W (240V) | |
| Chrome Racks | | 2 rack without frontal bend | |
| Enameled Grill set (basin + anti splash) | | | |
| Telescopic Chrome Rack | 1 Only as antional ACCESSORY | | |
| Meat Probe | Only as optional ACCESSORY Only as optional ACCESSORY | | |
| DIMENSIONS/WEIGHT (In or Lbs) | | Only as optional ACCLOSON1 | |
| Overall dim - Width | 20. 2 | /4" | 58 mm |
| Overall dim - Height (min - max) | 29 - 3/4" 758 mm 39" 993 mm | | |
| Overall dim - Depth | 39" 993 mm 29 - 3/4" 756 mm | | |
| POWER / RATINGS (208/240 V, 60 HZ) | 29-3 | 7 1 | OO HIIII |
| kW / Amps rating at 120-240 V, 60 Hz | | 3.84 kW - 16.9Amps | |
| kW / Amps rating at 120-240V, 60Hz | | 3.54 kW - 10.9Amps | |
| Power Cable | | Nema 14-50P | |
| INSTRUCTIONS FOR USE | | 14011lu 14-001 | |
| Use & Care Manual / Installation Manual | | English / French / Spanish | |
| OSE & Gale Ivialiual / Ilistaliation Ivialiual | | English / French / Spanish | |



| CODE ID | F4PGR366S2 - 36" ALL GAS PROFESSIONAL RANGE | | | | |
|--|--|--|--|----------------------------|--|
| Series and Finish | 400 Series - Professional Design - Stainless Steel | | | | |
| CONTROL PANEL | | 400 Octios 1 fotossional Design Stalliness Oteol | | | |
| Control Type | Valve | | | | |
| Clock Display | | • | | | |
| COOKTOP | | | | | |
| Cooking Surface | | Matte Black | Enameled | | |
| Туре | | GAS (NG | or LP) | | |
| GAS COOKTOP FEATURES | | | | | |
| | Electric Flame and Re-ignition | Top Mount | | Dual Crown Aluminum Burner | |
| | Flame-out sensing | L.P. Conve | | Pressure Regulator | |
| Heavy Duty Cast Iron Grates | | 3 | | | |
| Cooking Zones | | 6 | | | |
| Burners types | 1000 | Dual Flame/Ra | <u>. </u> | 000111 | |
| Power Front L+R (Max/Min) G20 - 5" (NG | | 0 (BTU/h) - 5300W | | | |
| Power Rear L+R (Max/Min) G20 - 5" (NG | | 0 (BTU/h) - 4400W | | | |
| Power Front Middle (Max/Min) G20 - 5" (NG | | 0 (BTU/h) - 4400W | | | |
| Power Rear Middle (Max/Min) G20 - 5" (NG | | 0 (BTU/h) - 5300W | | | |
| Power Front L+R (Max/Min) G31 - 10" (LP) | | 0 (BTU/h) - 4400W | | | |
| Power Rear L+R (Max/Min) G31 - 10" (LP) Power Front Middle (Max/Min) G31 - 10" (LP) | | 0 (BTU/h) - 3500W 0 (BTU/h) - 3500W | | | |
| Power Front Middle (Max/Min) G31 - 10" (LP) Power Rear Middle (Max/Min) G31 - 10" (LP) | | 0 (BTU/h) - 4400W | | | |
| OVEN | 1900 | U (BTU/II) - 4400VV | / /30 (BTO/II) - | - 22000 | |
| Type | | Multifunction 2 Fans | (True Furo Conv | 1 | |
| Temperature Regulation | ' | Therm | |) | |
| Injection Oven | | T-Ze | | | |
| OVEN FUNCTIONS | | 120 | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | |
| STERT SHOTISHS | Down Bake | Bro | oil | | |
| GAS OVEN FEATURES | | | | | |
| | Electronic Flame Ignition | Gas safety | devices | L.P. Conversion Kit | |
| | Flame-out Sensing | | | | |
| OVEN DOOR(S) | | | | | |
| Oven Glass Window | | Deep Embos | | | |
| Door Cooling System | | 4 Pane Heat Res | | | |
| Door Hinges | | Heavy Duty | | | |
| Handle Style | Stai | nless Steel Tube d3 | 0mm, Metal term | inals | |
| OVEN CAVITY | | | | | |
| Gross Capacity (cbft) | | 5.7 | | | |
| Cavity Enamel Color | | Blac | CK | | |
| Rack Positions Oven Lights | | 6 3x20W H | lalagan | | |
| BOTTOM BURNER | | 3X2UW F | laiogen | | |
| Power (Max) G20 - 5" | | 21500 (BTU/ | h) - 6300W | | |
| Power (Max) G20 - 5 Power (Max) G31 - 10" | | 21500 (BTU/ | | | |
| GRILL BURNER | | 21300 (010/ | , 00000 | | |
| Power (Max) NG | | 18000 (BTU/ | h) - 5300W | | |
| Power (Max) LP | | 17000 (BTU/ | | | |
| OVEN ACCESSORIES | 17000 (BTO/II) • 3000¥¥ | | | | |
| Chrome Racks | 2 racks without frontal bend | | | | |
| Enameled Grill set (basin + anti splash) | 1 | | | | |
| Telescopic Chrome Rack | only as optional ACCESSORY | | | | |
| DIMENSIONS/WEIGHT | | | | | |
| Overall dim - Width | 29 - 3/4" 758 mm | | | | |
| Overall dim - Height (min - max) | 35 - 3/8", 37 - 1/4" 898 mm - 947 mm | | | | |
| Overall dim - Depth | 29 - 3/4" 756 mm | | | 56 mm | |
| POWER / RATINGS (120 V, 60 HZ) | | | | | |
| KW/Amps rating rating at 120V, 60Hz | | 600W - 5A | | | |
| Cable + Plug | | Nema 5 | 5-15P | | |
| INSTRUCTIONS FOR USE | | | | | |
| Use & Care Manual / Installation Manual | | English / French | ch / Spanish | | |

ACCENTO

30" ALL GAS PROFESSIONAL RANGE



| CODE ID | F4PGR304S2 - 30" ALL GAS PROFESSIONAL RANGE | | | |
|---|--|--|----------------------------|--|
| Series and Finish | 400 Series - Professional Design - Stainless Steel | | | |
| CONTROL PANEL | J. Committee of the com | | | |
| Control Type | Valve | | | |
| Commands | | 2 Knobs | | |
| COOKTOP | | | | |
| Cooking Surface | | Matte Black Enameled | | |
| Туре | | GAS (NG or LP) | | |
| GAS COOKTOP FEATURES | | , | | |
| | Electric Flame and Re-ignition | Top Mount Injectors | Dual Crown Aluminum Burner | |
| | | L.P. Conversion Kit | | |
| | Flame-out sensing | | Pressure Regulator | |
| Heavy Duty Cast Iron Grates Cooking Zones | | 2 4 | | |
| Burners types | | Dual Flame/Rapid Burners | | |
| | 1500 | 0 (BTU/h) - 4400W / 2200 (BTU/h) - 0 | C 4 E \ N / | |
| Power Front-L,Rear-R (Max/Min) G20 - 5" (NG) Power Rear-L,Front-R (Max/Min) G20 - 5" (NG) | | 0 (BTU/h) - 4400W / 2200 (BTU/h) - 3 | | |
| Power Front-L, Rear-R (Max/Min) G31 - 10" (LP) | | 0 (BTU/h) - 3500W / 730 (BTU/h) - 2 | | |
| Power Rear-L,Front-R (Max/Min) G31 - 10" (LP) | | 0 (BTU/h) - 3300W / 2200(BTU/h) - 3 0 (BTU/h) - 4400W / 750 (BTU/h) - 3 | | |
| OVEN | 1300 | 0 (B10/II) - 4400W / 730 (B10/II) - A | 22000 | |
| Type | Λ | Multifunction 2 Fans (True Euro Conv | 1 | |
| Temperature Regulation | יו | Thermostat | •) | |
| Injection Oven | | T-Zero | | |
| OVEN FUNCTIONS | I-Zero | | | |
| OVER TOROTIONS | Down Bake Broil | | | |
| GAS OVEN FEATURES | Down Banc | <u> </u> | | |
| CALC OVER TEATIONES | Electronic Flame Ignition | Gas safety devices | L.P. Conversion Kit | |
| | | das salety devices | L.F. CONVERSION KIL | |
| OVEN DOOR(S) | Flame-out Sensing | | | |
| OVEN DOOR(S) Oven Glass Window | | Deep Embossed Window | | |
| Door Cooling System | | | | |
| Door Cooling System Door Hinges | 4 Pane Heat Resistant Glasses Heavy Duty Steady Tilt | | | |
| Handle Style | Stainle | ess Steel Tube d30mm with Metal ter | minala | |
| OVEN CAVITY | Stairlie | ess steel tube usonim with Metal tel | IIIIIais | |
| Gross Capacity (cbft) | | 4.4 | | |
| Cavity Enamel Color | | Black | | |
| Rack Positions | | 6 | | |
| Oven Lights | | 3x20W Halogen | | |
| BOTTOM BURNER | | CAZOTT Halogon | | |
| Power (Max) G20 - 5" | | 18000 (BTU/h) - 5300W | | |
| Power (Max) G31 - 10" | | 16000 (BTU/h) - 4700W | | |
| GRILL BURNER | | | | |
| Power (Max) NG | | 14000 (BTU/h) - 4102W | | |
| Power (Max) LP | | 13000 (BTU/h) - 3800W | | |
| OVEN ACCESSORIES | | | | |
| Chrome Racks | | 2rack without frontal bend | | |
| Enameled Grill set (basin + anti splash) | 1 | | | |
| Telescopic Chrome Rack | only as optional ACCESSORY | | | |
| Meat probe | only as optional ACCESSORY | | | |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 29 - 3/4" 758 mm | | | |
| Overall dim - Height (min - max) | 39" 993 mm | | | |
| Overall dim - Depth | 29 - 3/ | /4" 7: | 56 mm | |
| POWER / RATINGS (120 V, 60 HZ) | | | | |
| KW/Amps rating rating at 120V, 60Hz | | 600W - 5A | | |
| Cable + Plug | | Nema 5-15P | | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | | English / French / Spanish | | |
| | English / French / Spanish | | | |

PROFESSIONAL HOOD





| CODE ID | 48" PROFESSIONAL HOOD F6PH48DS1 | | | SIONAL HOOD 136DS1 |
|---|------------------------------------|----------------------|--------------------------|-----------------------|
| Series | 6 | 600 | 6 | 600 |
| Finish | Professional Desi | gn - Stainless Steel | Professional Desi | gn - Stainless Steel |
| CONTROL PANEL | | | | |
| Control Type | 4 speed med | chanical control | 4 speed med | hanical control |
| PERFORMANCES | | | | |
| Output (CFM) | 1 | 000 | 10 | 000 |
| Sound Level (dB) | | 75 | | 75 |
| Motor | Twin Motor | | Twin Motor | |
| Venting Type | Ducted and | recirculating | Ducted and recirculating | |
| FEATURES | | | | |
| Filter Style | Pro Baffle | | Pro | Baffle |
| Lighting | 6 x 1.2W LED | | 4 x 1.2 | 2W LED |
| Single duct diameter | 7 - 7/8" | 200 mm | 7 - 7/8" | 200 mm |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 47 - 7/8" | 1216 mm | 35 - 7/8" | 910 mm |
| Overall dim - Height | 18" | 460 mm | 18" | 460 mm |
| Overall dim - Depth | 24" | 610 mm | 24" | 610 mm |
| Gross Weight | 90 lbs | 41 kg | 70 lbs | 30 kg |
| POWER / RATINGS (115 V, 60 HZ) | | | | |
| Watts / Amps | 540W - 4.70A | | 540W - 4.70A | |
| Power Cable | Nema 5-15P | | Nema | a 5-15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | ench / Spanish | English / Fre | ench / Spanish |

SOFIA

PROFESSIONAL HOOD

290 FULGOR MILANO





| CODE ID | 36" PROFESSIONAL HOOD F6PH36S1 | | 30" PROFESS F6PH30S1 - | |
|---|-----------------------------------|----------------------|---|---------------------|
| Series | 6 | 00 | 60 | 00 |
| Finish | Professional Design | gn - Stainless Steel | Professional Desig | n - Stainless Steel |
| CONTROL PANEL | | | | |
| Control Type | 4 speed mec | hanical control | 4 speed mech Knob Control | |
| PERFORMANCES | | | | |
| Output (CFM) | 6 | 00 | 60 | 00 |
| Sound Level (dB) | - 7 | 72 | 7: | |
| Motor | | ne | One | |
| Venting Type | Ducted and | recirculating | Ducted and recirculating | |
| FEATURES | | | | |
| Filter Style | Pro Baffle | | Pro Baffle | |
| Lighting | 2 x 1.2W LED | | 2 x 1.2W LED 4 x 1.2W LED (F6PH30S2) | |
| Duct diameter | 5 - 15/16" | 150 mm | 5 - 15/16" | (150 mm) |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 35 - 7/8" | 910 mm | 29 - 13/16" | 760 mm |
| Overall dim - Height | 18" | 460 mm | 18" | 460 mm |
| Overall dim - Depth | 24" | 610 mm | 24" | 610 mm |
| Gross Weight | 70 lbs | 30 kg | 61 lbs | 28 kg |
| POWER / RATINGS (115 V, 60 HZ) | | | | - |
| Watts / Amps | 430W - 3.8A | | 430W | - 3.8A |
| Power Cable | Nema 5-15P | | Nema | 5-15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Frer | nch / Spanish |

SOFIA

PROFESSIONAL HOOD





| CODE ID | | MNEY HOOD 48DS1 | F6PC36DS1 - 36" PF | RO CHIMNEY HOOD |
|---|---------------------|---------------------|---------------------|---------------------|
| Series and Finish | Professional Design | n - Stainless Steel | Professional Design | n - Stainless Steel |
| CONTROL PANEL | | | | |
| Control Type | 3 Contro | ol Knobs | 3 Contro | l Knobs |
| PERFORMANCES | | | | |
| Output (CFM) | 10 | 00 | 10 | 00 |
| Sound Level (dB) | 7 | 5 | 7 | 5 |
| Motor | Twin | Motor | Twin | Motor |
| FEATURES | | | | |
| Filter Style | Pro Baffle | | Pro Baffle | |
| Lighting | 6 x 1.2W LED | | 4 x 1.2W LED | |
| Duct dimension (width x depth) | 18" x 12" | 457 x 305 mm | 18" x 12" | 457 x 305 mm |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 48' | 1219 mm | 36' | 914 mm |
| Overall dim - Height | 40-13/16" | 1037 mm | 40-13/16" | 1037 mm |
| Overall dim - Depth | 24" | 610 mm | 24" | 610 mm |
| Gross Weight | 100 lbs | 45 kg | 86 lbs | 39 kg |
| POWER / RATINGS (120 V, 60 HZ) | | | | |
| Watts | 54 | 0W | 54 | DW W |
| Power Cable | Nema 5-15P | | Nema | 5-15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Frer | nch / Spanish |

SOFIA

PROFESSIONAL HOOD





| CODE ID | 48" PROFESSIONA F6BP4 | | 36" PROFESSIONA F6BP34 | | |
|---|--------------------------|--------------------|---------------------------|-------------------|--|
| Series | 60 | 0 | 600 | ı | |
| Finish | Stainles | s Steel | Stainless | Steel | |
| CONTROL PANEL | | | | | |
| Control Type | 3 knobs +4 speed n | nechanical control | 3 knobs +4 speed m | echanical control | |
| PERFORMANCES | • | | | | |
| Output (CFM) | 100 | 00 | 1000 |) | |
| Sound Level (dB) | 75 | 5 | 75 | | |
| Motor | Dual M | Notor | Dual M | otor | |
| Venting Type | Duct | ted | Ducted | | |
| FEATURES | | | | | |
| Filter Style | Pro B | affle | Pro Baffle | | |
| Lighting | 6 x 1.2V | V LED | 4 x 1.2W | 4 x 1.2W LED | |
| Duct diameter for each motor | 8" | 203.2 mm | 8" | 203.2 mm | |
| DIMENSIONS/WEIGHT | · | | | | |
| Overall dim - Width | 45 - 3/4" | 116 mm | 34 - 1/4" | 87 mm | |
| Overall dim - Height | 13 - 1/8" | 33 mm | 13 - 1/8" | 33 mm | |
| Overall dim - Depth | 18 - 1/2" | 47 mm | 18 - 1/2" | 47 mm | |
| Cut-out (w x d) | 43 - 7/16" x 16 - 1/2" | 1092 x 419 mm | 32 - 1/16" x 16 - 1/2" | 814 x 419 mm | |
| Gross Weight | 68 lbs | 31 kg | 60 lbs | 27 kg | |
| Net Weight | 57 lbs | 26 kg | 51 lbs | 23 kg | |
| POWER / RATINGS (115 V, 60 HZ) | | | | | |
| Watts / Amps | 540W - 4.70A | | 540W - 4 | 1.70A | |
| Power Cable | Nema 5-15P | | Nema 5 | -15P | |
| INSTRUCTIONS FOR USE | | | | <u> </u> | |
| Use & Care Manual / Installation Manual | English / Frend | ch / Spanish | English / Frenc | h / Spanish | |

SOFIA

PROFESSIONAL FRIDGE BUILT-IN FRIDGE





| CODE ID | F7PBM36S1-L | IONAL FRIDGE . (LEFT HINGE) (RIGHT HINGE) | F7IBM36O1-L | -IN FRIDGE . (LEFT HINGE) (RIGHT HINGE) |
|---|---------------------|---|-------------------|---|
| Series | 7 | 00 | 7 | 00 |
| Finish | Professional Design | gn - Stainless Steel | Professional Desi | gn - Overlay Panel |
| PERFORMANCES/CAPACITY | , | | | , |
| Anual Energy Usage | \$69 (57 | 71 kWh) | \$70 (58 | 80 kWh) |
| Noise Level db | . 4 | 10 | 4 | 40 |
| Fridge compartment capacity (cbft) | 14 | 4.7 | 1- | 4.7 |
| Flexzone Bottom-Drawer capacity (cbft) | 3 | 8.8 | 3 | 3.8 |
| FEATURES | | | | |
| Fridge Compartment | | | | |
| Glass Shelves | | 2 | | 2 |
| Adjustable Door Shelves | | 3 | | 3 |
| Micro shot-peened Stainless Steel Drawers | 2 Low Temp | | 2 Low Temp | |
| Flexzone Bottom-Drawer | | | | |
| White Painted Drawers | 1 | | 1 | |
| Internal Drawers | 1 + 1 ice tray | | 1 + 1 ice tray | |
| LED lighting | • | | | • |
| Ice Maker | • | | | • |
| Equipment | | | | |
| No Frost | • | | | • |
| Flexzone | | • | | • |
| TruPivot hinges | | • | | • |
| DIMENSIONS/WEIGHT | | | | |
| Width in | 35 - 3/8" | 900 mm | 35 - 3/8" | 900 mm |
| Height in | 83 - 1/2" | 2121 mm | 83 - 1/2" | 2121 mm |
| Depth without handle in | 25" | 635 mm | 24" | 610 mm |
| Minimum niche height in | 84" | 2134 mm | 84" | 2134 mm |
| Door clearance in | 57 - 7/8" | 1470 mm | 57 - 7/8" | 1470 mm |
| Door opening angle | 105° | | 105° | |
| Net Weight | 540 lbs (245 kg) | | 474 lbs | (215 kg) |
| POWER / RATINGS (115 V, 60 HZ) | | | | |
| Watts / Amps | 552W | - 4.8A | 552W | - 4.8A |
| Power Cable | Nema | 5-15P | Nema | 15-15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Fre | nch / Spanish |

SOFIA

PROFESSIONAL WINE CELLAR BUILT-IN WINE CELLAR





| CODE ID | 24" PROFESSIONAL WINE CELLAR F7PBW24S1-L (LEFT HINGE) F7PBW24S1-R (RIGHT HINGE) | | F7IBW2401-L | WINE CELLAR . (LEFT HINGE) (RIGHT HINGE) |
|--|---|-----------------------|-------------------|--|
| Series | 7 | 700 | 7 | 00 |
| Finish | Professional Desi | ign - Stainless Steel | Professional Desi | gn - Overlay Panel |
| PERFORMANCES/CAPACITY | | <u> </u> | | <u></u> |
| Noise Level db | | 41 | 4 | 11 |
| Riserva Compartment capacity (bottles) | | 36 | ; | 36 |
| Wine Cellar Compartment capacity (bottles) | | 18 | | 18 |
| Flexzone Bottom-Drawer capacity (cbft) | | 2 | | 2 |
| FEATURES | | | | |
| Riserva storage compartment | | | | |
| Natural wood shelves | | 6 | | 6 |
| Wine Cellar Compartment | | | | |
| Natural wood shelves | 3 | | | 3 |
| Flexzone Bottom-Drawer | | | | |
| White Painted Drawers | 1 | | 1 | |
| Internal Drawers | | 1 | 1 | |
| LED lighting | | • | • | |
| Glass door | • | | • | |
| Equipment | | | | |
| TriplePlay Refrigeration | • | | | • |
| No Frost | | • | • | |
| Flexzone | | • | • | |
| TruPivot hinges | | • | | • |
| DIMENSIONS/WEIGHT | | | | |
| Width in | 23 - 5/8" | 600 mm | 23 - 5/8" | 600 mm |
| Height in | 83 - 1/2" | 2121 mm | 83 - 1/2" | 2121 mm |
| Depth without handle in | 25" | 635 mm | 24" | 610 mm |
| Minimum niche height in | 84" | 2134 mm | 84" | 2134 mm |
| Door clearance in | 46" | 1168 mm | 46" | 1168 mm |
| Door opening angle | 105° | | 10 | 05° |
| Net Weight | 463 lbs 210 kg | | 386 lbs | 175 kg |
| POWER / RATINGS (115 V, 60 HZ) | | · | | |
| Watts / Amps | 472W - 4.1A | | 472W | ' - 4.1A |
| Power Cable | Nema 5-15P | | Nema | ı 5-15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | English / Fre | nch / Spanish |

FRIDGE

FRENCH DOOR FRIDGE



| CODE ID | 36" FRENCH DOOR + PROFESSIONAL HANDLE KIT | |
|---|--|--|
| CODE ID | F6FBM36S2 + F6HK36FFBS | |
| Finish | Stainless Steel | |
| CONTROLS | | |
| Cooling System | Duo Frost Free Cooling | |
| Control system | Electronic System | |
| CAPACITIES | · | |
| Total Net Volume, cu. ft. | 19.86 | |
| Fresh Food Net Volume, cu. ft. | 13.3 | |
| Freezer Net Volume, cu. ft. | 6.56 | |
| FRIDGE FEATURES | | |
| IonFresh | • | |
| Carbon Filter | • | |
| Interior Filtered Water Dispenser | • | |
| Electronic Control Display Type | Hidden Digital Display on Front Top Trim | |
| Auto Defrost | • | |
| Inner Illumination | Side Walls, Ceiling and Fresh Food Compartment | |
| Shelves | 4 Safety Glass | |
| Crispers | 2 | |
| Door Racks | 6 | |
| Compressor | Variable Speed VCC | |
| Large Pantry Drawer | • | |
| Fan Ventilation | • | |
| FREEZER FEATURES | | |
| Automatic Ice Maker | • | |
| Auto Defrost | • | |
| Interior LED Lighting | Ceiling | |
| TECHNICAL FEATURES | • | |
| Supply Voltage, V/Hz | 120V / 60Hz | |
| Rated Current, A | 2.2A | |
| Noise Level, dBA | 44 | |
| DIMENSIONS | | |
| H x W x D, in. | 69 - 3/4" x 35 - 3/4" x 26 - 13/16" | |
| H x W x D, cm | 177.1 x 90.8 x 68 | |
| Product Weight, lbs. | 289 lbs | |
| Product Weight, kg | 135 Kg | |
| PERFORMANCE | | |
| Energy Star Qualified | • | |
| Climatic Class | T | |
| Annual Energy Consumption, wh/year | 566 | |
| Cooling Gas | R600 | |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | |

DISHWASHER

DISHWASHER



| CODE ID | 24" STAINLESS STEEL BUILT-IN DISHWASHER + PROFESSIONAL HANDLE KIT |
|---|---|
| CODE ID | F6DWT24SS2 + F6UHK24DISH |
| Finish | Stainless steel |
| PERFORMANCES | |
| Position | Top of door |
| Туре | Electronic |
| DISPLAY | |
| Rinse Aid Indicator | LED Icon |
| LED Spot | Floor Illuminating Led Spotlight |
| MAIN FEATURES | |
| Loading Capacity (Place settings) | 16 |
| Tub Material | Stainless Steel |
| Inner Door Material | Stainless Steel |
| Overflow Protection | • |
| 5 Level Wash | • |
| Delay Timer | 1 -24 Hours |
| 3-way Euro Filter | |
| Drying Fan Assisted | Fan Assisted Condensation |
| Brushless DC™ Motor | • • • • • • • • • • • • • • • • • • • |
| Turbidity Sensor | • |
| Silent Operation | 45 dB(A) |
| | 3.7 |
| Interior High Loop with Air Gap | • |
| Self Clean Cycle | • |
| FUNCTION | |
| Half Load Function | • |
| Sanitize Function | • |
| RapidClean | • |
| ExtraRinse | • |
| PROGRAMS | |
| Number of Programs | 6 |
| Pots and Pans+ (167° F rinse temp.) | • |
| MixWash+ (142 - 145° F rinse temp.) | • |
| Regular Wash (142 - 145° F rinse temp.) | • |
| Daily Wash | • |
| Quick Wash (131° F) | • |
| Rinse & Hold | • |
| TECHNICAL FEATURES | |
| Permissible Water Pressure | 4.35 - 145 psi (0.3 - 10 bars) |
| Electrical Connection | 120 V, 12 A, 60Hz |
| Total Power | 1400 W (watts) |
| Heater Power | 1100 W (watts) |
| RACK SYSTEM | \ |
| Cutlery Basket | Sliding |
| Upper Rack (Inset Shelves) | 2 |
| Adjustable Upper Rack | Able to raise/lower the rack when fully loaded |
| 3rd Rack | Full-width |
| ENVIRONMENTAL | i dii Widili |
| ENERGY STAR® Qualified | • |
| Energy Consumption, Wh/year | |
| | 255 |
| Water Consumption gal/cycle | 3.5 - 5.0 |
| RoHS compliant (Lead Free) | • |
| DIMENSION/WEIGHT | |
| H x W x D, in. | 33 - 7/8" x 23 - 9/16" x 22 - 1/2" |
| H x W x D, cm | 86.1 x 59.8 x 57 |
| Product Weights, Ibs | 154 lbs |
| Product Weights, kg | 70 kg |
| INSTRUCTIONS FOR USE | |
| Use & Care Manual / Installation Manual | English / Spanish / French |

FULGOR MILANO

TECHNICAL DATA DISTINTO

TOUCH CONTROL OVEN







DISTINTO

TOUCH CONTROL OVEN







| CODE ID | 30" TOUCH CONTROL SINGLE OVEN F7SP30 | | |
|--|---|---|--|
| Series | | | |
| Finish | 700\$2 - Stainless Steel\$1 - Black Glass\$W1 - White Glass | | |
| CONTROL PANEL | Tillo didos | | |
| Control Type | Creactive Electronic Touch Control | | |
| Display: Clock - Temperature - Function | TFT 3.5" | | |
| Language | English (USA) / English (UK) / Fr Control Interface | rench / Spanish / Italian / German Chime Volume Setting | |
| | Full Touch: Functions - | | |
| | Recipes - Settings Menu | Date Format | |
| | Brightness Setting | Demo Mode | |
| OVEN | | | |
| Type | | Convection | |
| Temperature Regulation OVEN FUNCTIONS | Electronic Control (min/m | nax 170/550°F - 75/290°C) | |
| OVEN FUNCTIONS | Pyrolytic Self-Clean | Broil | |
| | True Convection | Dehydrate | |
| | Convection Broil | Thaw (Defrost) | |
| | Convection Roast | Proof (Warm) | |
| | Pizza (Lower Convection) | Keep warm (Warm Plus) | |
| ELECTRIC OVEN FEATURES | Bake | Oven Lights | |
| ELECTRIC OVEN PEATONES | Preset default temperature | Display instantaneous temperature | |
| | Child Door Lock | Control Display Lock | |
| | Sabbath Mode | 12/24 Hour Clock Formats | |
| | Automatic Fast Preheat | Temperature Display °C/°F | |
| O)(E)(DOOD(O) | Meat Probe | Event Logs (for Service) | |
| OVEN DOOR(S) Oven Glass Window | Large See T | Through Glass | |
| Door Cooling System | 4 Heat Resistant Glasses | | |
| Door Hinges | | y Steady Tilt | |
| OVEN CAVITY | | | |
| Gross Capacity (cbft) | | 1.4 | |
| Usable Capacity (cbft) Cavity Enamel Color | 4.1 Black | | |
| Rack Positions | Black 6 | | |
| Oven Lights | 3x20W Halogen | | |
| HEATING ELEMENTS (@240V) | | | |
| Broil Upper Heating Element | | 500 W | |
| Upper Auxiliary Element | | 032 W | |
| Concealed Bake Lower Heating Element Convection Element | | 000 W 300 W | |
| OVEN ACCESSORIES | EXI | | |
| Chrome Racks | | 2 | |
| Enameled Broiler Pan (basin + anti splash) | | 1 | |
| Telescopic Chrome Rack | | 1 | |
| DIMENSIONS/WEIGHT Overall dim - Width | 29 - 11/16" | 754 mm | |
| Overall dim - Height | 29 - 11/16 | 707 mm | |
| Overall dim - Depth | 24" | 610 mm | |
| Cut-out - Width | 28 - 7/16" | 722 mm | |
| Cut-out - Height (min) | 27 - 3/8" | 695 mm | |
| Cut-out - Depth (min) | 23 - 1/4" | 590 mm | |
| Gross Weight POWER / RATINGS (208/240 V, 60 HZ) | 183 lbs | 83 kg | |
| kW / Amps rating at 120-240V, 60Hz | 3 70kW | V - 15.4A | |
| kW / Amps rating at 120-208V, 60Hz | 3.70kW - 15.4A 3.50kW - 16.8A | | |
| Power Cable | Conduit | | |
| INSTRUCTIONS FOR USE | | | |
| Use & Care Manual / Installation Manual | English / Fre | ench / Spanish | |

| CODE ID | 30" TOUCH CONTROL DOUBLE OVEN F7DP30 | | |
|---|--|-----------------------------------|--|
| Series | 700 | | |
| | S1 - Stainless Steel | | |
| Finish | B1 - Black Glass | | |
| | W1 - White Glass | | |
| CONTROL PANEL | Creactive Electronic Touch Control | | |
| Control Type Display: Clock - Temperature - Function | | 3.5" | |
| Language | English (USA) / English (UK) / French / Spanish / Italian / German | | |
| | Control Interface | Chime Volume Setting | |
| | Full Touch: Functions - | Date Format | |
| | Recipes - Settings Menu | | |
| OVER 1 | Brightness Setting | Demo Mode | |
| OVEN Type | Dual True | Convection | |
| Temperature Regulation | | ax 170/550°F - 75/290°C) | |
| OVEN FUNCTIONS | Elocitorilo Gorillo (illinoril | ux 110,000 1 10,200 0, | |
| | Pyrolytic Self-Clean | Broil | |
| | True Convection | Dehydrate | |
| | Convection Broil | Thaw (Defrost) | |
| | Convection Roast | Proof (Warm) | |
| | Pizza (Lower Convection) | Keep warm (Warm Plus) | |
| ELECTRIC OVEN FEATURES | Bake | Oven Lights | |
| ELECTRIC OVEN FEATURES | Preset default temperature | Display instantaneous temperature | |
| | Child Door Lock | Control Display Lock | |
| | Sabbath Mode | 12/24 Hour Clock Formats | |
| | Automatic Fast Preheat | Temperature Display °C/°F | |
| | Meat Probe (Upper Oven Only) | Event Logs (for Service) | |
| OVEN DOOR(S) | | | |
| Oven Glass Window | | nrough Glass | |
| Door Cooling System | | stant Glasses | |
| Door Hinges OVEN CAVITY | Heavy Duty | Steady Tilt | |
| Gross Capacity (cbft) | 4 | .4 | |
| Usable Capacity (cbft) | | .1 | |
| Cavity Enamel Color | Black | | |
| Rack Positions | 6 | | |
| Oven Lights | 3x20W | Halogen | |
| HEATING ELEMENTS (@240V) | 0 | -00 M | |
| Broil Upper Heating Element Upper Auxiliary Element | | 500 W 032 W | |
| Concealed Bake Lower Heating Element | | 000 W | |
| Convection Element | | 300 W | |
| OVEN ACCESSORIES | | | |
| Chrome Racks | | 2 | |
| Enameled Broiler Pan (basin + anti splash) | | 1 | |
| Telescopic Chrome Rack | | 1 | |
| DIMENSIONS/WEIGHT | 00 4440 | | |
| Overall dim - Width | 29 - 11/16" 50 - 13/16" | 754 mm | |
| Overall dim - Height Overall dim - Depth | 24" | 1290 mm 610 mm | |
| Cut-out - Width | 28 - 7/16" | 722 mm | |
| Cut-out - Height (min) | 50" | 1270 mm | |
| Cut-out - Depth (min) | 23 - 1/4" | 590 mm | |
| Gross Weight | 326 lbs | 148 kg | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | |
| kW / Amps rating at 120-240V, 60Hz | 7.50kW - 31.2A | | |
| kW / Amps rating at 120-208V, 60Hz Power Cable | 6.30kW - 30.3A | | |
| INSTRUCTIONS FOR USE | Conduit | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | |
| USE α Vale Ivialiuai / Ilistaliativii Ivialiuai | English / Frei | ιστ / Οραποπ | |

DATA

COMBI SPEED OVEN





DISTINTO

COMBI STEAM OVEN





| CODE ID | | SPEED OVEN PD30S1 | | SPEED OVEN PD24S1 |
|---|-------------------------|----------------------|-------------------------------|----------------------|
| Туре | Microwave - | - Speed Oven | Microwave - Speed Oven | |
| Finish | Stainle | ess steel | Stainle | ess steel |
| Temperature Regulation | Elec | tronic | Elec | tronic |
| FUNCTIONS | | | | |
| Microwave | • | | • | |
| Convection roast | | • | | • |
| Convection broil | | • | | • |
| Broil | | • | | • |
| Recipes | | • | | • |
| Oven Lights | | • | | • |
| CONTROL PANEL | | | | |
| Control type | Dual Full Touch Ke | yboard - Electronic | Dual Full Touch Ke | yboard - Electronic |
| Display | | 3.5" | | 3.5" |
| Menu Recipes | | • | | • |
| | | 4 | | 4 |
| Language | | 4 | - | 4 |
| SPECIAL FEATURES | | | | |
| 12/24 hour clock format | | • | • | |
| °C/°F | | • | • | |
| OVEN DOOR(S) | | | | |
| Cool door | • | | | • |
| OVEN CPACITY | | | | |
| Gross Capacity (cuft) | 1.2 | | | .2 |
| Usable Capacity (cuft) | | .0 | | .0 |
| Cavity Enamel Color | Stainless Steel | | | ss Steel |
| Rack Positions | 3 1x20W Halogen | | | 3 |
| Oven Lights Broil Upper Heating Element | | | 1x20W Halogen 1500W (240V) | |
| Convection Element Wattage | | / (240V) / (240V) | 2300W (240V) | |
| ACCESSORIES | 230011 | (2400) | 200011 (2701) | |
| Chrome racks | | 1 | 1 | |
| Stainless Steel Tray | | • | | • |
| SIZE | | | | |
| Overall dim - width | 29 - 7/8" | 758 mm | 23 - 3/8" | 594 mm |
| Overall dim - height | 18 - 5/8" | 473 mm | 17 - 3/4" | 452 mm |
| Overall dim - depth | 21" | 533 mm | 21 - 1/2" | 546 mm |
| Recess (LxHxP) in/mm | (25 - 3/4" x 18" x 22") | (654 x 458 x 560 mm) | (23 - 3/8" x 18" x 22") | (560 x 458 x 560 mm) |
| POWER / RATINGS | | | | |
| KW/Amps rating at 240V, 60Hz | 3.4kW - 14A | | 3.4kW - 14A | |
| KW/Amps rating at 208V, 60Hz | 2.7kW - 13A | | 2.7kW - 13A | |
| Microwave input power | 1850 W | | 1850 W | |
| Microwave output power Frequency | 900 W | | 900 W | |
| Cable + Conduit | 2450 MHz | | 2450 MHz | |
| INSTRUCTION FOR USE | • | | · | |
| Use & Care Manual / Installation Manual | EN, SP, FR | | EN, SP, FR | |

| CODE ID | | STEAM OVEN CO30S1 | 24" COMBI S F7SCC | |
|---|----------------------------|----------------------|----------------------------|----------------------|
| Series | 7(| 00 | 70 | 00 |
| Finish | Stainle | ss Steel | Stainless Steel | |
| CONTROL PANEL | | | | |
| Programming | MODULAR | - Electronic | MODULAR - Electronic | |
| Control Type | Dual Full Tou | ich Keyboard | Single Full Tou | ıch Keyboard |
| Automatic Cooking | | • | • | , |
| Auto power off | | • | • | • |
| OVEN | | | | |
| Type | Steam | n Oven | Steam | Oven |
| Interiors | Stainle | ss Steel | Stainles | s Steel |
| Pull-down Door | | • | • | • |
| MAIN FEATURES | | | | |
| Gross Capacity (cu.ft) | 1 | .2 | 1. | 2 |
| Usable Capacity (cu.ft) | 1 | .0 | 1. | 0 |
| Tangential cooling ventilation | | • | • | 1 |
| Total no. of modes | 1 | 2 | 12 | 2 |
| PERFORMANCE | | | | |
| Maximum cooking temperature | 230°C | C / 446°F | 230°C | / 446°F |
| Automatic Cooking | | • | • | |
| Steam 210°F / 270°F | | • | • | |
| Steam Injection 210°F | | • | • | |
| Steam + Fan Assisted | | • | • | |
| Assisted Cleaning (CLEAN) | • | | | • |
| Power Output Grill (W) | 1 | 500 | 1: | 500 |
| Oven Lights | 1x20W Halogen | | 1x20W F | Halogen |
| Broil Upper Heating Element | 1500W (240V) | | 1500W | (240V) |
| Steamer | 1500W (240V) | | 1500W | (240V) |
| Lower Element Wattage | 300W | (240V) | 300W | (240V) |
| Convection Element Wattage | 2300W | / (240V) | 2300W | (240V) |
| SAFETY | | | | |
| Safety Door/ no. Panes of Glass | | /3 | •/3 | |
| Control Lock | | • | • | |
| ACCESSORIES | | | | |
| No. of Lights (20 W halogen) | | 1 | 1 | |
| Removable tank (liters / fl oz) | | / 45 | 1.4 / 45 | |
| No./Type of Gastronorm Trays | | less Steel | 2 / Stainless Steel | |
| Grey Metal Flat/no. of Supports | 1, | / 1 | 1/ | 1 |
| DIMENSIONS / WEIGHT | | | | |
| Width in/mm | 29 - 7/8" | 758 mm | 23 - 3/8" | 594 mm |
| Height in/mm | 18 - 5/8" | 473 mm | 17 - 3/4" | 452 mm |
| Depht in/mm | 21" | 533 mm | 21 - 1/2" | 546 mm |
| Recess (LxHxP) in/mm | (25 - 3/4" x 18" x 22") | (654 x 458 x 560 mm) | (23 - 3/8" x 18" x 22") | (560 x 458 x 560 mm) |
| POWER / RATINGS | | | | |
| KW/Amps rating at 240V, 60Hz | | - 13.7A | 3.3kW - 13.7A | |
| KW/Amps rating at 208V, 60Hz | | - 11.9A | 2.48kW - 11.9A | |
| Power Cord | Cable + | Conduit | Cable + Conduit | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | English / French / Spanish | |

OVEN 700





| CODE ID | 24" MULTIFUNCTION S F7SP | | |
|---|-------------------------------|----------------------|--|
| | | | |
| Series | 700 - I | | |
| Finish | Stainles | s Steel | |
| CONTROL PANEL | | | |
| Programming | MODULAR | Electronic | |
| Automatic Cooking | • | | |
| Auto power off | <u> </u> | | |
| OVEN | | | |
| Туре | Electi | | |
| Interiors | Black E | namel | |
| Pull-down Door | • | | |
| MAIN FEATURES | | | |
| Gross Capacity (cu.ft) | 2. | | |
| Usable Capacity (cu.ft) | 2. | 4 | |
| Tangential cooling ventilation | • | | |
| Total no. of modes | 1: | 5 | |
| PERFORMANCE | | | |
| Maximum cooking temperature | 250 | , C | |
| Automatic Cooking | • | | |
| Defrosting /Time/Weight) | • | • | |
| Sabbath Mode | • | | |
| Assisted Cleaning (CLEAN) | • | | |
| Power Output Grill (W) | 3450 | | |
| SAFETY | | | |
| Door with Safety Lock | • | | |
| Safety Door/ no. Panes of Glass | •/4 | | |
| Control Lock | • | | |
| ACCESSORIES | | | |
| No. of Lights (20 W halogen) | 1 | | |
| No./Type of Gastronorm Trays | 1 / Black | Enamel | |
| Grey Metal Flat/no. of Supports | 5 | | |
| DIMENSIONS / WEIGHT | | | |
| Width in/mm | 23 - 3/8" | 594 mm | |
| Height in/mm | 23 - 3/8" | 594 mm | |
| Depht in/mm | 21 - 7/8" | 556 mm | |
| Recess (LxHxP) in/mm | (22 - 1/6" x 23" x 22 - 1/6") | (560 x 595 x 560 mm) | |
| POWER / RATINGS | | , | |
| KW/Amps rating at 240V, 60Hz | 3.40kW - 14.2A | | |
| KW/Amps rating at 208V, 60Hz | 2.50kW - 12A | | |
| Power Cord | Cable + Conduit | | |
| INSTRUCTIONS FOR USE | Out I Collida | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | |

DISTINTO

WARMING DRAWER

| CODE ID | 24" WARMING DRAWER F4DWD24S1 | | |
|---|---------------------------------|-----------------------|--|
| Туре | Warmin | g Drawer | |
| Front finish | Pa | nel | |
| Internal shelf | Stainle | ss Steel | |
| Compatible with ovens | F7SP24S1 - F1SM24S2 - F | 7SC024S1 - F7DSPD24S1 | |
| PERFORMANCE | | | |
| Maximum temperature | 185°F | / 85°C | |
| Cooking at low temperature (slow cooking) | | | |
| Leavening | | • | |
| Heating dishes and food | | • | |
| Slow close assistance | | - | |
| Open / Close push - pull system | | • | |
| CONTROL | | | |
| Thermostat | 86°F - 185°F | / 30°C - 85°C | |
| Fan assisted | | • | |
| Function Indicator / Thermostat on/off | | • | |
| SAFETY | | | |
| Safety front | • | | |
| ELECTRICAL SPECIFICATIONS | | | |
| Max power absorbed (W) | 400 |) W | |
| Power (V-Hz) | 120 V / 60 Hz | | |
| Power cord | • | | |
| Plug | · | | |
| CAPACITY | | | |
| Volume (cbft-litri) | 0,53 | 15 | |
| DIMENSIONS | | | |
| Overall dim - Width | 23 - 7/16" | 595 mm | |
| Overall dim - Height | 6" | 153 mm | |
| Overall dim - Depth | 21 - 7/16" | 545 mm | |
| Cut-out - Width | 22 - 1/16" | 560 mm | |
| Cut-out - Height | 5 - 1/2" | 140 mm | |
| Cut-out - Depth | 22 - 1/16" | 560 mm | |
| WEIGHT | | | |
| Net Weight | 29 lbs | 13 Kg | |
| Gross Weight | 34 lbs | 15 Kg | |



| CODE ID | 30" OVEN 400 F4SP30S3 | | |
|--|----------------------------|--------------------------|--|
| | 1 101 0000 | | |
| Series | 40 | | |
| Finish | Stainles | ss Steel | |
| CONTROL PANEL | | | |
| Control Type | Elect | | |
| Display: Clock - Temperature - Timer | White | | |
| Language | Eng | lish | |
| OVEN | | | |
| Туре | True Cor | | |
| Temperature Regulation | Electronic Control (min/m | ax 120/485°F - 50/250°C) | |
| OVEN FUNCTIONS | | | |
| | Pyrolytic Self-Clean | Bake | |
| | True Convection | Broil | |
| | Convection Bake | Thaw (Defrost) | |
| | Convection Broil | Oven Lights | |
| | Convection Roast | | |
| ELECTRIC OVEN FEATURES | | | |
| | Temperature | Display °C/°F | |
| OVEN DOOR(S) | · | | |
| Oven Glass Window | Large See Th | nrough Glass | |
| Door Cooling System | 4 Heat Resis | | |
| Door Hinges | Heavy Duty | | |
| OVEN CAVITY | ,, | | |
| Gross Capacity (cbft) | 4.4 | | |
| Usable Capacity (cbft) | 4.1 | | |
| Cavity Enamel Color | Black | | |
| Rack Positions | 6 | | |
| Oven Lights | 3x20W I | | |
| HEATING ELEMENTS (@240V) | | | |
| Broil Upper Heating Element | 310 | n W | |
| Upper Auxiliary Element | 103 | | |
| Lower Auxiliary Element | 600 | | |
| Concealed Bake Lower Heating Element | 1400 W | | |
| Convection Element | 2500 W | | |
| OVEN ACCESSORIES | ∠DUU VV | | |
| Chrome Racks | 2 |) | |
| Enameled Broiler Pan (basin + anti splash) | | | |
| Telescopic Chrome Rack | Opti | | |
| DIMENSIONS/WEIGHT | Opti. | OTIGI | |
| Overall dim - Width | 29 - 11/16" | 754 mm | |
| Overall dim - Height | 27 - 7/8" | 707 mm | |
| Overall dim - Depth | 24" | 610 mm | |
| Cut-out - Width | 28 - 7/16" | 722 mm | |
| Cut-out - Width Cut-out - Height (min) | 27 - 1/4" | 692 mm | |
| Cut-out - Height (min) | 27 - 1/4 | 590 mm | |
| Gross Weight | 181 lbs | 82 kg | |
| POWER / RATINGS (208/240 V, 60 HZ) | TOTIDS | uz ny | |
| kW / Amps rating at 120-240V, 60Hz | 3.70kW | 16.14 | |
| kW / Amps rating at 120-240V, 60Hz | | | |
| Power Cable | 3.49kW - 17.1A | | |
| | Conduit | | |
| INSTRUCTIONS FOR USE | ,_ | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | |

WARMING DRAWER

| CODE ID | | ING DRAWER VD30S1 | 30" WARMIN F7IWD | |
|---|-----------------------|-------------------------|----------------------------|-----------------------|
| Туре | Warmir | ng Drawer | Warming Drawer | |
| Front finish | Stainle | ess Steel | Ove | lav |
| Internal shelf | | nox | Inc | , |
| Compatible with ovens | F7SP30S1 - F7DSPD30S1 | - F7DSCO30S1 - F4SP30S3 | F7SP30S1 - F7DSPD30S1 - | F7DSC030S1 - F4SP30S3 |
| PERFORMANCE | | | | |
| Maximum temperature | 194°I | F / 90°C | 194°F / | ′ 90°C |
| Cooking at low temperature (slow cooking) | | • | • | |
| Leavening | | • | • | |
| Heating dishes and food | | • | • | |
| Slow close assistance | | - | - | |
| Open / Close push - pull system | | • | • | |
| CONTROL | | | | |
| Thermostat | 86°F - 194°F | - / 30°C - 90°C | 86°F - 194°F / 30°C - 90°C | |
| Fan assisted | | • | • | |
| Function Indicator / Thermostat on/off | | • | • | |
| SAFETY | | | | |
| Safety front | • | | • | |
| ELECTRICAL SPECIFICATIONS | | | | |
| Max power absorbed (W) | 11 | 00W | 110 | DW . |
| Power (V-Hz) | 120/60 | | 120 | [′] 60 |
| Power cord | • | | • | |
| Plug | • | | • | |
| CAPACITY | | | | |
| Volume (cbft-litri) | 2,1 | 61.4 | 2,1 | 61.4 |
| DIMENSIONS | | • | | |
| Overall dim - Width | 29 - 5/8" | 754 mm | 29 - 5/8" to 29 - 7/8" | 754 mm to 758 mm |
| Overall dim - Height | 10 - 3/8" | 264 mm | 10 - 3/8" | 264 mm |
| Overall dim - Depth | 23" | 583 mm | 23" | 583 mm |
| Door Depth with Overlay | 15/16" | 24 mm | 7/8" | 22 mm |
| Cut-out - Width | 28 - 7/16" | 722 mm | 28 - 7/16" | 722 mm |
| Cut-out - Height | 9 - 1/4" | 235 mm | 9 - 1/4" | 235 mm |
| Cut-out - Depth | 24" | 610 mm | 24" | 610 mm |
| WEIGHT | | | | |
| Net Weight | 67.2 lbs | 30.5 Kg | 62.8 lbs | 28.5 Kg |
| Gross Weight | 74.1 lbs | 33.6 Kg | 69.7 lbs | 31.6 Kg |



MULTIFUNCTION EASY-CLEAN OVEN





| | CON AND INTERIOR CONTRACTOR | LOFI F OLFAN OVEN | |
|--|--------------------------------------|-------------------------------|--|
| CODE ID | 30" MULTIFUNCTION F1SP | I SELF-CLEAN OVEN 30S3 | |
| Opring | | 20 | |
| Series | 10 | | |
| Finish | Stainles | ss Steel | |
| CONTROL PANEL | | | |
| Control Type | Elect | | |
| Display: Clock - Timer - Temperature | White LED | | |
| Language | English | | |
| OVEN | | | |
| Type | Elect | ronic | |
| Temperature Regulation | Electroni (min/max 120/48 | c Control 85°F - 50/250°C) | |
| OVEN FUNCTIONS | (, | 30 : 00,200 0, | |
| OVEN FUNCTIONS | Duralitie Calf Class | Bake | |
| - | Pyrolytic Self-Clean True Convection | Broil | |
| - | Convection Bake | Thaw (Defrost) | |
| - | Convection Bake Convection Broil | | |
| - | | Oven Lights | |
| OAC OVEN FEATURES | Convection Roast | | |
| GAS OVEN FEATURES | Towns cont. | DiI 90/9F | |
| 0/EN B00B(0) | Temperature | e Display °C/°F | |
| OVEN DOOR(S) | | 1.01 | |
| Oven Glass Window | <u> </u> | nrough Glass | |
| Door Cooling System | 4 Heat Resis | | |
| Door Hinges | Heavy Duty | | |
| Handle Style | Tubular Steel | | |
| OVEN CAVITY | | | |
| Gross Capacity (cbft) | 3.0 | | |
| Usable Capacity (cbft) | 2.8 | | |
| Cavity Enamel Color | | ack | |
| Rack Positions | | 1 | |
| Oven Lights | 2x20W | Halogen | |
| HEATING ELEMENTS (@240V) | | | |
| Broil Upper Heating Element | | 100 W | |
| Upper Auxiliary Element | 10 | 032 W | |
| Lower Auxiliary Element | 600 W | | |
| Concealed Bake Lower Heating Element | 1400 W | | |
| Convection Element | 25 | 500 W | |
| OVEN ACCESSORIES | | | |
| Chrome Racks | 2 | 2 | |
| Enameled Broiler Pan (basin + anti splash) | • | 1 | |
| Telescopic Chrome Rack | Opti | onal | |
| DIMENSIONS/WEIGHT | | | |
| Overall dim - Width | 29 - 3/8" | 745 mm | |
| Overall dim - Height | 23 - 3/16" | 589 mm | |
| Overall dim - Depth | 22 - 1/16" | 560 mm | |
| Cut-out - Width | 28" | 710 mm | |
| Cut-out - Height (min) | 23" | 585 mm | |
| Cut-out - Depth (min) | 24" | 610 mm | |
| Gross Weight | 148 lbs | 67 kg | |
| POWER / RATINGS (208/240 V, 60 HZ) | | . • | |
| kW / Amps rating at 120-240V, 60Hz | 3.63kW - 15.6A | | |
| kW / Amps rating at 120-208V, 60Hz | | - 17.4A | |
| Power Cable | | | |
| INSTRUCTIONS FOR USE | Conduit | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | |
| OSE & Care Mariuar / Installation Mariual | English / Fren | icii / opailisii | |

| CODE ID | | N EASY-CLEAN OVEN M30S3 | | N EASY-CLEAN OVEN 1/24S2 | |
|--|------------------|----------------------------|----------------------------|-----------------------------|--|
| Series | 100 | | 100 | | |
| Finish | Stainle | ss Steel | Stainle | Stainless Steel | |
| CONTROL PANEL | | | | | |
| Control Type | 2 Knobs / 3 | Touch Buttons | 2 Knobs / 3 T | Fouch Buttons | |
| Display: Clock - Timer | | e LED | | e LED | |
| OVEN | | | Will LLD | | |
| Туре | Elec | tronic | Electronic | | |
| | | nanical Control | | anical Control | |
| Temperature Regulation | | 40°F - 50/285°C) | 1 | 80°F - 50/250°C) | |
| OVEN FUNCTIONS | | | | 1 | |
| | Convection | Bake | Convection | Bake | |
| | Convection Bake | Oven Lights | Convection Bake | Oven Lights | |
| | Convection Broil | Broil | Convection Broil | Broil | |
| | Convection Roast | | Convection Roast | | |
| OVEN DOOR(S) | | | | | |
| Oven Glass Window | | hrough Glass | | hrough Glass | |
| Door Cooling System | | stant Glasses | | stant Glasses | |
| Door Hinges | Heavy Dut | y Steady Tilt | Heavy Duty | / Steady Tilt | |
| Handle Style | Tubula | ar Steel | Tubula | ar Steel | |
| OVEN CAVITY | | | | | |
| Gross Capacity (cbft) | 3.0 | | 2.6 | | |
| Usable Capacity (cbft) | 2 | 2.8 | 2.4 | | |
| Cavity Enamel Color | ВІ | ack | Black | | |
| Rack Positions | 4 | | | 5 | |
| Oven Lights | 2x20W Halogen | | 1x20W | Halogen | |
| HEATING ELEMENTS (@240V) | | | | | |
| Broil Upper Heating Element | 310 | 00 W | 120 | 00 W | |
| Upper Auxiliary Element | 103 | 32 W | 100 | 00 W | |
| Lower Auxiliary Element | | - | | - | |
| Concealed Bake Lower Heating Element | 2100 W | | 1100 W | | |
| Convection Element | - | | 230 | 00 W | |
| OVEN ACCESSORIES | | | | | |
| Chrome Racks | | 2 | | 2 | |
| Enameled Broiler Pan (basin + anti splash) | 1 (bas | in only) | 1 | | |
| Telescopic Chrome Rack | Opt | ional | Opt | ional | |
| DIMENSIONS/WEIGHT | · | | · | | |
| Overall dim - Width | 29 - 3/8" | 745 mm | 23 - 3/8" | 594 mm | |
| Overall dim - Height | 23 - 3/16" | 589 mm | 23 - 3/8" | 594 mm | |
| Overall dim - Depth | 22 - 1/16" | 560 mm | 21 - 7/8" | 556 mm | |
| Cut-out - Width | 28" | 710 mm | 22 - 1/16" | 560 mm | |
| Cut-out - Height (min) | 23" | 585 mm | 23" | 585 mm | |
| Cut-out - Depth (min) | 24" | 610 mm | 22 - 1/16" | 560 mm | |
| Gross Weight | 148 lbs | 67 kg | 90 lbs | 41 kg | |
| POWER / RATINGS (208/240 V, 60 HZ) | | <u> </u> | | <u> </u> | |
| kW / Amps rating at 120-240V, 60Hz | 3.63kW | / - 15.6A | 2.35kW - 9.8A | | |
| kW / Amps rating at 120-208V, 60Hz | | / - 13.7A | 1.80kW - 8.6A | | |
| Power Cable | | nduit | Conduit | | |
| INSTRUCTIONS FOR USE | | | 00. | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / French / Spanish | | |



| CODE ID | 24" BUILT-IN MICROWAVE F7DMW24S2 | | |
|---|--|--|--|
| MW Types | Drawer | | |
| Drawer Opening | Open/Close Button | | |
| Finish | Stainless Steel / Black Glass | | |
| Oven Floor | Patterned Glass | | |
| CONTROL PANEL | | | |
| Control Panel Location | Center Top | | |
| Control Panel Type | Touch Control | | |
| Display Type | LCD | | |
| Display Color | White on Black Background | | |
| CAPACITIES | | | |
| Cavity Size (cu.ft) | 1.2 | | |
| FEATURES | | | |
| Timer/Setting | • | | |
| Power Selection | 11 levels | | |
| Output Power (watts) | 950 | | |
| Interior Light | Incandescent | | |
| Start/+30 Sec | • | | |
| Clock | | | |
| Multi-Stage Cooking | 4 | | |
| Control Lock | • | | |
| Demo Mode | | | |
| Microwave ON Indicator | | | |
| End of Cooking Reminder | | | |
| Auto Start | • | | |
| Standby Mode | • | | |
| Sensor | Popcorn / Reheat | | |
| Sensor Cook Menu | 11 (Baked Potatoes, Sweet Potatoes, Fish/ Seafood, Brown Rice, White Rice, Quick Fresh Vegetables, Longer Fresh Vegetables, Steamer Bag, Frozen Vegetables, Ground Meat, Frozen Entrees) | | |
| Melt, Soft & Warm Options | 5 (Butter, Chocolate, Ice Cream, Cream Cheese, Syrup, Dessert Topping) | | |
| Defrost | 6 (Ground Meat, Steaks/Chops, Boneless Poultry, Bone-in Poultry, Roast, Casserole or Soup) | | |
| Other Menus | 3 (Beverage Reheat, Hot Water, Hot Cereal) | | |
| TECHNICAL FEATURES | | | |
| Supply Voltage, V/Hz | 120V/ 60Hz | | |
| Rated Current, A | 14.5 A | | |
| DIMENSIONS | | | |
| Cavity Dimension (WxDxH) | 17-5/16" x 16-9/16" x 7-1/8" | | |
| Exterior Dimension (WxDxH) | 23-7/8" x 23-3/8" x 16" | | |
| Carton Dimension (WxDxH) | 29-1/4" x 27-7/8" x 21-1/2" | | |
| Net Weight / Gross Weight | 74.0 lbs / 85.8 lbs | | |
| INSTRUCTIONS FOR USE | | | |
| Use & Care Manual / Installation Manual | English / French | | |

MICROWAVES



| 24" COUNTER-TOP MICROWAVE F4MW024S1 | |
|--|--|
| No Handle - Push Button Open | |
| CounterTop or with Trim Kit | |
| Stainless Steel | |
| | |
| Electronic - Touch Control | |
| 2 Lines LCD - Segment Style | |
| White Fonts on Black Background | |
| | |
| 2.0 | |
| | |
| 11 levels | |
| 11 (Baked Pototates, Fish Seafood, Fresh Vegetables, Frozen Entrees, Frozen Snacks, Frozen Vegetables, Ground Meat, Rice, Sensor Reheat, Popcorn, Poultry) | |
| 5 (Scrambled Eggs, Bacon, Hot Cereal, Heat Rolls/Muffins, Frozen Breakfast Foods) | |
| 5 (Meal in a Cup, Hot Dogs in Buns, Soup, Microwave Pizza, Frozen Sandwich) | |
| 5 (Saucy Chicken, Hawaiian Pork, Fiesta Chili, Glazed Salmon, Healthy Frittata) | |
| 5 (Beef Wraps, Mexican Chicken, Italian Salad, Tuna Macaroni, Garden Medley) | |
| 4 (Steaks Chops or Fish, Chicken Pieces, Roast, Casserole/Soup) | |
| 3 (Ground Meat, Boneless Poultry, Bone-in Chicken Pieces) | |
| 2 (to make Coffee or Tea, to sensor Reheat Beverage) | |
| 5 (Child Lock, Audible Signal Elimination, Auto Start, Language / Weight Selection, Clock On/Off) | |
| 1 Incandescent | |
| | |
| 120V/ 60Hz | |
| 2.2 A | |
| | |
| 17 - 3/8" x 18 - 5/8" x 10 - 1/4" | |
| 23 - 15/16" x 19 - 1/4" x 13 - 3/8" | |
| 51.1 lbs / 64.1 lbs | |
| _ | |
| English / French | |
| | |

MICROWAVES



DISTINTO

COFFEE MACHINE



| CODE ID | 30" MICROWAVE OVEN | |
|---|--|--|
| CODE ID | F4OTR30S1 | |
| MW Types | Turn Table / Recessed Cavity | |
| Finisi | Stainless Steel | |
| CONTROL PANEL | Stall liess Steel | |
| | Electronic - Touch Control | |
| Control System | White LED | |
| Display & Digital Clock | White LED | |
| CAPACITIES | 10 | |
| Cavity Size (cu.ft) | 1.8 | |
| TT Diameter | 12.8" (ø 325mm) | |
| FEATURES | | |
| Timer | 99 min. 99 sec. (plus Sound On/Off for 3 sec holding) | |
| Power Selection | 10 levels | |
| Charcoal Filter | 1 | |
| Air Filters | 2 | |
| Ventilation Type Available | Front / Top / Rear | |
| Ventilation Fan Speed | Turbo / High / Low / Off (max 450 CFM) | |
| Sensor Cook Menu | 4 (Frozen Entrée, Frozen Vegetable, Reheat, Potato) | |
| Programmed Cook | 2 (Beverage, Popcorn) | |
| Soften/ Melt Menu | 4 (Butter, Chocolate, Icecream, Cheese) | |
| Defrost | Time/ Weight | |
| Keep Warm | • | |
| Chrome Rack | 1 ea | |
| Oven Light | 1 LED (On/Off) | |
| CookTop Light | 1 LED (On/Off) | |
| Turnable | On/ Off | |
| Display On/Off | Clock key | |
| Security | Child-Safe Lock-Out Feature | |
| Express Cook | 1~6 minutes | |
| Extra Seconds | +30 sec | |
| TECHNICAL FEATURES | . 55 555 | |
| Supply Voltage, V/Hz | 120V/60Hz | |
| Rated Current. A | 2.2 A | |
| Noise Level, dBA | 2.2 A 44 | |
| DIMENSIONS/WEIGHT | | |
| Cavity Dimension (W x D x H) | 20 - 5/8" x 14 - 7/8" x 10" | |
| Exterior Dimension (W x D x H) | 29 - 9/10" x 15 - 9/10" x 16 - 3/10" | |
| Carton Dimension (W x D x H) | 33 - 5/16" x 18 - 13/16" x 20 - 5/16" | |
| Net Weight / Gross Weight | 33 - 5/16" x 18 - 13/16" x 20 - 5/16" 51.1 lbs / 64.1 lbs | |
| INSTRUCTIONS FOR USE | 31.1 IDS / 04.1 IDS | |
| | Franksk / Fransk | |
| Use & Care Manual / Installation Manual | English / French | |

| CODE ID | 30" BUILT-IN COFFEE M/ F7BC24B1 + F | | |
|---|--|-------------|--|
| Туре | Coffee m | achine | |
| Finish | Stainless | s steel | |
| PERFORMANCE | | | |
| Total no. of modes | 30 | | |
| Automatic modes | Coffee, Steam | , Hot water | |
| Programming | Full touch e | lectronic | |
| Energy efficiency | A | | |
| Annual energy consume (kWh) | 45 | | |
| Water tank capacity | 60 fl. oz | 1,8 L | |
| Coffee container capacity | 7 oz | 200 g | |
| Automatic coffee grinder with 13 levels regulations | • | | |
| Cups of coffee nr. | 2 | | |
| Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm | • | | |
| Retractable dispenser for steam and hot water | • | | |
| LED lighting | • | | |
| Filter | • | | |
| Automatic cleaning program | • | | |
| Milk container 25 fl.oz | • | | |
| Drip tray | • | | |
| Water tank refill warning light | • | | |
| ELECTRICAL SPECIFICATION (120V, 60 HZ) | | | |
| Max rated power (W) | 1350 | W | |
| Pump pressure (bar) | 15 | | |
| SIZE | | | |
| Overall dim - width | 29 -7/8" | 758 mm | |
| Overall dim - height | 18 - 3/4" | 476 mm | |
| Overall dim - depth Cutout - width | 18 - 3/4" 476 mm | | |
| Cutout - wath Cutout - height (min) | 28 - 3/8" 722 mm 18 - 1/4" 463 mm | | |
| Cutout - neight (min) Cutout - depth (min) | 22" 560 mm | | |
| INSTRUCTION FOR USE | 22 | 300 111111 | |
| Use & Care Manual / Installation Manual | EN, SP, | FR | |

COFFEE MACHINE



560 mm

EN, SP, FR

| CODE ID | 24" BUILT-IN CO F7BC | | |
|---|-------------------------|--------------|--|
| Torre | Coffee machine | | |
| Type | | | |
| Finish | Black | Glass | |
| PERFORMANCE | | | |
| Total no. of modes | 30 | | |
| Automatic modes | Coffee, Stear | n, Hot water | |
| Programming | Full touch | electronic | |
| Energy efficiency | A | | |
| Annual energy consume (kWh) | 45 | 5 | |
| Water tank capacity | 60 fl. oz | 1,8 L | |
| Coffee container capacity | 7 oz | 200 g | |
| Automatic coffee grinder with 13 levels regulations | • | | |
| Cups of coffee nr. | 2 | | |
| Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm | • | | |
| Retractable dispenser for steam and hot water | • | | |
| LED lighting | • | | |
| Filter | • | | |
| Automatic cleaning program | • | | |
| Milk container 25 fl.oz | • | | |
| Drip tray | • | | |
| Water tank refill warning light | | | |
| ELECTRICAL SPECIFICATION (120V, 60 HZ) | | | |
| Max rated power (W) | 1350 W | | |
| Pump pressure (bar) | 15 | | |
| SIZE | | | |
| Overall dim - width | 23 - 3/8" | 594 mm | |
| Overall dim - height | 18" | 456 mm | |
| Overall dim - depth | 18 - 3/4" | 475 mm | |
| Cutout - width | 22" | 560 mm | |
| Cutout - height (min) | 18" | 458 mm | |
| | | | |

22"

DISTINTO

COFFEE MACHINE



| CODE ID | 24" BUII | LT-IN COFFEE MACHINE F7BC24B1 |
|---|----------------|----------------------------------|
| Туре | Coffee machine | |
| Finish | | Black Glass |
| PERFORMANCE | | |
| Total no. of modes | | 30 |
| Automatic modes | Coff | ree, Steam, Hot water |
| Programming | | ull touch electronic |
| Energy efficiency | | A |
| Annual energy consume (kWh) | | 45 |
| Water tank capacity | 60 fl. oz | 1,8 L |
| Coffee container capacity | 7 oz | 200 g |
| Automatic coffee grinder with 13 levels regulations | | • |
| Cups of coffee nr. | | 2 |
| Coffee dispenser height regulation 3.14 - 3.93 in / 80 - 100 mm | • | |
| Retractable dispenser for steam and hot water | • | |
| LED lighting | • | |
| Filter | • | |
| Automatic cleaning program | • | |
| Milk container 25 fl.oz | • | |
| Drip tray | • | |
| Water tank refill warning light | | • |
| ELECTRICAL SPECIFICATION (120V, 60 HZ) | | |
| Max rated power (W) | | 1350 W |
| Pump pressure (bar) | | 15 |
| SIZE | | |
| Overall dim - width | 23 - 3/8" | 595 mm |
| Overall dim - height | 17 - 7/8" | 455 mm |
| Overall dim - depth | 18 - 3/4" | 475 mm |
| Cutout - width | 22" | 560 mm |
| Cutout - height (min) | 18" 458 mm | |
| Cutout - depth (min) | 22" 560 mm | |
| INSTRUCTION FOR USE | | |
| Use & Care Manual / Installation Manual | | EN, SP, FR |

Cutout - depth (min)

INSTRUCTION FOR USE

Use & Care Manual / Installation Manual

PRO GAS COOKTOP



| CODE ID | 36" PRO GAS COOK TOP F4PGK365S1 | |
|--|---|-----------------|
| Finish | Stainles | o Chaol |
| CONTROL PANEL | Stamles | is Steel |
| Control Type | Kno | .ha |
| COOKTOP | NIC | 008 |
| | GAS (NO | 2 ov 1 D\ |
| Type | Matte Blac | |
| Cooking Surface | ivialle biad | ж Епапіеі |
| GAS COOKTOP FEATURES | | |
| Electric Re-ignition system | | |
| Flame-out sensing | | <u> </u> |
| Dual Crown Brass Burner | | <u> </u> |
| Simmer Plate | Opti | |
| Small Pot Insert (for single burners only) | Opti | |
| Wok Ring (for dual burner only) | Opti | |
| Heavy Duty Cast Iron Grates | 3 | |
| Cooking Zones | 5 | |
| Brass Burners types | Aluminum Dual Fla | |
| Power (Max/Min) (Front-L) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Rear-L) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Front Center) | 20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W | |
| Power (Max/Min) (Rear-R) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| Power (Max/Min) (Front-R) | 15000 (BTU/h) - 4400W / 1300 (BTU/h) - 382W | |
| DIMENSIONS/WEIGHT | | |
| Overall dim - Width | 36" | 914 mm |
| Overall dim - Height | 3 - 7/16" | 87 mm |
| Overall dim - Depth | 21" | 533 mm |
| Cut-out - Width (min - max) | 34 - 1/2" , 34 - 11/16" | 876 mm - 881 mm |
| Cut-out - Height (min) | 3 - 3/8" | 87 mm |
| Cut-out - Depth (min - max) | 19 - 9/16" , 19 - 3/4" | 497 mm - 502 mm |
| Gross Weight | 73 lbs | 33.2 kg |
| POWER / RATINGS (120 V, 60 HZ) | , | - |
| Amps | 0.1A | |
| Max Power | 80000 (BTU/h) - 23480W | |
| Power Cable | Nema 5-15P | |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / Fren | nch / Spanish |

DISTINTO

PRO GAS COOKTOP



| CODE ID | 30" PRO GAS COOK TOP F4PGK305S1 | | |
|--|---|-----------------------|--|
| Finish | Stainles | ss Steel | |
| CONTROL PANEL | | | |
| Control Type | Kno | obs | |
| СООКТОР | | | |
| Туре | GAS (No | G or LP) | |
| Cooking Surface | Matte Blad | ck Enamel | |
| GAS COOKTOP FEATURES | | | |
| Electric Re-ignition system | • | • | |
| Flame-out sensing | • | • | |
| Dual Crown Brass Burner | • | • | |
| Simmer Plate | Opti | onal | |
| Small Pot Insert (for single burners only) | Opti | onal | |
| Wok Ring (for dual burner only) | Optional | | |
| Heavy Duty Cast Iron Grates | 2 | | |
| Cooking Zones | | | |
| Burners types | Aluminum Dual Flame/Simmer Burner | | |
| Power (Max/Min) (Front-L) | 8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W | | |
| Power (Max/Min) (Rear-L) | 10500 (BTU/h) - 3080W / 2200 (BTU/h) - 645W | | |
| Power (Max/Min) (Center) | 20000 (BTU/h) - 5880W | / 750 (BTU/h) - 220W | |
| Power (Max/Min) (Rear-R) | 10500 (BTU/h) - 3080W | / 2200 (BTU/h) - 645W | |
| Power (Max/Min) (Front-R) | 8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W | | |
| DIMENSIONS/WEIGHT | | | |
| Overall dim - Width | 30" | 762 mm | |
| Overall dim - Height | 3 - 7/16" | 87 mm | |
| Overall dim - Depth | 21" | 533 mm | |
| Cut-out - Width (min - max) | 28" - 1/2 , 28" - 11/16 | 724 mm - 729 mm | |
| Cut-out - Height (min) | 3 - 3/8" | 87 mm | |
| Cut-out - Depth (min - max) | 19" - 9/16 , 19" - 3/4 | 497 mm - 502 mm | |
| Gross Weight | 61 lbs | 27.5 kg | |
| POWER / RATINGS (120 V, 60 HZ) | 1 2 | | |
| Amps | 0.1A | | |
| Max Power | 57000 (BTU/h) - 16730W | | |
| Power Cable | Nema | 5-15P | |
| INSTRUCTIONS FOR USE | | | |
| Use & Care Manual / Installation Manual | English / Frer | nch / Spanish | |

GAS COOKTOP





DISTINTO

GAS COOKTOP





| CODE ID | 44" GAS COOKTOP F4GK42S1 | | 36" GAS COOKTOP F4GK36S1 | |
|--|--|-------------------------------|--|-----------------------|
| Series | 4 | 00 | 400 | |
| Finish | Stainle | ss Steel | Stainless Steel | |
| CONTROL PANEL | Ciamioso Ciasi | | Otali iio | |
| Control Type | Kn | obs | Knobs | |
| СООКТОР | 141000 | | | |
| Туре | GAS (N | G or LP) | GAS (NG or LP) | |
| Cooking Surface | | ck Enamel | | ack Enamel |
| GAS COOKTOP FEATURES | | | | |
| Electric Re-ignition system | | • | | • |
| Flame-out sensing | | • | | • |
| Dual Flame Burner | | • | | • |
| Simmer Plate | Opt | ional | Opt | tional |
| Small Pot Insert (for single burners only) | Opt | ional | Opt | tional |
| Wok Ring (for dual burner only) | Opt | ional | Opt | tional |
| Heavy Duty Cast Iron Grates | | 4 | · | 3 |
| Cooking Zones | | 4 | 5 | |
| Burners types | Sealed Burners (all) - Dual Fla | ame/Simmer Burner (only Left) | Sealed Burners (all) - Dual Flame/Simmer Burner (only Center | |
| Power (Max/Min) (Left) | 18000 (BTU/h) - 5275W / 700 (BTU/h) - 205W | | | - |
| Power (Max/Min) (Front-L) | | - | 6300 (BTU/h) - 1850W | / 1300 (BTU/h) - 380W |
| Power (Max/Min) (Rear-L) | | - | 9000 (BTU/h) - 2640W / 1300 (BTU/h) - 380W | |
| Power (Max/Min) (L Center) | 4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W | | | - |
| Power (Max/Min) (Front Center) | - | | 18000 (BTU/h) - 5275W | / 700 (BTU/h) - 205W |
| Power (Max/Min) (R Center) | 9000 (BTU/h) - 2640W | / 1300 (BTU/h) - 380W | | - |
| Power (Max/Min) (Front-R) | - | | 4000 (BTU/h) - 1175W | / 1000 (BTU/h) - 295W |
| Power (Max/Min) (Rear-R) | | - | 12000 (BTU/h) - 3520W / 2200 (BTU/h) - 645W | |
| Power (Max/Min) (Right) | 15000 (BTU/h) - 4400W | / 2700 (BTU/h) - 790W | | - |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 44" | 1120 mm | 36" | 910 mm |
| Overall dim - Height | 5 - 3/16" | 132 mm | 5 - 3/16" | 132 mm |
| Overall dim - Depth | 16 - 3/4" | 425 mm | 20 - 1/16" | 510 mm |
| Cut-out - Width (min - max) | 43 - 1/8", 43 - 1/4" | 1096 mm - 1099 mm | 34 - 7/8", 35" | 886 mm - 889 mm |
| Cut-out - Height (min) | 2 - 15/16" | 74 mm | 2 - 15/16" | 74 mm |
| Cut-out - Depth (min - max) | 15 - 15/16", 16 - 1/16" | 405 mm - 408 mm | 19 - 5/16", 19 - 3/8" | 490 mm - 493 mm |
| Gross Weight | 45 lbs | 20 kg | 55 lbs | 25 kg |
| POWER / RATINGS (120 V, 60 HZ) | | | | |
| Amps | 0.1A | | 0.1A | |
| Max Power | 46000 (BTU/h) - 13475W | | 52300 (BTU/h) - 15320W | |
| Power Cable | Nema | 5 - 15P | Nema | 5 - 15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Fre | nch / Spanish |

| CODE ID | 30" GAS COOKTOP F4GK30S1 | | | COOKTOP (24S1 |
|--|--|-------------------------------|--|-----------------------|
| Series | 4 | 00 | 400 | |
| Finish | Stainle | ess Steel | Stainle | ss Steel |
| CONTROL PANEL | | | | |
| Control Type | Knobs | | Knobs | |
| COOKTOP | | | | |
| Туре | GAS (N | IG or LP) | GAS (NG or LP) | |
| Cooking Surface | Matte Bla | ick Enamel | Matte Bla | ck Enamel |
| GAS COOKTOP FEATURES | | | | |
| Electric Re-ignition system | | • | | • |
| Flame-out sensing | | • | | • |
| Dual Flame Burner | | • | | • |
| Simmer Plate | Opt | tional | Opt | ional |
| Small Pot Insert (for single burners only) | Opt | tional | Opt | ional |
| Wok Ring (for dual burner only) | Optional | | | - |
| Heavy Duty Cast Iron Grates | | 2 | 4 | |
| Cooking Zones | | 5 | 4 | |
| Burners types | Sealed Burners (all) - Dual FI | ame/Simmer Burner (only Left) | Sealed Burners (all) - Dual Flame/Simmer Burner (only Front-L) | |
| Power (Max/Min) (Left) | 18000 (BTU/h) - 5275W / 700 (BTU/h) - 205W | | | - |
| Power (Max/Min) (Front-L) | - | | 18000 (BTU/h) - 5275W | / 700 (BTU/h) - 205W |
| Power (Max/Min) (Rear-L) | - | | 6300 (BTU/h) - 1850W | / 1300 (BTU/h) - 380W |
| Power (Max/Min) (Front Center) | 4000 (BTU/h) - 1175W / 1000 (BTU/h) - 295W | | | - |
| Power (Max/Min) (Rear Center) | 12000 (BTU/h) - 3520W | / 2200 (BTU/h) - 645W | | - |
| Power (Max/Min) (Front-R) | 6300 (BTU/h) - 1850W | / 1300 (BTU/h) - 380W | 4000 (BTU/h) - 1175W | / 1000 (BTU/h) - 295W |
| Power (Max/Min) (Rear-R) | 9000 (BTU/h) - 2640W | / 1300 (BTU/h) - 380W | 12000 (BTU/h) - 3520W / 2200 (BTU/h) - 645W | |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 30" | 760 mm | 24 - 1/2" | 620 mm |
| Overall dim - Height | 5 - 3/16" | 132 mm | 5 - 3/16" | 132 mm |
| Overall dim - Depth | 20 - 1/16" | 510 mm | 20 - 1/16" | 510 mm |
| Cut-out - Width (min - max) | 29", 29 - 1/8" | 737 mm - 740 mm | 23 - 1/2", 23 - 5/8" | 597 mm - 600 mm |
| Cut-out - Height (min) | 2 - 15/16" | 74 mm | 2 - 15/16" | 74 mm |
| Cut-out - Depth (min - max) | 19 - 5/16", 19 - 3/8" | 490 mm - 493 mm | 19 - 5/16", 19 - 3/8" | 490 mm - 493 mm |
| Gross Weight | 45 lbs | 20 kg | 41 lbs | 19 kg |
| POWER / RATINGS (120 V, 60 HZ) | | | | |
| Amps | 0.1A | | 0.1A | |
| Max Power | 49300 (BTU/h) - 14440W | | 40300 (BTU/h) - 11800W | |
| Power Cable | Nema | 5 - 15P | Nema 5 - 15P | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / French / Spanish | |

DATA

INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



| CODE ID | 36" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT36S1 | | | |
|---|--|-----------------------------------|-----------------------|---------------|
| Series | 700 | | | |
| Finish | | Ceramic glass with aluminum frame | | |
| CONTROL PANEL | | | | |
| Control Type | | Touch (| Control | |
| СООКТОР | | | | |
| Type | | INDUC | CTION | |
| Cooking Surface | | Ceramio | Glass | |
| Slider Touch Control for Power Setting | | • | | |
| Digital Display for Power Level | | • | | |
| INDUCTION COOKTOP FEATURES | | | | |
| Pot Detection System | | • | | |
| Bridge double zone | | • | | |
| Power Levels | | 1 to | 9 | |
| Warming Function 158°F / 70°C | | • | | |
| Booster/Fast Boil Function for Each Zone | • | | | |
| Auto-boil and Reduce for Each Zone | • | | | |
| Residual Heat Indication | | • | | |
| Individual Timer for each Zone | • | | | |
| Child Lock | • | | | |
| Key Lock (LED) | • | | | |
| Pause/recall (LED) | • | | | |
| General ON/OFF Key (LED) | | • | | |
| Cooking Zones | | 5 | <u> </u> | |
| Burners types (Front-L) - Power (Max/Booster) | Inductor | 11" | (280 mm) | 2300W / 3600W |
| Burners types (Rear Central) - Power (Max/Booster) | Inductor | 7" | (180 mm) | 1850W / 3000W |
| Burners types (Front Central) - Power (Max/Booster) | Inductor | 5 - 3/4" | (145 mm) | 1400W / 2200W |
| Burners types (Rear/Front-R) - Power (Max/Booster) | (Octagonal) Inductor | 7 - 1/2" x 8 - 1/2" | (190 mm x 220 mm) | 2000W / 3600W |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | | 36 - 3/16" | 919 mm | |
| Overall dim - Height | | 4" | 100 mm | |
| Overall dim - Depth | | 21 - 3/16" | 538 mm | |
| Cut-out - Width (Tolerance) | | 34 - 5/8" tol. 1/16" | 879 mm - (tol. 1 mm) | |
| Cut-out - Height | | 2 - 5/8" + conduit 1 - 1/16" | 67 mm + conduit (27 n | nm) |
| Cut-out - Depth (Tolerance) | | 19 - 3/8" tol. 1/16" | 492 mm - (tol. 1 mm) | |
| Gross Weight | | 55 lbs | 25 kg | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | |
| kW / Amps rating at 240V, 60Hz | | 10.8 kW | | |
| kW / Amps rating at 208V, 60Hz | 9.4 kW - 45A | | | |
| Power Cable | | Con | duit | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | | |

DISTINTO

INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM



| CODE ID | 30" INDUCTION COOKTOP WITH BRUSHED ALUMINUM TRIM F7IT30S1 | | | |
|--|--|----------------------|--------------------|---------------|
| Series | | 7 | 700 | |
| Finish | | Ceramic glass w | ith aluminum frame | |
| CONTROL PANEL | | | | |
| Control Type | | Touch | Control | |
| COOKTOP | | | | |
| Type | | INDU | JCTION | |
| Cooking Surface | | Ceram | nic Glass | |
| Slider Touch Control for Power Setting | | | • | |
| Digital Display for Power Level | | | • | |
| INDUCTION COOKTOP FEATURES | | | | |
| Pot Detection System | | | • | |
| Power Levels | | 1 | to 9 | |
| Warming Function 158°F / 70°C | | | • | |
| Booster/Fast Boil Function for Each Zone | | | • | |
| Auto-boil and Reduce for Each Zone | • | | | |
| Residual Heat Indication | • | | | |
| Individual Timer for each Zone | • | | | |
| Child Lock | • | | | |
| Key Lock (LED) | • | | | |
| Pause/recall (LED) | • | | | |
| General ON/OFF Key (LED) | • | | | |
| Cooking Zones | | | 4 | |
| Burners types (Front-L) - Power (Max/Booster) | Inductor | 11" | (280 mm) | 2300W / 3600W |
| Burners types (Rear Central) - Power (Max/Booster) | Inductor | 7" | (180 mm) | 1850W / 3000W |
| Burners types (Rear-R) - Power (Max/Booster) | Inductor | 5 - 3/4" | (145 mm) | 1400W / 2200W |
| Burners types (Front-R) - Power (Max/Booster) | Inductor | 7" | (180 mm) | 1850W / 3000W |
| DIMENSIONS/WEIGHT | | | , | |
| Overall dim - Width | | 30 - 3/8" | 771 mm | |
| Overall dim - Height | | 4" | 100 mm | |
| Overall dim - Depth | | 21 - 3/16" | 538 mm | |
| Cut-out - Width (Tolerance) | | 28 - 3/4" tol. 1/16" | 730 mm - (tol. 1 r | nm) |
| Cut-out - Height | 2 - 5/8" + conduit 1 - 1/16" 67 mm + conduit (27 mm) | | | |
| Cut-out - Depth (Tolerance) | 19 - 7/16" tol. 1/16" 494 mm - (tol. 1 mm) | | | |
| Gross Weight | 40 lbs 18 kg | | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | · | |
| kW / Amps rating at 240V, 60Hz | 7.2 kW - 30A | | | |
| kW / Amps rating at 208V, 60Hz | 6.45 kW - 31A | | | |
| Power Cable | Conduit | | | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | | |

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



| CODE ID | 36" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT36S2 | | | |
|---|---|----------------------------|----------------------|--|
| Series | | 600 | | |
| Finish | Ceramic glas | s with aluminum frame | | |
| CONTROL PANEL | | | | |
| Control Type | Touch Control | | | |
| СООКТОР | | | | |
| Туре | | RADIANT | | |
| Cooking Surface | Ce | ramic Glass | | |
| RADIANT COOKTOP FEATURES | | | | |
| Power Setting | Peacock S | Slider Touch Control | | |
| Digital Display for Power Level | | 5 | | |
| Low Power Scale for Delicate Cooking | | • | | |
| Control Display Lock | | • | | |
| Automatic Fast Boil Function | • | | | |
| Hot Surface Indication | • | | | |
| Timer Functions | 1+5 | | | |
| Timer Display | · | | | |
| Acoustic Buzzer | · | | | |
| Failure Codes Indication | • | | | |
| Cooking Zones | | 5 | | |
| Burners types (Front/Rear-L) - Power | 7" | (180 mm) | 1800W | |
| Bridge Element - Power | | | 800W | |
| Burners types (Central) - Power | 9"/ 7"/ 5" | (230 mm / 180 mm / 127 mm) | 2500W / 1600W / 800W | |
| Burners types (Rear-R) - Power | 7" | 180 mm | 1800W | |
| Burners types (Front-R) - Power | 6" | 153 mm | 1200W | |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 36 - 3/16" | 919 mm | | |
| Overall dim - Height | 3 - 5/16" + conduit 15/16" | 84 mm + conduit (24 mm) | | |
| Overall dim - Depth | 21 - 3/16" | 538 mm | | |
| Cut-out - Width (min - max) | 34 - 1/16", 34 - 5/16" | 865 mm - 872 mm | | |
| Box - Height | 3 - 1/16" + conduit 15/16" | 78 mm + conduit (24 mm) | | |
| Cut-out - Depth (min - max) | 19 - 1/4", 19 - 5/8" 490 mm - 498 mm | | | |
| Gross Weight | 44 lbs 20 kg | | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | |
| kW / Amps rating at 240V, 60Hz | 9.90kW - 41.3A | | | |
| kW / Amps rating at 208V, 60Hz | 7.44kW - 35.8A | | | |
| Power Cable | Conduit | | | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | | |

DISTINTO

RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM



| CODE ID | 30" RADIANT COOKTOP WITH TOUCH CONTROL WITH BRUSHED ALUMINUM TRIM F6RT30S2 | | | |
|---|---|----------------------------|----------------------|--|
| Series | 600 | | | |
| Finish | Ceramic glas | s with aluminum frame | | |
| CONTROL PANEL | <u> </u> | | | |
| Control Type | To | ouch Control | | |
| COOKTOP | | | | |
| Туре | | RADIANT | | |
| Cooking Surface | Ce | eramic Glass | | |
| RADIANT COOKTOP FEATURES | | | | |
| Power Setting | Peacock S | Slider Touch Control | | |
| Digital Display for Power Level | | 4 | | |
| Low Power Scale for Delicate Cooking | | • | | |
| Control Display Lock | • | | | |
| Automatic Fast Boil Function | • | | | |
| Hot Surface Indication | • | | | |
| Timer Functions | 1+4 | | | |
| Timer Display | | • | | |
| Acoustic Buzzer | • | | | |
| Failure Codes Indication | | • | | |
| Cooking Zones | | 4 | | |
| Burners types (Front-L) - Power | 6" | (153 mm) | 1200W | |
| Burners types (Rear-L) - Power | 9"/7"/5" | (230 mm / 180 mm / 127 mm) | 2500W / 1600W / 800W | |
| Burners types (Rear-R) - Power | 8"/5" | (203 mm / 127 mm) | 2200W / 800W | |
| Burners types (Front-R) - Power | 6" | (153 mm) | 1200W | |
| DIMENSIONS/WEIGHT | | 7 | | |
| Overall dim - Width | 30 - 3/8" | 771 mm | | |
| Overall dim - Height | 3 - 5/16" + conduit 15/16" | 84 mm + conduit (24 mm) | | |
| Overall dim - Depth | 21 - 3/16" | 538 mm | | |
| Cut-out - Width (min - max) | 28 - 11/16", 28 - 15/16" | 729 mm - 735 mm | | |
| Box - Height | 3 - 1/16" + conduit 15/16" | 78 mm + conduit (24 mm) | | |
| Cut-out - Depth (min - max) | 19 - 1/4", 19 - 5/8" | 490 mm - 498 mm | | |
| Gross Weight | 36 lbs | 16 kg | | |
| POWER / RATINGS (208/240 V, 60 HZ) | | | | |
| kW / Amps rating at 240V, 60Hz | 7.10kW - 29.6A | | | |
| kW / Amps rating at 208V, 60Hz | 5.33kW - 25.6A | | | |
| Power Cable | Conduit | | | |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | | | |

RADIANT COOKTOP WITH KNOB CONTROL WITH BRUSHED ALUMINUM TRIM



| CODE ID | 24" RADIANT COOKTOP WITH KNOB CON F3RK | NTROL WITH BRUSHED ALUMINUM TRIM (2482 |
|--|---|---|
| Series | 30 | 00 |
| Finish | Ceramic glass wit | h aluminum frame |
| CONTROL PANEL | | |
| Control Type | Kno | obs |
| СООКТОР | | |
| Туре | RAD | IANT |
| Cooking Surface | Cerami | c Glass |
| RADIANT COOKTOP FEATURES | | |
| Power Setting | 9 Le | evels |
| Digital Display for Power Level | - | |
| Hot Surface Indication | • | |
| Cooking Zones | 4 | 4 |
| Burners types (Front-L) - Power | | mm / 121 mm 1900W / 800W |
| Burners types (Rear-R) - Power | | 0 mm 1200W |
| Burners types (Front-R - Rear-L) - Power | 7" 180 | 0 mm 1800W |
| DIMENSIONS/WEIGHT | | |
| Overall dim - Width | 24" | 618 mm |
| Overall dim - Height | 3 - 5/16" + conduit 15/16" | 84 mm + conduit (24 mm) |
| Overall dim - Depth | 21 - 3/16" | 538 mm |
| Cut-out - Width (min - max) | 22 - 5/8", 22 - 13/16" | 574 mm - 580 mm |
| Box - Height | 3 - 1/16" + conduit 15/16" | 78 mm + conduit (24 mm) |
| Cut-out - Depth (min - max) | 19 - 1/4", 19 - 9/16" | 490 mm - 497 mm |
| Gross Weight | 30 lbs | 14 kg |
| POWER / RATINGS (208/240 V, 60 HZ) | | |
| kW / Amps rating at 240V, 60Hz | 6.10kW | |
| kW / Amps rating at 208V, 60Hz | 4.58kW | |
| Power Cable | Con | duit |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / Fren | nch / Spanish |

DISTINTO

INSERT HOOD





| CODE ID | 34" INSEF F6BP | | 28" INSEI F4BP | |
|---|--------------------------|-----------------|----------------------------|-----------------|
| Series | 60 | 00 | 400 | |
| Finish | Insert - Stai | nless Steel | Insert - Stainless Steel | |
| CONTROL PANEL | | | | |
| Control Type | 4 speed mech | anical control | 4 speed mechanical control | |
| PERFORMANCES | | | | |
| Output (CFM) | 60 | 00 | 600 | |
| Sound Level (dB) | 69 | | 69 | |
| Motor | One | | One | |
| Venting Type | Ducted and recirculating | | Ducted and recirculating | |
| FEATURES | | | | |
| Filter Style | Pro Baffle | | Baffle | |
| Lighting | 2 x 1.2W LED | | 2 x 1.2W LED | |
| Duct diameter | 5 - 15/16" | 150 mm | 5 - 15/16" | 150 mm |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 34 - 1/4" | 870 mm | 28 - 3/8" | 720 mm |
| Overall dim - Height | 13 - 1/8" | 330 mm | 10 - 5/8" | 270 mm |
| Overall dim - Depth | 18 - 1/2" | 470 mm | 15 - 3/4" | 400 mm |
| Cut-out (w x d) | 32 - 1/16" x 16 - 1/2" | 814 mm x 419 mm | 26 - 1/8" x 14 - 1/4" | 664 mm x 362 mm |
| Gross Weight | 51 lbs | 23 kg | 33 lbs | 15 kg |
| POWER / RATINGS (115 V, 60 HZ) | | | | |
| Watts / Amps | 430W | - 3.8A | 430W | - 3.8A |
| Power Cable | Nema | 5-15P | Nema | 5-15P |
| INSTRUCTIONS FOR USE | | | | · |
| Use & Care Manual / Installation Manual | English / Fren | ich / Spanish | English / French / Spanish | |

DISTINTO

UNDERCABINET HOOD





| CODE ID | | ABINET HOOD C36S1 | 30" UNDERCA F4UC | |
|---|----------------|----------------------|--------------------------------|----------------|
| Series | 4 | 00 | 40 | 00 |
| Finish | Undercabinet - | Stainless Steel | Undercabinet - Stainless Steel | |
| CONTROL PANEL | | | | |
| Control Type | 4 speed push | button control | 4 speed push | button control |
| PERFORMANCES | | | | |
| Output (CFM) | 4 | 50 | 45 | 50 |
| Sound Level (dB) | 69 | | 69 | |
| Motor | One | | One | |
| Venting Type | Ducted and | recirculating | Ducted and recirculating | |
| FEATURES | | | | |
| Filter Style | Ва | ffle | Ba | ffle |
| Lighting | 2 x 1.2 | W LED | 2 x 1.2 | W LED |
| Duct diameter | 5 - 15/16" | (150 mm) | 5 - 15/16" | (150 mm) |
| DIMENSIONS/WEIGHT | | | | |
| Overall dim - Width | 35 - 7/8" | 910 mm | 29 - 13/16" | 760 mm |
| Overall dim - Height | 10 - 1/4" | 260 mm | 18" | 460 mm |
| Overall dim - Depth | 21 - 1/8" | 535 mm | 24" | 610 mm |
| Gross Weight | 46 lbs | 21 kg | 61 lbs | 28 kg |
| POWER / RATINGS (115 V, 60 HZ) | | | | |
| Watts / Amps | 280W | - 2.50A | 280W - | - 2.50A |
| Power Cable | Nema | 5-15P | Nema | 5-15P |
| INSTRUCTIONS FOR USE | | | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish | English / Frer | nch / Spanish |

CHIMNEY HOOD



| CODE ID | | WALL HOOD W36S1 |
|---|--------------------|--------------------|
| Series and Finish | Distinto series | - Stainless Steel |
| CONTROL PANEL | | |
| Control Type | Electronic control | |
| PERFORMANCES | | |
| Output (CFM) | 600 | |
| Sound Level (dB) | 69 | |
| Motor | Single Motor | |
| FEATURES | | |
| Filter Style | Pro | Baffle |
| Lighting | 2 x 1.2 | W LED |
| Duct diameter | 6" | 15.24 cm |
| DIMENSIONS/WEIGHT | | |
| Overall dim - Width | 36" | 898 mm |
| Overall dim - Height | 43 - 1/4" | 1097 mm |
| Overall dim - Depth | 19 - 3/4" | 500 mm |
| Gross Weight | 49 lbs | 22 kg |
| POWER / RATINGS (120 V, 60 HZ) | | |
| Watts / Ampere | 430W | - 2.8A |
| Power Cable | Nema | 5-15P |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish |

NEW

DISTINTO

CHIMNEY HOOD



| CODE ID | | YWALL HOOD V30S1 |
|---|-----------------|---------------------|
| Series and Finish | Distinto series | - Stainless Steel |
| CONTROL PANEL | | |
| Control Type | Electron | ic control |
| PERFORMANCES | | |
| Output (CFM) | 600 | |
| Sound Level (dB) | 69 | |
| Motor | Single Motor | |
| FEATURES | | |
| Filter Style | | Baffle |
| Lighting | | W LED |
| Duct diameter | 6" | 15.24 cm |
| DIMENSIONS/WEIGHT | | |
| Overall dim - Width | 30" | 762 mm |
| Overall dim - Height | 43 - 1/4" | 1097 mm |
| Overall dim - Depth | 19 - 3/4" | 500 mm |
| Gross Weight | 45 lbs | 20.4 kg |
| POWER / RATINGS (120 V, 60 HZ) | | |
| Watts / Ampere | 430W | - 2.8A |
| Power Cable | Nema | 5-15P |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / Fre | nch / Spanish |

DISTINTO

BUILT-IN FRIDGE



| | 36" BUILT-IN FRIDGE | |
|---|---|--|
| CODE ID | F7IBM36O1-L (LEFT HINGE) F7IBM36O1-R (RIGHT HINGE) | |
| Series | 700 | |
| Finish | Distinto - Overlay Panel | |
| PERFORMANCES/CAPACITY | Distinct Overlay Farier | |
| Annual Energy Usage | \$70 (580 kWh) | |
| Noise Level db | 40 | |
| Fridge compartment capacity (cbft) | 14.7 | |
| Flexzone Bottom-Drawer capacity (cbft) | 3.8 | |
| FEATURES | | |
| Fridge Compartment | | |
| Glass Shelves | 2 | |
| Adjustable Door Shelves | 3 | |
| Micro shot-peened Stainless Steel Drawers | 2 Low Temp | |
| Flexzone Bottom-Drawer | <u>'</u> | |
| White Painted Drawers | 1 | |
| Internal Drawers | 1 + 1 ice tray | |
| LED lighting | • | |
| Ice Maker | • | |
| Equipment | | |
| No Frost | • | |
| Flexzone | • | |
| TruPivot hinges | • | |
| DIMENSIONS/WEIGHT | | |
| Width in | 35 - 3/8" 900 mm | |
| Height in | 83 - 1/2" 2121 mm | |
| Depth without handle in | 24" 610 mm | |
| Minimum niche height in | 84" 2134 mm | |
| Door clearance in | 57 - 7/8" 1470 mm | |
| Door opening angle | 105° | |
| Net Weight | 474 lbs 215 kg | |
| POWER / RATINGS (115 V, 60 HZ) | | |
| Watts / Amps | 552W - 4.8A | |
| Power Cable | Nema 5-15P | |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / French / Spanish | |

BUILT-IN WINE CELLAR



| CODE ID | 24" BUILT-IN V F7IBW2401-L F7IBW2401-R (| (LEFT HINGE) |
|--|--|---------------|
| Series | 70 | 00 |
| Finish | Distinto - Ov | verlay Panel |
| PERFORMANCES/CAPACITY | | , |
| Noise Level db | 4 | 1 |
| Riserva Compartment capacity (bottles) | 3 | 6 |
| Wine Cellar Compartment capacity (bottles) | 1 | 8 |
| Flexzone Bottom-Drawer capacity (cbft) | 2 | 0 |
| FEATURES | | |
| Riserva storage compartment | | |
| Natural wood shelves | 6 | ò |
| Wine Cellar Compartment | | |
| Natural wood shelves | 3 | 3 |
| Flexzone Bottom-Drawer | | |
| White Painted Drawers | 1 | |
| Internal Drawers | 1 | |
| LED lighting | | |
| Glass door | • | 1 |
| Equipment | | |
| TriplePlay Refrigeration | • | 1 |
| No Frost | • | 1 |
| Flexzone | • | 1 |
| TruPivot hinges | • | |
| DIMENSIONS/WEIGHT | | |
| Width in | 23 - 5/8" | 600 mm |
| Height in | 83 - 1/2" | 2121 mm |
| Depth without handle in | 24" | 610 mm |
| Minimum niche height in | 84" | 2134 mm |
| Door clearance in | 46" | 1168 mm |
| Door opening angle | 10 | 5° |
| Net Weight | 386 lbs | 175 kg |
| POWER / RATINGS (115 V, 60 HZ) | | · · · |
| Watts / Amps | 472W | - 4.1A |
| Power Cable | Nema | |
| INSTRUCTIONS FOR USE | | |
| Use & Care Manual / Installation Manual | English / Fren | nch / Spanish |

FRIDGE

FRENCH DOOR FRIDGE



| CODE ID | 36" FRENCH DOOR FRIDGE + DISTINTO HANDLE KIT F6FBM36S2 + F7HK36FFBS |
|---|--|
| Finish | Stainless Steel |
| CONTROLS | |
| Cooling System | Duo Frost Free Cooling |
| Control system | Electronic System |
| CAPACITIES | |
| Total Net Volume, cu. ft. | 19.86 |
| Fresh Food Net Volume, cu. ft. | 13.3 |
| Freezer Net Volume, cu. ft. | 6.56 |
| FRIDGE FEATURES | |
| IonFresh | • |
| Carbon Filter | • |
| Interior Filtered Water Dispenser | • |
| Electronic Control Display Type | Hidden Digital Display on Front Top Trim |
| Auto Defrost | • |
| Inner Illumination | Side Walls, Ceiling and Fresh Food Compartment |
| Shelves | 4 Safety Glass |
| Crispers | 2 |
| Door Racks | 6 |
| Compressor | Variable Speed VCC |
| Large Pantry Drawer | • |
| Fan Ventilation | • |
| FREEZER FEATURES | |
| Automatic Ice Maker | • |
| Auto Defrost | • |
| Interior LED Lighting | Ceiling |
| TECHNICAL FEATURES | |
| Supply Voltage, V/Hz | 120V / 60Hz |
| Rated Current, A | 2.2A |
| Noise Level, dBA | 44 |
| DIMENSIONS | |
| H x W x D, in. | 69 - 3/4" x 35 - 3/4" x 26 - 13/16" |
| H x W x D, cm | 177.1 x 90.8 x 68 |
| Product Weight, lbs. | 289 lbs |
| Product Weight, kg | 135 Kg |
| PERFORMANCE | · · |
| Energy Star Qualified | • |
| Climatic Class | T |
| Annual Energy Consumption, wh/year | 566 |
| Cooling Gas | R600 |
| INSTRUCTIONS FOR USE | |
| Use & Care Manual / Installation Manual | English / French / Spanish |



INTEGRATED DISHWASHER



| CODE ID 24" STAINLESS STEEL BUILT-IN DISHWASHER + DISTINTO HANDLE KIT F6DWT24SS2 + F7UHK24DISH Finish PERFORMANCES Position Top of door Type Electronic DISPLAY Rinse Aid Indicator LED Icon LED Spot Floor Illuminating Led Spotlight MAIN FEATURES Loading Capacity (Place settings) Tub Material Stainless Steel Inner Door Material Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Fan Assisted Fan Assisted Condensation Brushless DCTM Motor Turbidity Sensor Silent Operation 1-24 Hours 3-way Euro Filter Finction Finction Fan Assisted Condensation Fan Assisted Fan Assisted Fan Assisted Condensation Fan Assisted Fan Assisted Fan Assisted Fan Assisted Fan Assisted Fan Assisted Condensation Function 45 dB(A) Interior High Loop with Air Gap Self Clean Cycle FINCTION Half Load Function Particulars Particulars Stainless STEEL BUILT-IN DISHWASHER + DISTINTO HANDLE KIT FEMILIZATION FINCTION FI | |
|--|--|
| PERFORMANCES Position Top of door Type Electronic DISPLAY Electronic Rinse Aid Indicator LED Icon LED Spot Floor Illuminating Led Spotlight MAIN FEATURES Loading Capacity (Place settings) Loading Capacity (Place settings) 16 Tub Material Stainless Steel Inner Door Material Stainless Steel Overflow Protection • 5 Level Wash • Delay Timer 1 -24 Hours 3-way Euro Filter • Drying Fan Assisted Fan Assisted Condensation Brushless DC™ Motor • Turbidity Sensor • Silent Operation 45 dB(A) Interior High Loop with Air Gap • Self Clean Cycle • FUNCTION + Half Load Function • Sanitize Function • | |
| PERFORMANCES Position Top of door Type Electronic DISPLAY Electronic Rinse Aid Indicator LED Icon LED Spot Floor Illuminating Led Spotlight MAIN FEATURES Loading Capacity (Place settings) Loading Capacity (Place settings) 16 Tub Material Stainless Steel Inner Door Material Stainless Steel Overflow Protection • 5 Level Wash • Delay Timer 1 -24 Hours 3-way Euro Filter • Drying Fan Assisted Fan Assisted Condensation Brushless DC™ Motor • Turbidity Sensor • Silent Operation 45 dB(A) Interior High Loop with Air Gap • Self Clean Cycle • FUNCTION + Half Load Function • Sanitize Function • | |
| Position Type Electronic DISPLAY Rinse Aid Indicator LED Icon LED Spot MAIN FEATURES Loading Capacity (Place settings) Tub Material Inner Door Material Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Brushless DC™ Motor Turbidity Sensor Silent Operation 45 dB(A) Interior High Loop with Air Gap Senifize Function Fan Assitze Function ■ Top of door Electronic Electro | |
| Type BISPLAY Rinse Aid Indicator LED Spot RINSE Aid Indicator LED Spot Floor Illuminating Led Spotlight MAIN FEATURES Loading Capacity (Place settings) Tub Material Inner Door Material Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Brushless DCTM Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function LED Icon LED I | |
| Rinse Aid Indicator LED Spot MAIN FEATURES Loading Capacity (Place settings) Tub Material Inner Door Material Overflow Protection 5 Level Wash Delay Timer Drying Fan Assisted Brushless DC™ Motor Turbidity Sensor Silent Operation Self Clean Cycle FUNCTION Half Load Function Floor Illuminating Led Spotlight Stainless Steel Overflow Patainess Steel Stainless Steel Stainless Steel Stainless Steel 1 -24 Hours 1 -24 Hours 1 -24 Hours 1 -24 Hours 4 - Condensation Fan Assisted Condensation Fan Assisted Condensation • Condensation • Condensation Floor Illuminating Led Spotlight Stainless Steel Overflow Patainess Steel Floor Illuminating Led Spotlight Floor Illuminating Led Spotlight All Cading Stainless Steel Stainless Steel Overflow Patainess Steel Intervel Hours Stainless Steel Overflow Patainess Steel Stainless Steel Overflow Patainess Steel Stainless Steel Intervel Patainess Steel Intervel Patainess Steel Stainless Steel Intervel Patainess Steel Interve | |
| LED Spot MAIN FEATURES Loading Capacity (Place settings) Tub Material Inner Door Material Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Brushless DC™ Motor Turbidity Sensor Silent Operation Self Clean Cycle FUNCTION Half Load Function Fan Assisted Spotlight Floor Illuminating Led Spotlight 16 Stainless Steel Stainless Steel Stainless Steel 10 11 Stainless Steel 11 Stainless Steel 11 Stainless Steel 11 12 14 15 15 16 16 16 16 16 16 17 17 18 19 19 19 19 19 19 19 19 19 | |
| MAIN FEATURES Loading Capacity (Place settings) 16 Tub Material Stainless Steel Inner Door Material Stainless Steel Overflow Protection • 5 Level Wash • Delay Timer 1 -24 Hours 3-way Euro Filter • Drying Fan Assisted Fan Assisted Condensation Brushless DC™ Motor • Turbidity Sensor • Silent Operation 45 dB(A) Interior High Loop with Air Gap • Self Clean Cycle • FUNCTION • Half Load Function • Sanitize Function • | |
| Loading Capacity (Place settings) Tub Material Stainless Steel Inner Door Material Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Brushless DC™ Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function • Stainless Steel Stainless Steel Otalines Steel Stainless Steel • Fan Assisted • • Silent Operation • Sanitize Function • Sanitize Function • • Stainless Steel Stainle | |
| Tub Material Stainless Steel Inner Door Material Stainless Steel Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Brushless DCTM Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function Stainless Steel | |
| Inner Door Material | |
| Overflow Protection 5 Level Wash Delay Timer 3-way Euro Filter Drying Fan Assisted Brushless DCTM Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function • • • • • • • • • • • • • | |
| 5 Level Wash • Delay Timer 1 -24 Hours 3-way Euro Filter • Drying Fan Assisted Fan Assisted Condensation Brushless DC™ Motor • Turbidity Sensor • Silent Operation 45 dB(A) Interior High Loop with Air Gap • Self Clean Cycle • FUNCTION Half Load Function • Sanitize Function • | |
| Delay Timer 1 -24 Hours 3-way Euro Filter • Drying Fan Assisted Fan Assisted Condensation Brushless DC™ Motor • Turbidity Sensor • Silent Operation 45 dB(A) Interior High Loop with Air Gap • Self Clean Cycle • FUNCTION Half Load Function • Sanitize Function • | |
| 3-way Euro Filter Drying Fan Assisted Brushless DC™ Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function • Fun Assisted Condensation • FUNCTION Sanitize Function • Fun Assisted Condensation • Fun Assisted Condensation • Silet Condensation • Self Clean Cycle FUNCTION Function • Sanitize Function • | |
| Drying Fan Assisted Brushless DC™ Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function Fan Assisted Condensation • • • • Fan Assisted Condensation • • Self B(A) • • Function • Sanitize Function • Fan Assisted Condensation • Fan Assisted Condensation • Fan Assisted Condensation • Sanitize Function • Fan Assisted Condensation • Fan Assisted Condensation • Sanitize Function • Fan Assisted Condensation | |
| Brushless DC™ Motor Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function • • • • • • • • • • • • • | |
| Turbidity Sensor Silent Operation Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function • | |
| Silent Operation 45 dB(A) Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function 45 dB(A) • • • • • • • • • • • • • | |
| Interior High Loop with Air Gap Self Clean Cycle FUNCTION Half Load Function Sanitize Function • | |
| Self Clean Cycle FUNCTION Half Load Function Sanitize Function • | |
| FUNCTION Half Load Function Sanitize Function • | |
| Half Load Function • Sanitize Function • | |
| Sanitize Function • | |
| | |
| Description of the second of t | |
| RapidClean • | |
| ExtraRinse • | |
| PROGRAMS | |
| Number of Programs 6 | |
| Pots and Pans+ (167° F rinse temp.) | |
| MixWash+ (142 - 145° F rinse temp.) | |
| Regular Wash (142 - 145° F rinse temp.) | |
| Daily Wash | |
| Quick Wash (131° F) | |
| Rinse & Hold • | |
| TECHNICAL FEATURES | |
| Permissible Water Pressure 4.35 - 145 psi (0.3 - 10 bars) | |
| Electrical Connection 120 V, 12 A, 60Hz | |
| Total Power 1400 W (watts) | |
| Heater Power 1100 W (watts) | |
| RACK SYSTEM | |
| Cutlery Basket Sliding | |
| Upper Rack (Inset Shelves) 2 | |
| Adjustable Upper Rack Able to raise/lower the rack when fully loaded | |
| 3rd Rack Full-width | |
| ENVIRONMENTAL | |
| ENERGY STAR® Qualified • | |
| Energy Consumption, Wh/year 255 | |
| Water Consumption gal/cycle 3.5 - 5.0 | |
| RoHS compliant (Lead Free) | |
| DIMENSION/WEIGHT | |
| H x W x D, in. 33 - 7/8" x 23 - 9/16" x 22 - 1/2" | |
| H x W x D, cm 86.1 x 59.8 x 57 | |
| Product Weights, lbs 154 lbs | |
| Product Weights, kg 70 kg | |
| INSTRUCTIONS FOR USE | |
| Use & Care Manual / Installation Manual English / Spanish / French | |

| CODE ID | 24" INTEGRATED DISHWASHER F6DWT24FI2 |
|--|--|
| Finish | Panel Ready |
| CONTROL PANEL | |
| Position | Top of door |
| Type | Electronic |
| DISPLAY | |
| Rinse Aid Indicator | LED Icon |
| LED Spot | Running Indicator Floor illuminating LED spotlight |
| MAIN FEATURES | |
| Loading Capacity (Place Settings) | 16 |
| Tub Material | Stainless Steel |
| Inner Door Material | Stainless Steel |
| Overflow Protection | • |
| 5 Level Wash | • |
| Delay Timer | 1 - 24 hours |
| 3-way Euro Filter | T E Mode |
| Drying fan assisted | Fan Assisted Condensation |
| Brushless DC™ Motor | i air Assisted Oriderisation |
| Turbidity Sensor | |
| Silent Operation | 45 dB(A) |
| Interior High Loop with Air Gap | • |
| Self Clean Cycle | • |
| FUNCTIONS | - |
| Half Load Function | • |
| Sanitize Function | |
| RapidClean | • |
| ExtraRinse | |
| PROGRAMS | - |
| Number of Programs | 6 |
| Pots and Pans+ (167° F rinse temp.) | • |
| MixWash+ (131 – 149° F rinse temp.) | • |
| Regular Wash (142 – 145°F rinse temp.) | |
| Daily Wash | |
| Quick Wash (131°F) | • |
| Rinse & Hold | |
| TECHNICAL FEATURES | • |
| | 405 445 mai (0.0, 40 ham) |
| Permissible Water Pressure | 4.35 - 145 psi (0.3 - 10 bars) |
| Electrical Connection | 120 V, 12 A, 60Hz |
| Total Power | 1400 W (watts) |
| Heater Power | 1100 W (watts) |
| RACK SYSTEM | Olidion |
| Cutlery Basket | Sliding |
| II D I // 10/ I) | |
| Upper Rack (Inset Shelves) | 2 |
| Adjustable Upper Rack | Able to raise/lower the rack when fully loaded |
| Adjustable Upper Rack 3rd Rack | _ |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS | Able to raise/lower the rack when fully loaded Full-width |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified | Able to raise/lower the rack when fully loaded Full-width • |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year | Able to raise/lower the rack when fully loaded Full-width • 255 |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle | Able to raise/lower the rack when fully loaded Full-width • 255 3.5 - 5.0 |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) | Able to raise/lower the rack when fully loaded Full-width • 255 |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) DIMENSIONS/WEIGHT | Able to raise/lower the rack when fully loaded Full-width 255 3.5 - 5.0 |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) DIMENSIONS/WEIGHT H x W x D, in. | Able to raise/lower the rack when fully loaded Full-width |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) DIMENSIONS/WEIGHT H x W x D, in. H x W x D, cm | Able to raise/lower the rack when fully loaded Full-width 255 3.5 - 5.0 33 - 7/8" x 23 - 9/16" x 22 - 1/2" 86.1 x 59.8 x 57 |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) DIMENSIONS/WEIGHT H x W x D, in. H x W x D, cm Product Weight, lbs. | Able to raise/lower the rack when fully loaded Full-width 255 3.5 - 5.0 33 - 7/8" x 23 - 9/16" x 22 - 1/2" 86.1 x 59.8 x 57 154 lbs. |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) DIMENSIONS/WEIGHT H x W x D, in. H x W x D, cm Product Weight, lbs. Product Weight, kg | Able to raise/lower the rack when fully loaded Full-width 255 3.5 - 5.0 33 - 7/8" x 23 - 9/16" x 22 - 1/2" 86.1 x 59.8 x 57 |
| Adjustable Upper Rack 3rd Rack ENVIRONMENTAL STANDARDS ENERGY STAR® Qualified Energy Consumption, Wh/year Water Consumption gal/cycle RoHS compliant (Lead Free) DIMENSIONS/WEIGHT H x W x D, in. H x W x D, cm Product Weight, lbs. | Able to raise/lower the rack when fully loaded Full-width 255 3.5 - 5.0 33 - 7/8" x 23 - 9/16" x 22 - 1/2" 86.1 x 59.8 x 57 154 lbs. |

DATA

FULGOR MILANO A FAMILY A PASSION



There are few places in the world where food has been the very backbone of a culture like it has been in Italy for centuries. A passion for cooking, creating and using local ingredients, has inspired generations of Italian families and has made the kitchen the heart of the home. The aroma of long hours of food preparation, tables filled with recipes handed down generation to generation, accompanied with the perfect local wine are moments that linger in our memories and give us a sense of home even when we are far away. These things are what being Italian is all about. The Meneghetti Family has brought us the Fulgor Milano line of products so that we too may be inspired to cook and create with this same passion at home. Every Fulgor Milano product has been designed and developed to not only meet or exceed expectations of performance and quality, but also provide a design that is uniquely Italian.

DESIGNED IN ITALY



UGO MARINELLO

IDA Award winning designer Ugo Marinello is passionate about his work and his desire to synthesize modern rationality with traditional design. A graduate of IUAV in Venice, he draws inspiration from the unique architecture of that city, using it as a foundation to bring innovative yet timeless design and quintessential Italian spirit to your home and kitchen throughout the Fulgor Milano line.

ALFRED HENDRICKX

Known internationally for his mid-century furniture collections, designer Alfred Hendrickx began incorporating the strong lines of industrial styling and materials like stainless steel early in his career. After many successful design collaborations in Europe, he turned his attention to the design of household appliances, notably marrying modern form and function for Meneghetti and Fulgor Milano.









FULGOR MILANO

Rosà - Vicenza - Italy www.fulgor-milano.com info@fulgor-milano.com